


MEDIA VISION TECHNOLOGY, INC.

FUSION CD16 S/E LMSI (650-0042-01)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Game/MIDI port, audio in (2), CD-interface, microphone in, stereo line in, stereo line out, LMSI connector, PC speaker connector
Data Bus	16-bit ISA

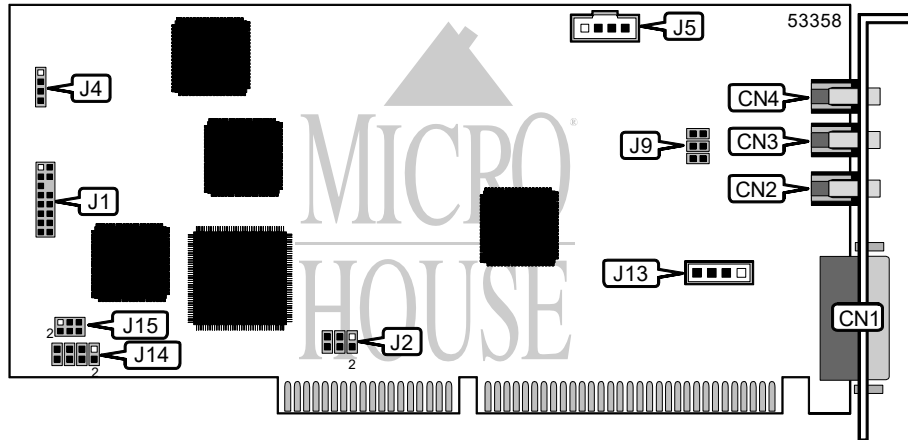

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	LMSI connector	J1
Microphone in	CN2	PC speaker connector	J4
Stereo line out	CN3	Audio in - CD-ROM	J5
Stereo line in	CN4	Aux. Audio in - CD-ROM	J13

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J9	Unidentified

CD-ROM I/O ADDRESS SELECTION	
Setting	J15
300	Pins 3 & 5, 4 & 6 closed
310	Pins 3 & 5, 2 & 4 closed
330	Pins 1 & 3, 4 & 6 closed
í 340	Pins 1 & 3, 2 & 4 closed

BOARD ID SELECTION			
Setting	J2/pins 1 & 2	J2/pins 3 & 4	J2/pins 5 & 6
í 0	Open	Open	Open
1	Closed	Open	Open
2	Open	Closed	Open
3	Closed	Closed	Open
4	Open	Open	Closed

Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings.

Continued on next page . . .

MEDIA VISION TECHNOLOGY, INC.
FUSION CD16 S/E LMSI (650-0042-01)

. . . continued from previous page

CD-ROM INTERRUPT SELECTION				
Setting	J14/pins 1 & 2	J14/pins 3 & 4	J14/pins 5 & 6	J14/pins 7 & 8
í IRQ3	Closed	Open	Open	Open
IRQ4	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open
IRQ6	Open	Open	Open	Closed