


# CREATIVE LABS SOUNDBLASTER 16 MULTICD

Card Type  
Chip Set  
I/O Options

Sound card  
Creative Labs  
CD-ROM interface (3), Game/MIDI port, wavetable, line in, line out,  
microphone in, speaker/line out, Audio in-CD-ROM, PC speaker  
connector

Data Bus  
Card Size

16-bit ISA  
Three-quarter length, full-height card

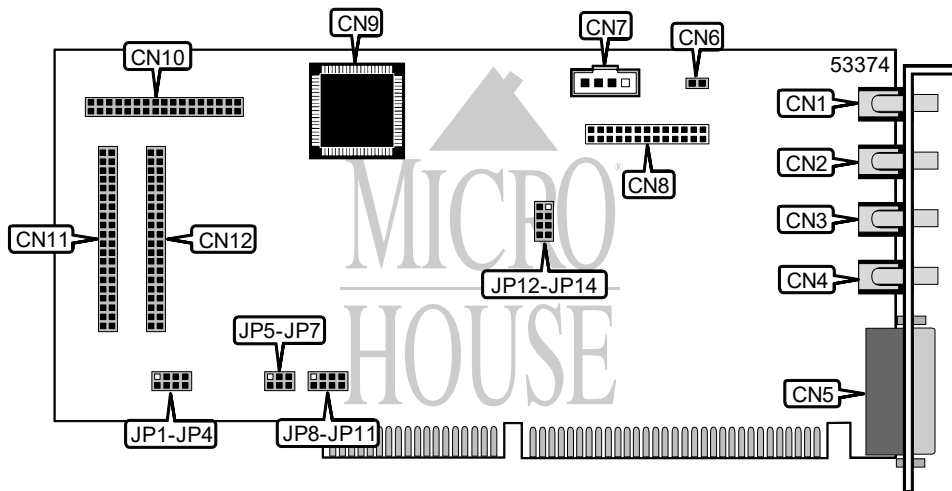

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Audio in CD-ROM (unidentified)	CN7
Microphone jack	CN2	Wave Blaster connector	CN8
Line out	CN3	Advanced signal processor socket	CN9
Speaker/Line out	CN4	CD-ROM interface (Sony)	CN10
Game/MIDI port	CN5	CD-ROM interface (Creative)	CN11
PC Speaker connector	CN6	CD-ROM interface (Mitsumi)	CN12

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
MPU 401 Port enabled	JP8	Closed	
MPU 401 Port disabled	JP8	Open	
Factory configured - do not alter	J12	Unidentified	
Factory configured - do not alter	J13	Unidentified	
Game/MIDI port enabled	JP14	Closed	
Game/MIDI port disabled	JP14	Open	

IDE INTERFACE SELECT				
Function	JP1	JP2	JP3	JP4
IDE interface (Creative) enabled	Closed	Open	Open	Open
IDE interface (Sony) enabled	Open	Closed	Open	Open
IDE interface (Mitsumi) enabled	Open	Open	Closed	Open
Disable all IDE interfaces	Open	Open	Open	Closed

Continued on next page . . .

# CREATIVE LABS SOUNDBLASTER 16 MULTICD

. . . continued from previous page

CD-ROM IRQ SELECT			
Address	JP5	JP6	JP7
IRQ 3	Open	Open	Closed
IRQ 10	Open	Closed	Open
IRQ 11	Closed	Open	Open
Disabled	Open	Open	Open

BASE I/O ADDRESS OF MPU-401 UART PORT	
Base I/O Address	JP9
330h	Closed
300h	Open

BASE I/O ADDRESS OF AUDIO INTERFACE		
Base I/O Address	JP10	JP11
220h	Closed	Closed
240h	Open	Closed
260h	Closed	Open
280h	Open	Open