


BEK-TRONIC TECHNOLOGY, INC.

BEK-2601

Processor	80286
Processor Speed	16MHz
Chip Set	Headland
Max. Onboard DRAM	4MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80287

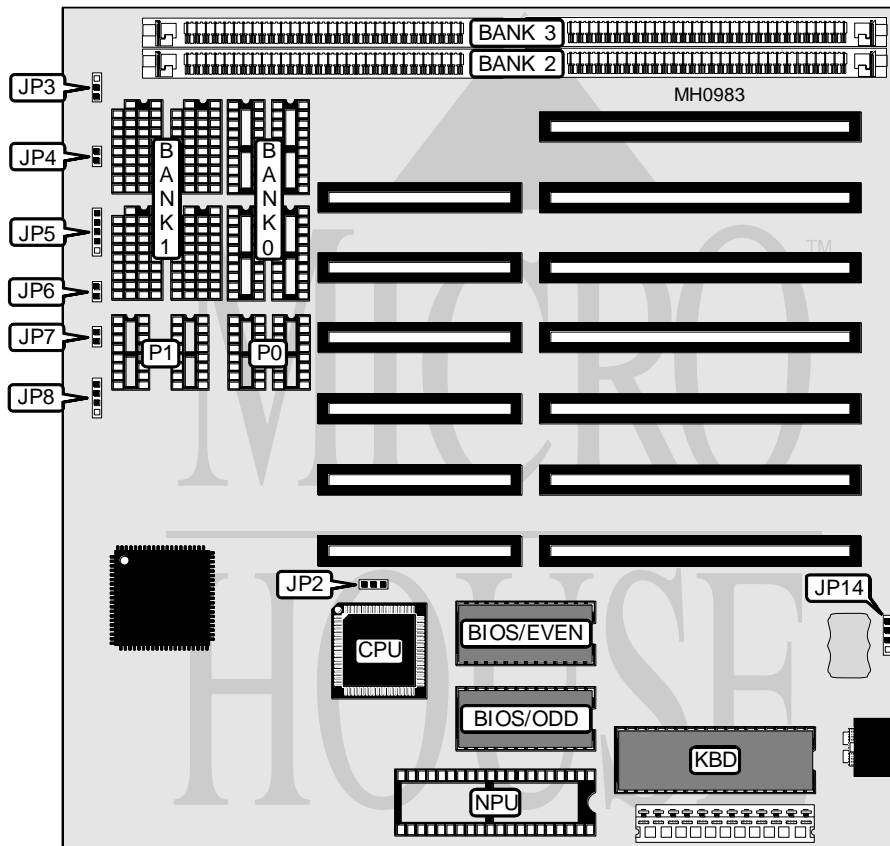

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	JP4	Reset switch	JP7
Power LED & keylock	JP5	Speaker	JP8
Turbo LED	JP6	External battery	JP14

Continued on next page . . .

BEK-TRONIC TECHNOLOGY, INC.**BEK - 2601**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU mode select synchronous with CPU	JP2	pins 1 & 2 closed
NPU mode select synchronous with oscillator installed at Y1	JP2	pins 2 & 3 closed
í Monitor type select color	JP3	pins 2 & 3 closed
Monitor type select monochrome	JP3	pins 1 & 2 closed

DRAM CONFIGURATION						
Size	Bank 0	P-0	Bank 1	P-1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(4) 256K x 9	NONE
640KB	(4) 44256	(2) 41256	(4) 4464	(2) 4164	NONE	NONE
640KB	NONE	NONE	(4) 4464	(2) 4164	(4) 256K x 9	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(4) 256K x 9	(4) 256K x 9
1MB	(4) 44256	(2) 41256	NONE	NONE	NONE	(4) 256K x 9
1MB	NONE	NONE	(4) 44256	(2) 41256	(4) 256K x 9	NONE
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9