


CREATIVE LABS, INC. SOUNDBLASTER 32 (CT3930)

Card Type Sound card
Chip Set Creative Technology
Maximum Onboard Memory Unidentified
I/O Options CD-ROM interface, microphone connector, line in connector, line out connector, peaker out connector, game/MIDI port, PC internal speaker, CD-ROM audio in connectors (2)
Data Bus 16-bit ISA

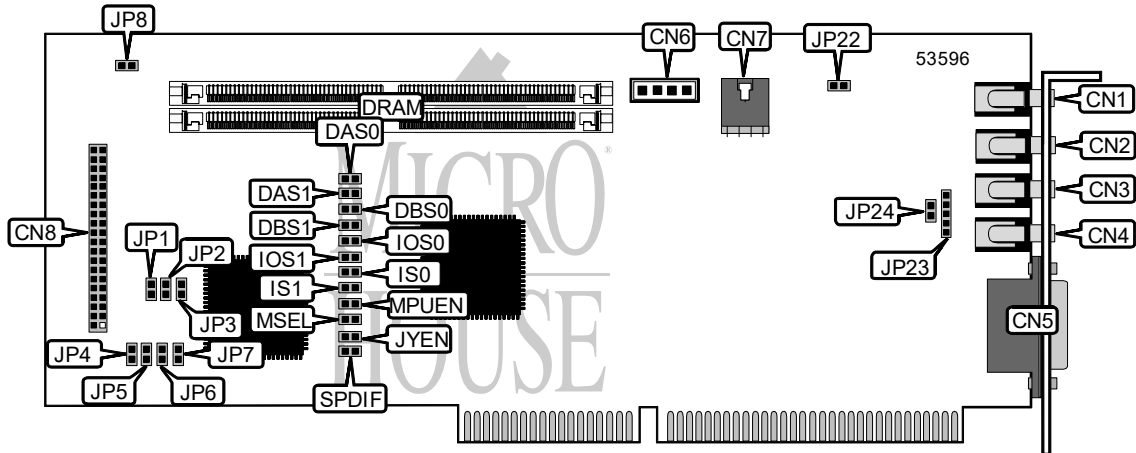

| CONNECTIONS | | | |
|-----------------------|-------|---------------------------|-------|
| Function | Label | Function | Label |
| Line in connector | CN1 | CD-ROM audio in connector | CN6 |
| Microphone connector | CN2 | CD-ROM audio in connector | CN7 |
| Line out connector | CN3 | CD-ROM interface | CN8 |
| Speaker out connector | CN4 | PC internal speaker | JP22 |
| Game/MIDI port | CN5 | | |

| USER CONFIGURABLE SETTINGS | | | |
|-------------------------------------|--------|--------------|--|
| Function | Label | Position | |
| í Factory configured – do not alter | JP1 | Unidentified | |
| í MP-401 enabled | JP8 | Closed | |
| MP-401 disabled | JP8 | Open | |
| í Factory configured – do not alter | JP23 | Unidentified | |
| í Factory configured – do not alter | JP24 | Unidentified | |
| í Joystick enabled | JYEN | Closed | |
| Joystick disabled | JYEN | Open | |
| í Factory configured – do not alter | MPUEEN | Unidentified | |
| í MP-401 I/O address select 330 | MSEL | Closed | |
| MP-401 I/O address select 300 | MSEL | Open | |
| í Factory configured – do not alter | SPDIF | Unidentified | |

Continued on next page. . .

CREATIVE LABS, INC.
SOUNDBLASTER 32 (CT3930)

... continued from previous page

DRAM CONFIGURATION

Note: The maximum amount of onboard memory is unidentified.

8-BIT DMA CHANNEL SELECTION

| Channel | DAS0 | DAS1 |
|---------|--------|--------|
| 0 | Closed | Closed |
| 1 | Open | Closed |
| 3 | Closed | Open |

16-BIT DMA CHANNEL SELECTION

| Channel | DBS0 | DBS2 |
|---------|--------|--------|
| 5 | Closed | Closed |
| 6 | Open | Closed |
| 7 | Closed | Open |

INTERRUPT SELECTION

| IRQ | IS0 | IS1 |
|-----|--------|--------|
| 2 | Closed | Closed |
| 5 | Open | Closed |
| 7 | Closed | Open |
| 10 | Open | Open |

IDE PORT SELECTION

| Port | JP2 | JP3 |
|------------|--------|--------|
| Secondary | Closed | Open |
| Tertiary | Open | Closed |
| Quaternary | Open | Open |
| Disabled | Closed | Closed |

IDE INTERRUPT SELECTION

| IRQ | JP4 | JP5 | JP6 | JP7 |
|-----|--------|--------|--------|--------|
| 10 | Closed | Open | Open | Open |
| 11 | Open | Closed | Open | Open |
| 12 | Open | Open | Closed | Open |
| 15 | Open | Open | Open | Closed |

AUDIO I/O ADDRESS SELECTION

| Address | IOS0 | IOS1 |
|---------|--------|--------|
| 220 | Closed | Closed |
| 240 | Open | Closed |
| 260 | Closed | Open |
| 280 | Open | Open |