


# JOINDATA SYSTEMS, INC.

## G 3 8 6 E

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	ETEQ
<b>Max. Onboard DRAM</b>	64MB
<b>Cache</b>	32/64/128/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387/3167

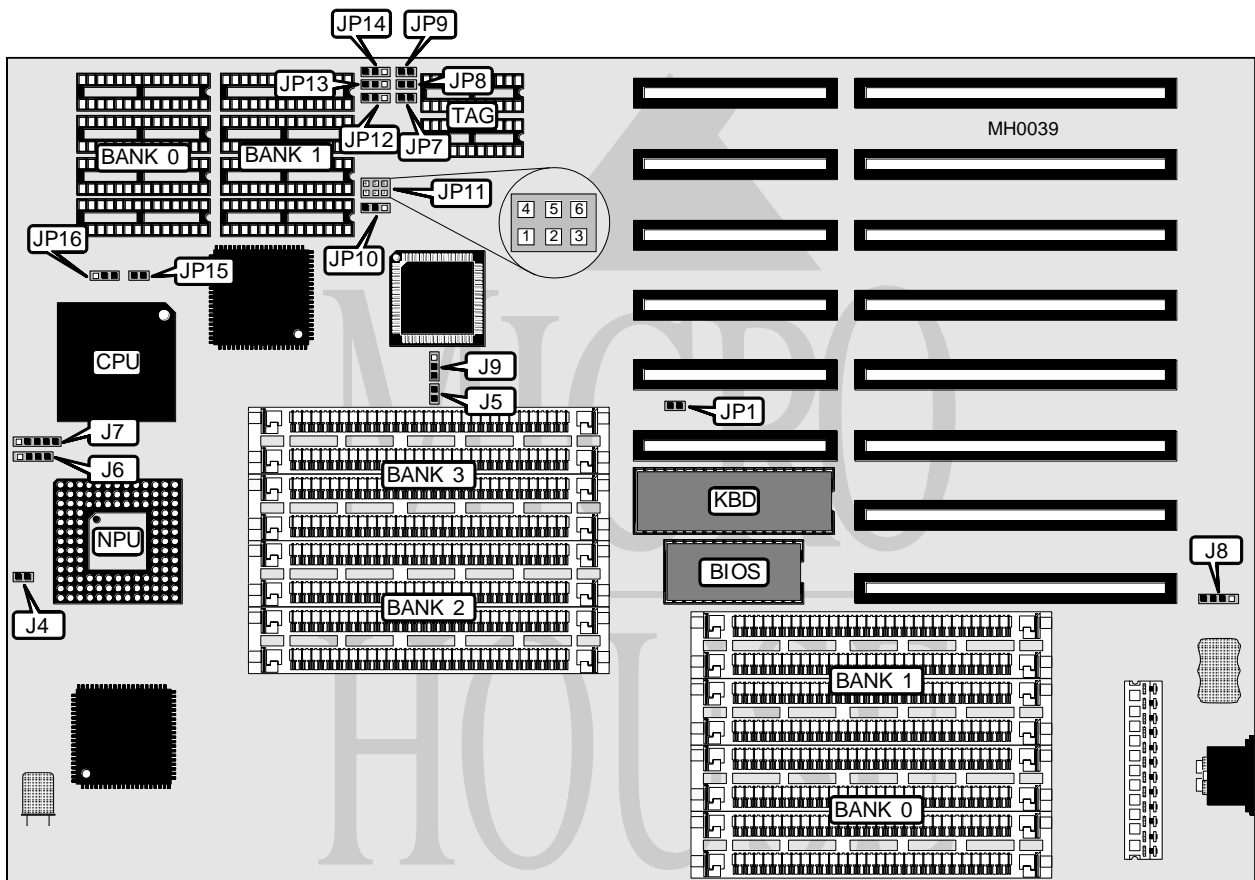

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J4	Speaker	J6
Turbo switch	J9	Power LED & keylock	J7
Turbo LED	J5	External battery	J8

Continued on next page . . .

## JOINDATA SYSTEMS, INC.

## G 3 8 6 E

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open

## DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
6MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
17MB	(4) 4M x 9	(4) 256K x 9	NONE	NONE
20MB	(4) 4M x 9	(4) 1M x 9	NONE	NONE
24MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	NONE
40MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	(4) 4M x 9
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

## CACHE CONFIGURATION

Size	Bank 0	Bank 1	TAG
32KB	(4) 4K x 8	NONE	(2) 16K x 4
64KB	(4) 4K x 8	(4) 4K x 8	(2) 16K x 4
128KB	(4) 32K x 8	NONE	(2) 16K x 4
256KB	(4) 32K x 8	(4) 32K x 8	(2) 16K x 4

## CACHE JUMPER CONFIGURATION

Size	JP7	JP8	JP9	JP10	JP11
32KB	Open	Open	Open	1 & 2	2 & 3
64KB	Open	Open	Closed	1 & 2	1 & 2
128KB	Closed	Closed	Closed	2 & 3	4 & 5
256KB	Closed	Closed	Closed	2 & 3	5 & 6

Note: Pins designated should be in the closed position.

## CACHE JUMPER CONFIGURATION (CON'T)

Size	JP12	JP13	JP14	JP15	JP16
32KB	2 & 3	1 & 2	2 & 3	Closed	1 & 2
64KB	2 & 3	1 & 2	2 & 3	Closed	2 & 3
128KB	1 & 2	1 & 2	2 & 3	Open	2 & 3
256KB	2 & 3	2 & 3	1 & 2	Open	2 & 3

Note: Pins designated should be in the closed position.