


# HORNET TECHNOLOGY CORPORATION

## AUTI 486

<b>Processor</b>	80486SX/80486DX
<b>Processor Speed</b>	20/33MHz
<b>Chip Set</b>	TI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 219mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	4167

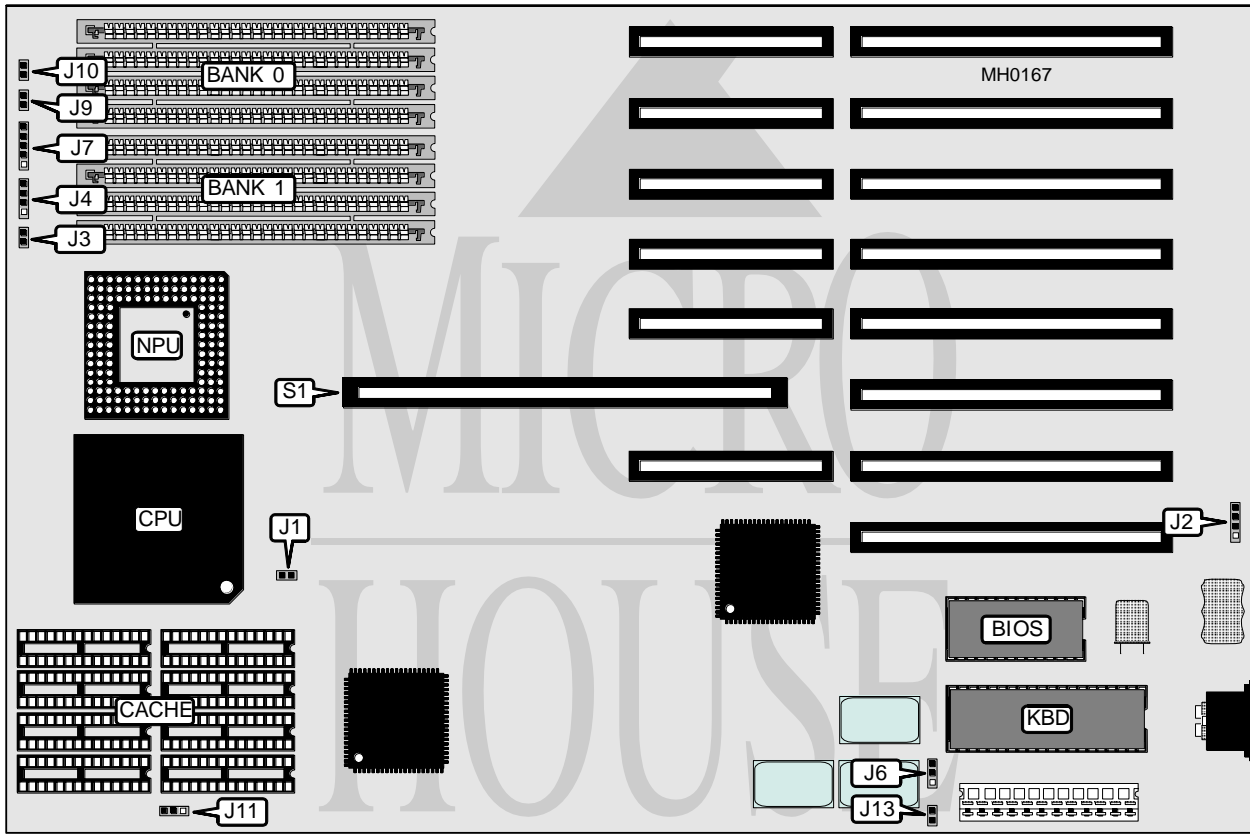

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	J9
Reset switch	J3	Turbo LED	J10
Speaker	J4	32-bit external memory card	S1
Power LED & keylock	J7		

Continued on next page . . .

# HORNET TECHNOLOGY CORPORATION

## AUTI 486

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU enabled	J1	Closed
NPU disabled	J1	Open
í Monitor type select color	J6	pins 1 & 2 closed
Monitor type select monochrome	J6	pins 2 & 3 closed
í CACHE size select 64KB	J11	pins 1 & 2 closed
CACHE size select 256KB	J11	pins 2 & 3 closed
í POST enabled	J13	Closed
POST disabled	J13	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9