


ANIX TECHNOLOGY CORPORATION

128KB CACHE 486 25MHZ

Processor	80486SX
Processor Speed	25MHz
Chip Set	OPTI
Max. Onboard DRAM	16MB
SRAM Cache	128KB (Factory configured)
BIOS	AMI
Dimensions	355.6mm x 304mm
I/O Options	None
NPU Options	4167

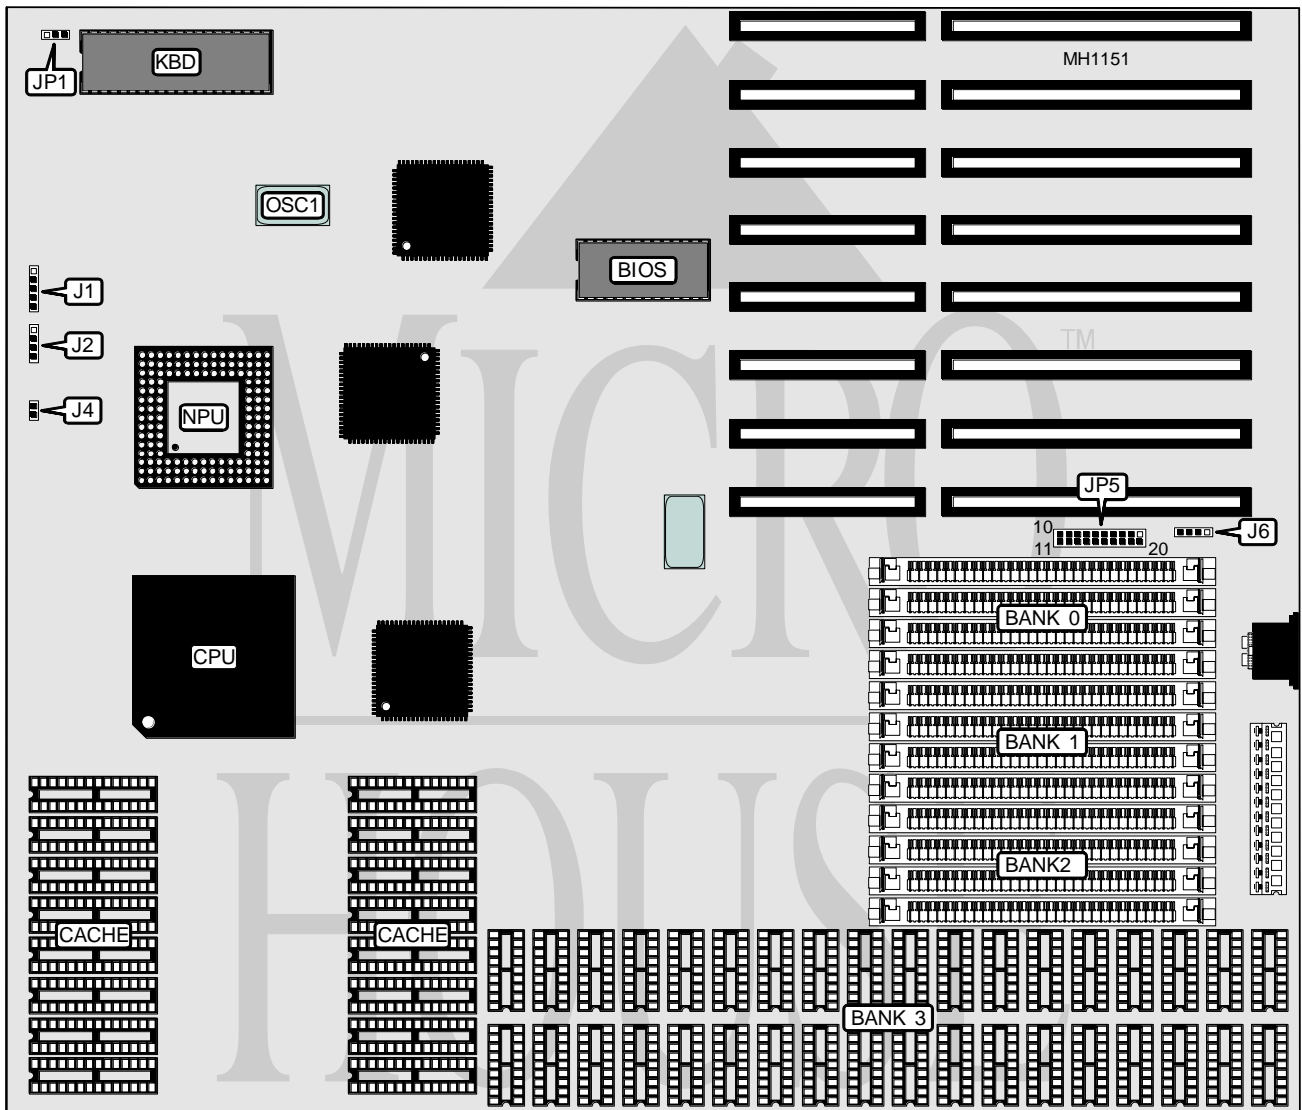

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Reset switch	J4
Speaker	J2	External battery	J6

Continued on next page . . .

ANIX TECHNOLOGY CORPORATION

128KB CACHE 486 25MHZ

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select monochrome	JP1	pins 2 & 3 closed
Monitor type select color	JP1	pins 1 & 2 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB ¹	(4) 256K x 9	NONE	NONE	NONE
2MB ¹	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB ¹	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB ¹	(4) 1M x 9	NONE	NONE	NONE
4MB ²	NONE	NONE	NONE	(36) 411000
5MB ¹	(4) 256K x 9	(4) 1M x 9	NONE	NONE
5MB ¹	(4) 1M x 9	(4) 256K x 9	NONE	NONE
6MB ¹	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	NONE
6MB ¹	(4) 256K x 9	(4) 1M x 9	(4) 256K x 9	NONE
6MB ¹	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9	NONE
7MB ²	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(36) 411000
8MB ¹	(4) 1M x 9	(4) 1M x 9	NONE	NONE
9MB ¹	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	NONE
9MB ¹	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	NONE
9MB ¹	(4) 1M x 9	(4) 256K x 9	(4) 1M x 9	NONE
10MB ¹	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(36) 411000
10MB ²	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9	(36) 411000
10MB ²	(4) 256K x 9	(4) 1M x 9	(4) 256K x 9	(36) 411000
12MB ¹	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
13MB ¹	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	(36) 411000
13MB ²	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	(36) 411000
13MB ¹	(4) 1M x 9	(4) 256K x 9	(4) 1M x 9	(36) 411000
16MB ¹	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(36) 411000
16MB ²	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(36) 411000

Note¹: Set JP12 pins 1 & 2, 3 & 4, 5 & 6, 7 & 8, 9 & 10, 11 & 12, 13 & 14, 15 & 16 etc., closed.

Note²: Set JP12 pins 1 & 20, 2 & 19, 3 & 18, 4 & 17, 5 & 16, 6 & 15, 7 & 14, 8 & 13 etc., closed.