


# HORNET TECHNOLOGY CORPORATION

## AMTI 486SX20/DX33

<b>Processor</b>	80486SX/80487SX/80486DX
<b>Processor Speed</b>	20/33MHz
<b>Chip Set</b>	TI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	4167

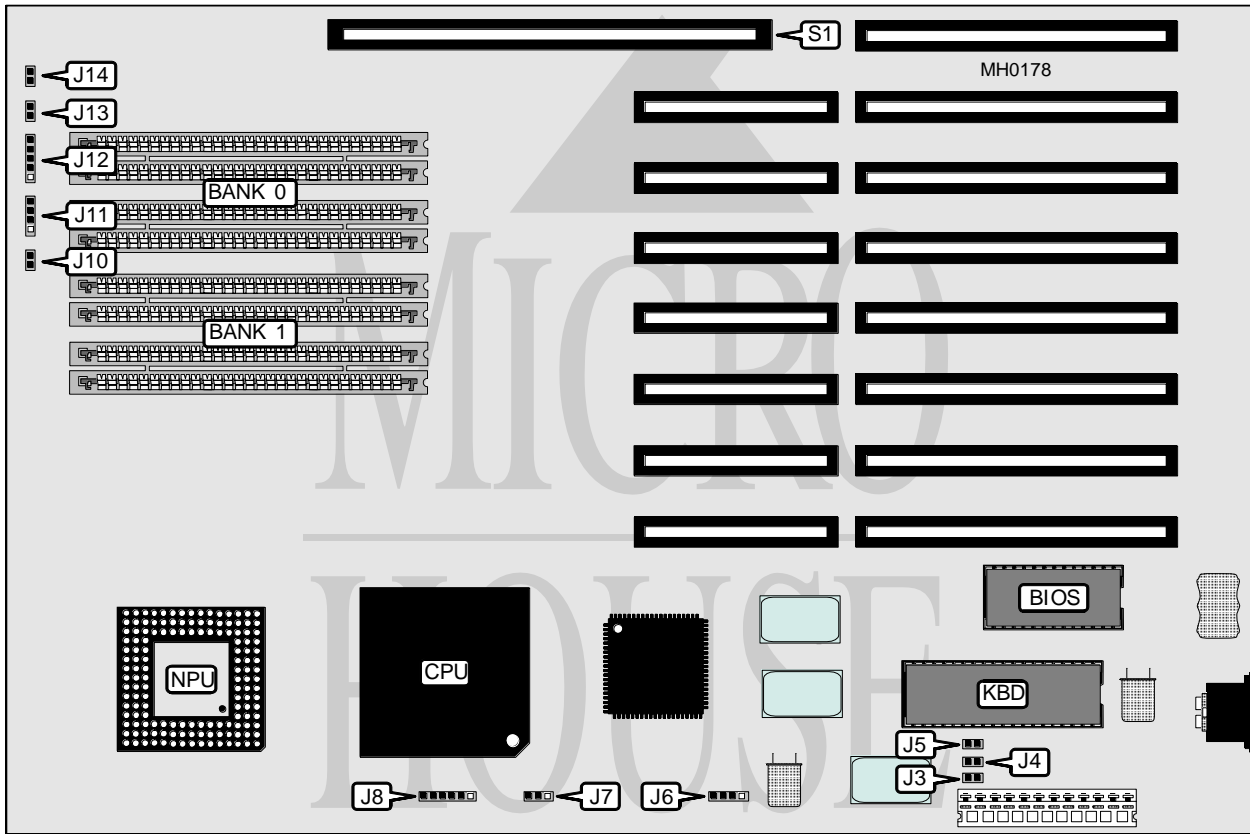

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J6	Turbo switch	J13
Reset switch	J10	Turbo LED	J14
Speaker	J11	32-bit external memory card	S1
Power LED & keylock	J12		

Continued on next page . . .

# HORNET TECHNOLOGY CORPORATION

## AMTI 486SX20/DX33

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open
í POST enabled	J4	Closed
POST disabled	J4	Open
í Factory configured - do not alter	J5	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE CONFIGURATION		
Type	J7	J8
80486SX	pins 1 & 2 closed	pins 3 & 4 closed
80487SX	pins 2 & 3 closed	pins 3 & 4, 5 & 6 closed
80486DX	pins 2 & 3 closed	pins 1 & 2, 5 & 6 closed