


# UNIDENTIFIED 286 HT

<b>Processor</b>	80286
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	Headland
<b>Max. Onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	Award
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

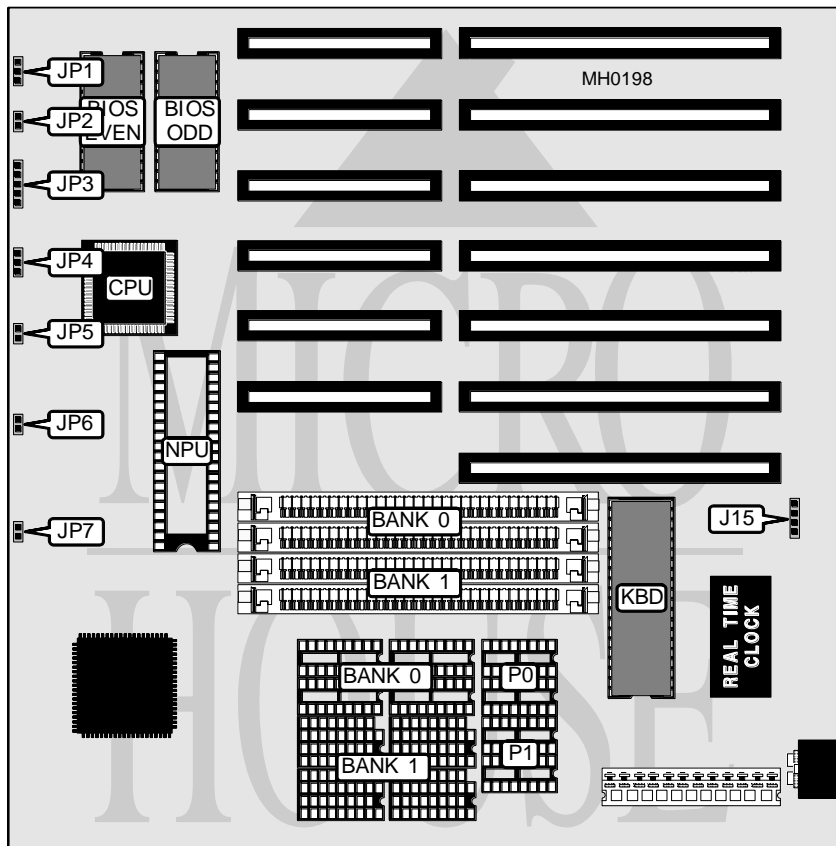

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J15	Turbo LED	JP5
Turbo switch	JP2	Speaker	JP6
Power LED & keylock	JP3	Reset switch	JP7

Continued on next page . . .

## UNIDENTIFIED

## 286 HT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í BIOS type select 27256	JP1	pins 1 & 2 closed
BIOS type select 27128	JP1	pins 2 & 3 closed
í Monitor type select monochrome	JP4	pins 1 & 2 closed
Monitor type select color	JP4	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0	P-0	Bank 1	P-1	Bank 0	Bank 1
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
640KB	(4) 44256	(2) 41256	(4) 4464	(2) 4164	NONE	NONE
640KB	NONE	NONE	(4) 4464	(2) 4164	(2) 256K x 9	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
1MB	(4) 44256	(2) 41256	NONE	NONE	NONE	(2) 256K x 9
1MB	NONE	NONE	(4) 44256	(2) 41256	(2) 256K x 9	NONE
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9