


JOINDATA SYSTEMS, INC.

G 3 8 6 K S

Processor	80386DX
Processor Speed	33/40MHz
Chip Set	C & T
Max. Onboard DRAM	32MB
SRAM Cache	64/128/256KB
BIOS	AMI
Dimensions	330mm x 215mm
I/O Options	None
NPU Options	80387/3167

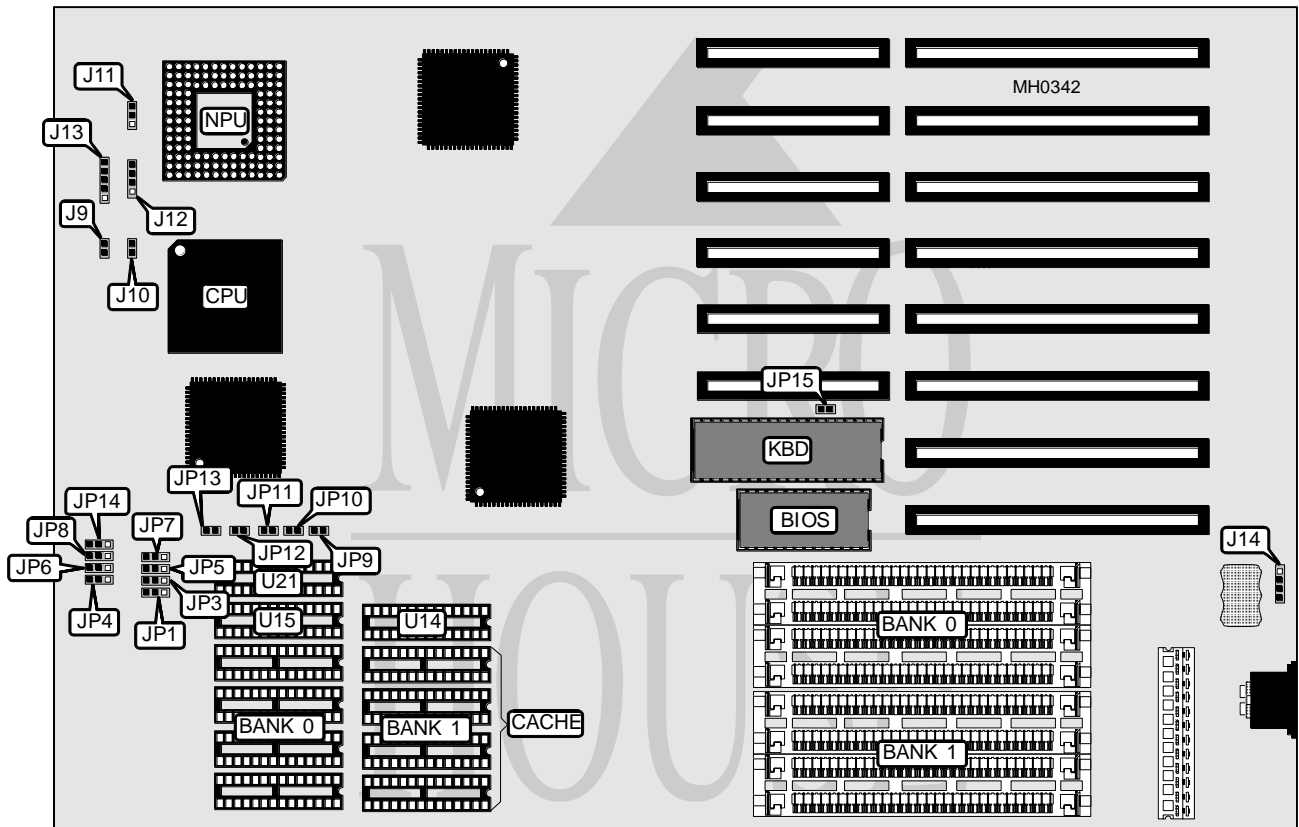

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J9	Speaker	J12
Turbo LED	J10	Power LED & keylock	J13
Turbo switch	J11	External battery	J14

Continued on next page . . .

JOINDATA SYSTEMS, INC.
G 3 8 6 K S

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP15	Closed
Monitor type select monochrome	JP15	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION					
Size	Bank 0	Bank 1	U14 (TAG)	U15 (TAG)	U21 (TAG)
64KB	(4) 8K x 8	(4) 8K x 8	NONE	(1) 16K x 4	(1) 16K x 4
128KB	(4) 32K x 8	NONE	(1) 32K x 8	NONE	NONE
256KB	(4) 32K x 8	(4) 32K x 8	NONE	(1) 64K x 4	(1) 64K x 4

CACHE JUMPER CONFIGURATION						
Size	JP1	JP3	JP4	JP5	JP6	JP7
64KB	1 & 2	1 & 2	2 & 3	open	1 & 2	2 & 3
128KB	2 & 3	1 & 2	1 & 2	open	2 & 3	1 & 2
256KB	2 & 3	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2

Note: Pins designated should be in the closed position.

CACHE JUMPER CONFIGURATION (CON'T)							
Size	JP8	JP9	JP10	JP11	JP12	JP13	JP14
64KB	1 & 2	open	closed	closed	open	closed	1 & 2
128KB	2 & 3	open	open	closed	open	open	open
256KB	1 & 2	closed	open	open	closed	open	2 & 3

Note: Pins designated should be in the closed position.