


# SHUTTLE COMPUTER INTERNATIONAL, INC.

## HOT - 403

<b>Processor</b>	80486DX
<b>Processor Speed</b>	33/40/50MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	4167

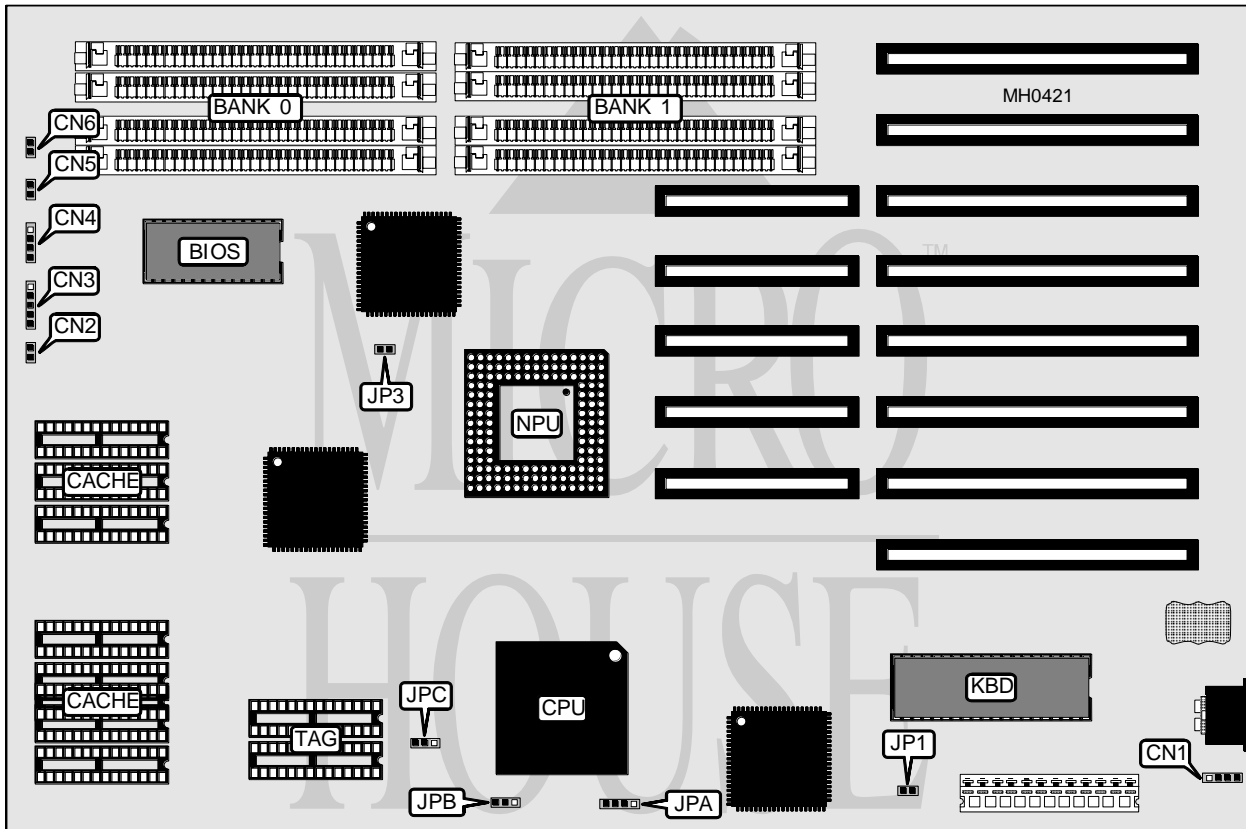

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CN1	Speaker	CN4
Turbo LED	CN2	Turbo switch	CN5
Power LED & keylock	CN3	Reset switch	CN6

Continued on next page . . .

# SHUTTLE COMPUTER INTERNATIONAL, INC.

## HOT - 403

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery select internal	CN1	pins 2 & 3 closed
Battery select external	CN1	Closed
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í Bus speed select ATCLK/6	JP3	Closed
Bus speed select ATCLK/4	JP3	Open
í Factory configured - do not alter	JPA	N/A
í Factory configured - do not alter	JPB	N/A
í Factory configured - do not alter	JPC	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 8K x 8	(2) 8K x 8
256KB	(8) 32K x 8	(2) 32K x 8