


# UNIDENTIFIED

## B 3 2 0 / 1

<b>Processor</b>	80386DX
<b>Processor Speed</b>	20/25MHz
<b>Chip Set</b>	ACC
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387

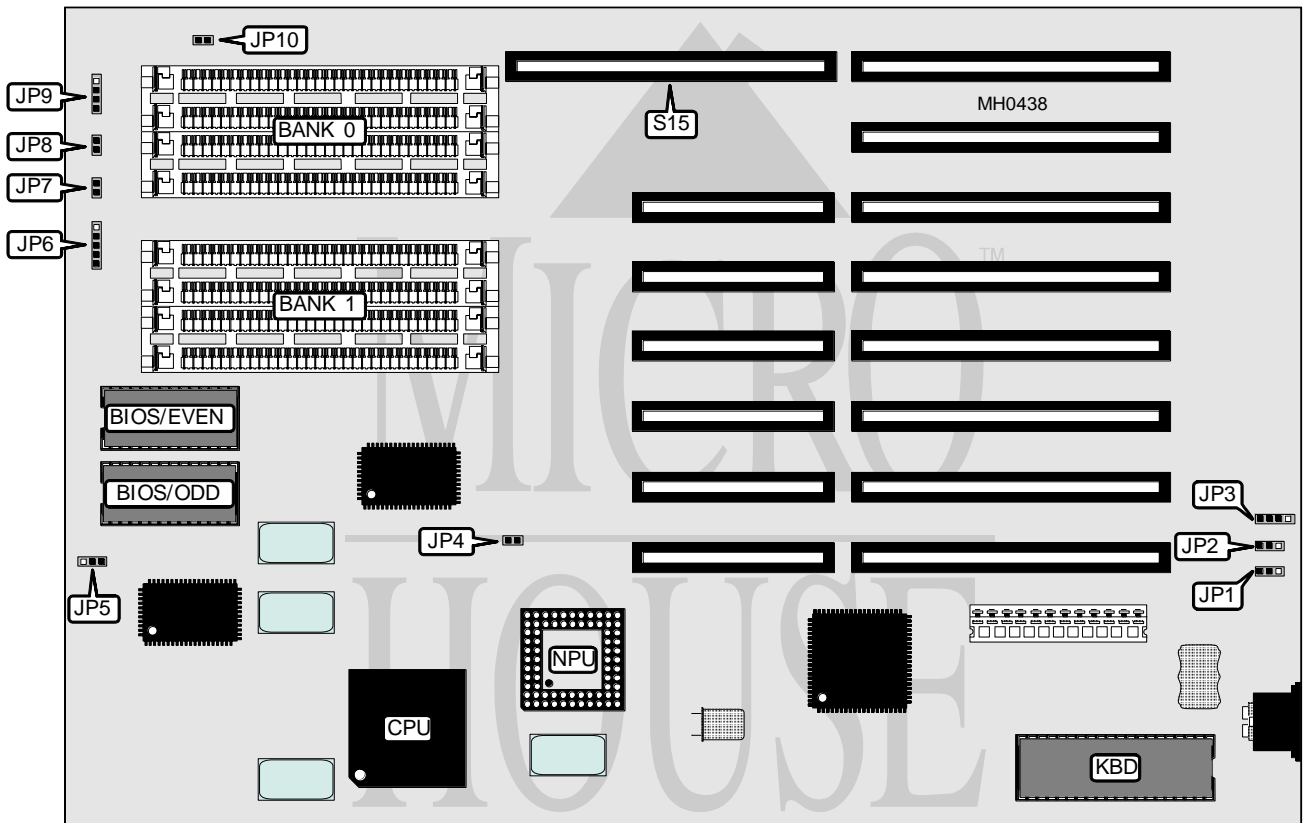

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP3	Speaker	JP9
Power LED & keylock	JP6	Turbo switch	JP10
Reset switch	JP7	32-bit external memory card	S15
Turbo LED	JP8		

Continued on next page . . .

## UNIDENTIFIED

B320/1

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	JP1	pins 1 & 2 closed
Battery type select external	JP1	pins 2 & 3 closed
í Monitor type select color	JP2	pins 1 & 2 closed
Monitor type select monochrome	JP2	pins 2 & 3 closed
í NPU disabled	JP4	pins 1 & 2 closed
NPU enabled	JP4	pins 3 & 4 closed
í SIMM module type select 256K x 9	JP5	pins 1 & 2 closed
SIMM module type select 1M x 9	JP5	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9