


IBM CORPORATION PC/AT MODEL 5170 (Type 2/3)

Processor	80286
Processor Speed	6MHz (Type 2), 8MHz (Type 3)
Chip Set	None
Max. Onboard DRAM	512KB
Cache	None
BIOS	IBM
Dimensions	13.8" x 9.4"
I/O Options	None
NPU Options	80287

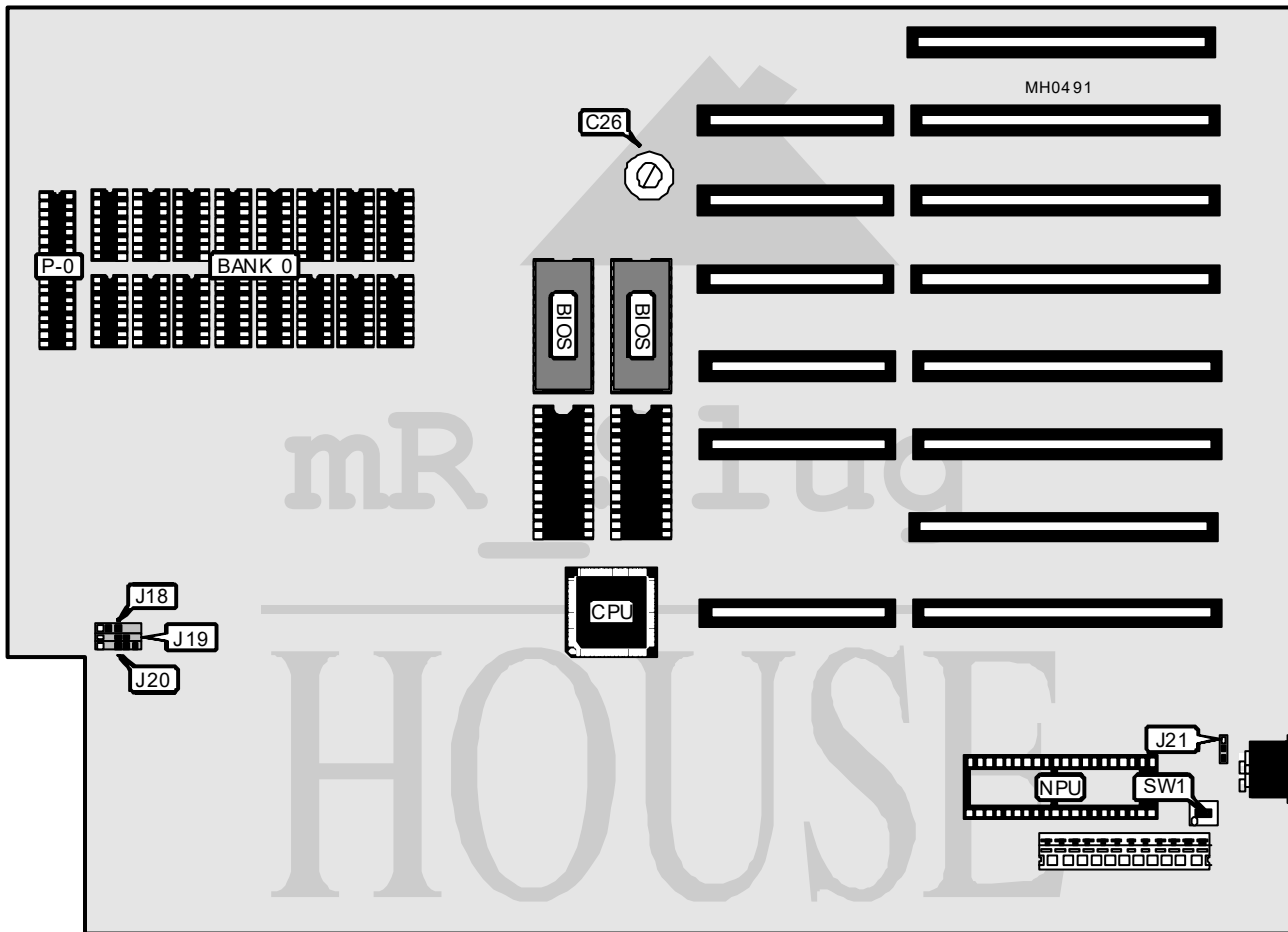

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J19	External battery	J21
Power LED & keylock	J20		

Continued on next page . . .

IBM CORPORATION

PC/AT MODEL 5170 (Type 2/3)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í 14/16MHz adjust	C26	N/A
í Monitor type select color	SW1	On
í Monitor type select monochrome	SW1	Off
Note: Variable resistor C26 should not be altered except by competently trained technicians.		

DRAM CONFIGURATION			
Size	Bank 0	P-0	Note:
256KB	(16) 256K	(2) 256K	512KB must be installed, 256KB is achived by disabling half the RAM
512KB	(16) 256K	(2) 256K	

DRAM JUMPER CONFIGURATION	
Size	J18
256KB	pins 1 & 2 closed
512KB	pins 2 & 3 closed