


PACKARD BELL

PB386-16 SUPREME/PB386-20 SUPREME (VER. 2)

Processor	80386DX
Processor Speed	16/20MHz
Chip Set	C & T
Max. Onboard DRAM	16MB
SRAM Cache	None
BIOS	Award
Dimensions	355mm x 305mm
I/O Options	None
NPU Options	80287/80387DX

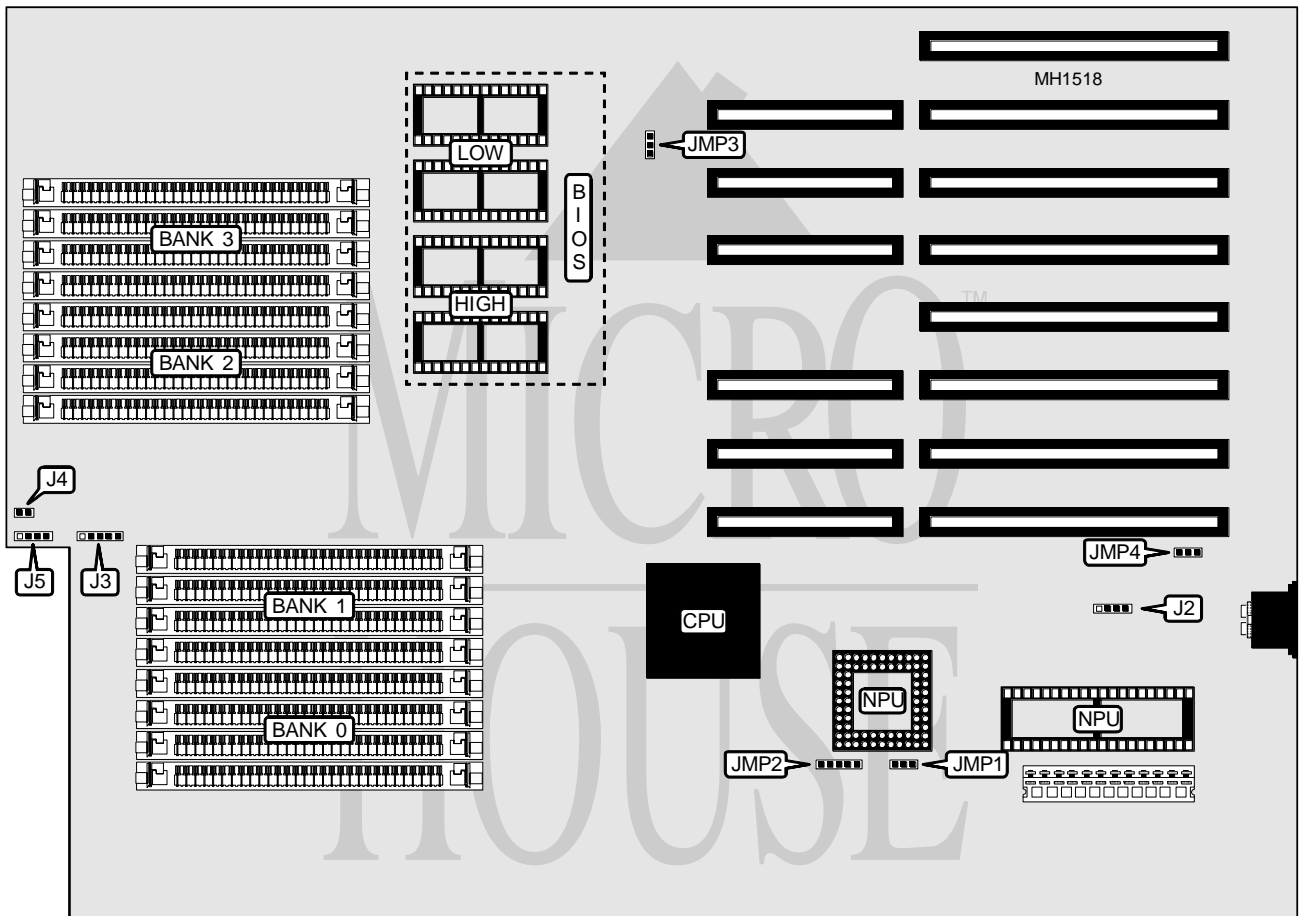

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Reset	J4
Power LED & keylock	J3	Speaker	J5

Continued on next page . . .

PACKARD BELL

PB386-16 SUPREME/PB386-20 SUPREME (VER. 2)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JMP1	pins 1 & 2 closed
Monitor type select monochrome	JMP1	pins 2 & 3 closed
í BIOS type select 27256	JMP3	pins 1 & 2 closed
BIOS type select 27512	JMP3	pins 2 & 3 closed
í System speed select 16MHz	JMP4	pins 1 & 2 closed
System speed select 20MHz	JMP4	pins 2 & 3 closed

NPU CONFIGURATION			
NPU	JMP2/pins 1 & 2	JMP2/pins 3 & 4	JMP2/pins 5 & 6
í None	Open	Closed	Open
80287	Open	Open	Closed
80387	Closed	Open	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9