


EVEREX SYSTEMS, INC.

3000 K/L

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	C & T
Max. onboard DRAM	8MB
Cache	64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card
NPU Options	80386DX

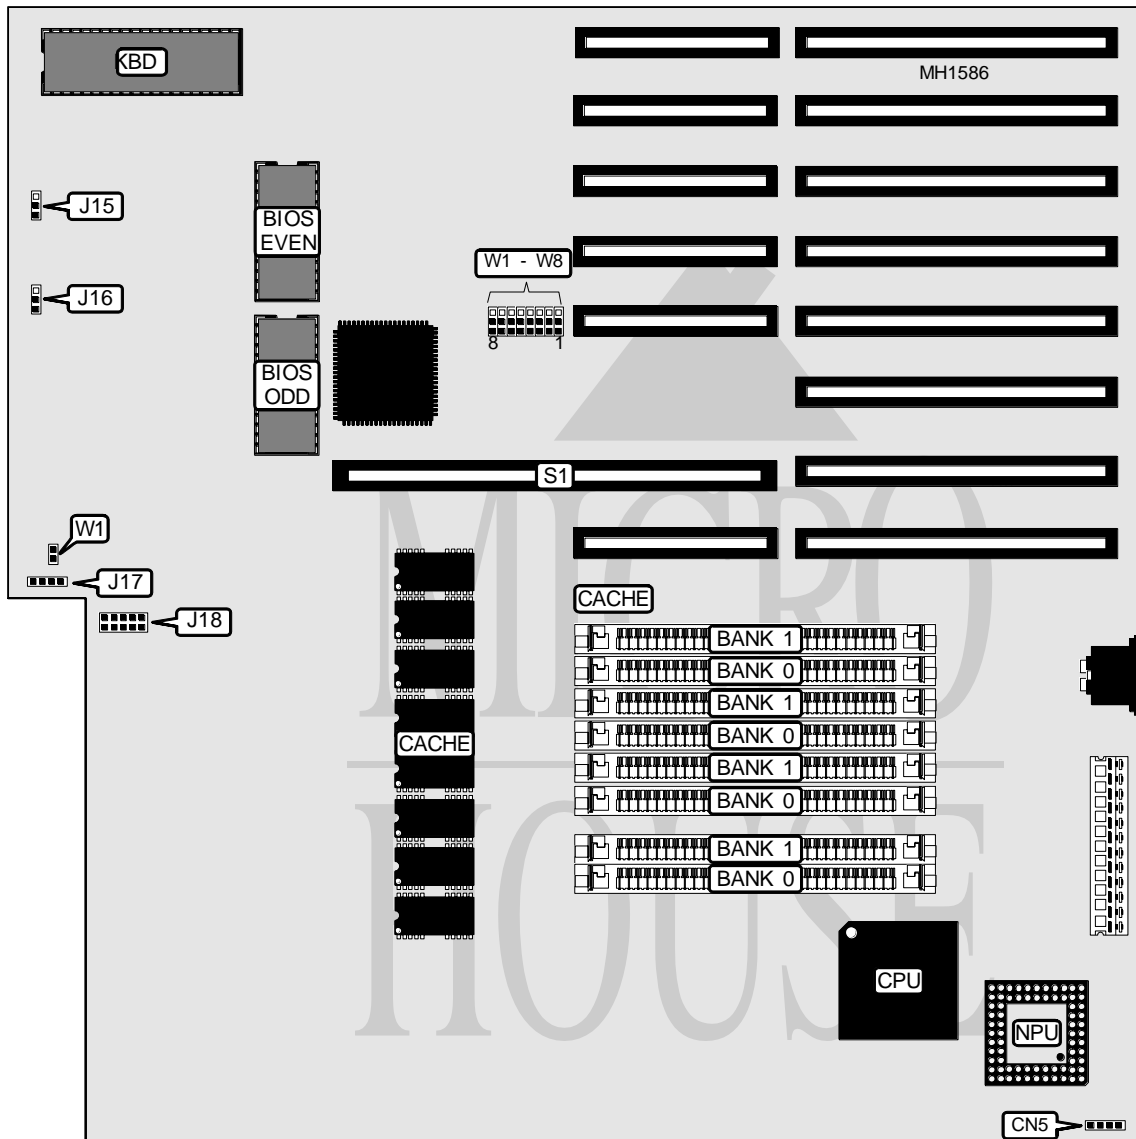

Continued on next page . . .

EVEREX SYSTEMS, INC.

3000 K/L

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CN5	Front Panel connector	J18
Speaker	J17	32-bit external memory card	S1

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J15	pins 2 & 3 closed
í Factory configured - do not alter	J16	pins 2 & 3 closed
í Factory configured - do not alter	W1 - W8	pins 2 & 3 closed
í Factory configured - do not alter	W1	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE