


UNIDENTIFIED

SL-386/S

Processor	80386DX
Processor Speed	33MHz
Chip Set	SIS
Max. Onboard DRAM	16MB
Cache	32/64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387/3167

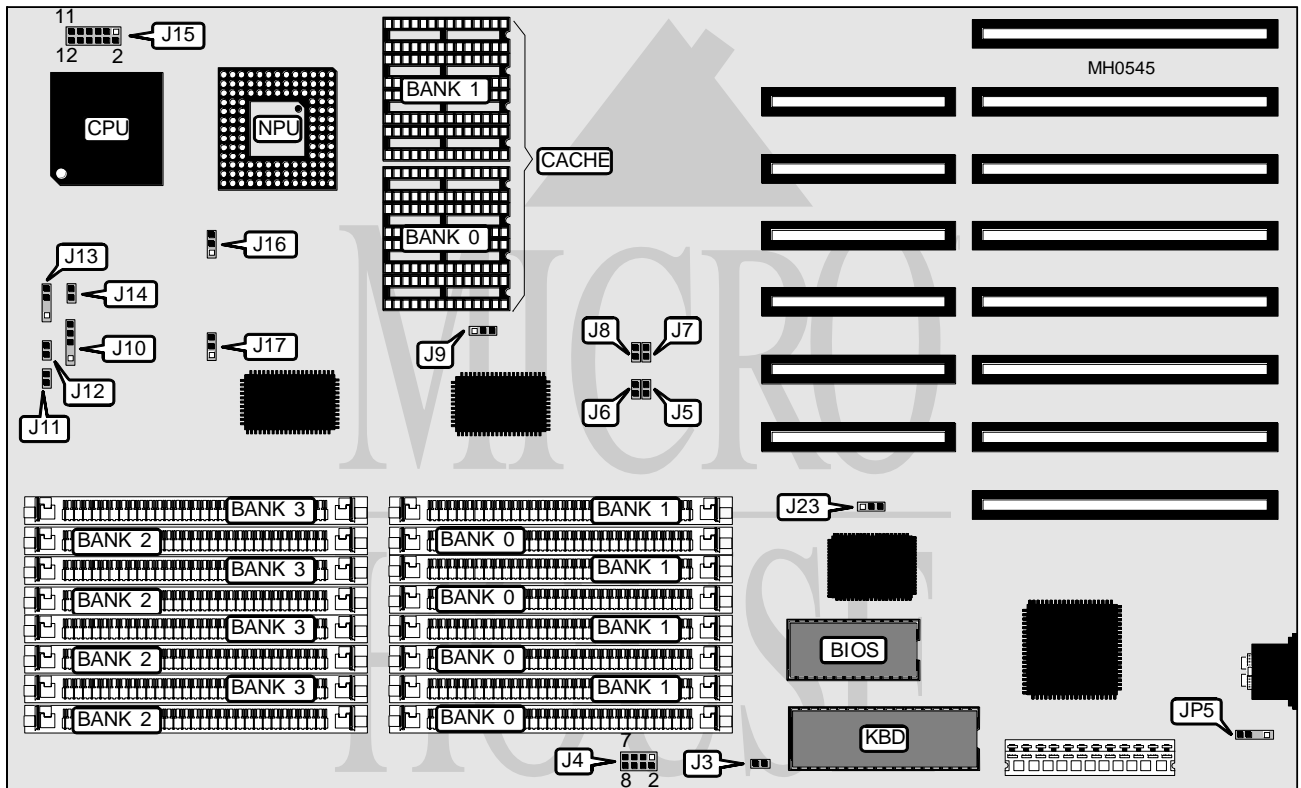

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J10	Reset switch	J14
Turbo LED	J11	External battery	JP5
Turbo switch	J12	Speaker	J13

Continued on next page . . .

UNIDENTIFIED

SL-386/S

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J3	Open
Monitor type select color	J3	Closed
í Factory configured - do not alter	J4	N/A
í Factory configured - do not alter	J15	N/A
í Factory configured - do not alter	J16	N/A
í Factory configured - do not alter	J17	N/A
í Factory configured - do not alter	J23	N/A

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
32KB	(4) 8K x 8	NONE
64KB	(4) 8K x 8	(4) 8K x 8

CACHE JUMPER CONFIGURATION	
Size	J9
32KB	pins 1 & 2 closed
64KB	pins 2 & 3 closed

CACHE JUMPER CONFIGURATION				
Setting	J5	J6	J7	J8
Enabled	Open	Open	Open	Open
Disabled	Closed	Closed	Closed	Closed