


LEADING EDGE PRODUCTS, INC. MODEL D3/SX (VERSION 1)

Processor	80386SX
Processor Speed	16MHz
Chip Set	Zymos
Max. onboard DRAM	4MB
Cache	None
BIOS	Leading Edge
Dimensions	325mm x 308mm
I/O Options	Floppy drive interface, mouse port, parallel port, serial ports (2)
NPU Options	80387SX

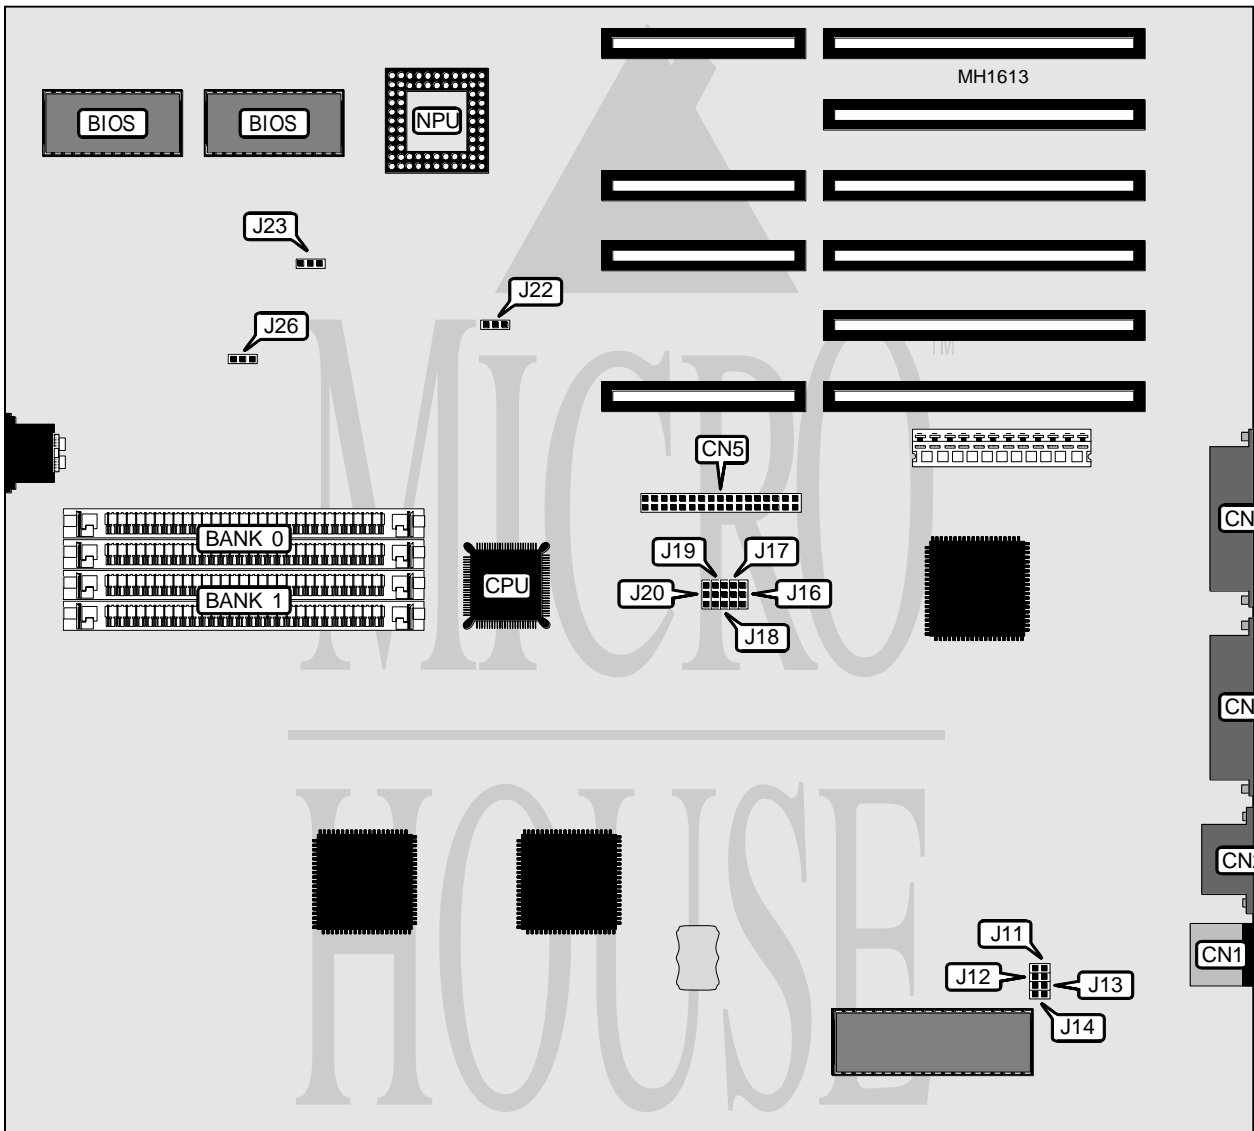

Continued on next page . . .

LEADING EDGE PRODUCTS, INC.

MODEL D3/SX (VERSION 1)

... continued from previous page

CONNECTIONS

Purpose	Location	Purpose	Location
Mouse port	CN1	Parallel port	CN4
Serial port 2	CN2	Floppy drive interface	CN5
Serial port 1	CN3		

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Floppy drive interface enabled	J19	pins 2 & 3 closed
Floppy drive interface disabled	J19	pins 1 & 2 closed
í Monitor type select color	J26	pins 2 & 3 closed
Monitor type select monochrome	J26	pins 1 & 2 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	J22	J23
512KB	(2) 256K x 9	None	pins 2 & 3	pins 2 & 3
1MB	(2) 256K x 9	(2) 256K x 9	pins 1 & 2	pins 2 & 3
2MB	(2) 1M x 9	NONE	pins 2 & 3	pins 1 & 2
4MB	(2) 1M x 9	(2) 1M x 9	pins 1 & 2	pins 1 & 2

Note: Pins designated should be in the closed position.

PARALLEL PORT CONFIGURATION

IRQ	ADDRESS	J17	J20
í 7	378h	pins 2 & 3 closed	pins 2 & 3 closed
5	378h	pins 2 & 3 closed	pins 1 & 2 closed
7	278h	pins 1 & 2 closed	pins 2 & 3 closed
5	278h	pins 1 & 2 closed	pins 1 & 2 closed
Disabled	Disabled	Open	Open

SERIAL PORT CONFIGURATION

Port 1	Port 2	J16	J18
í COM1	íCOM2	pins 1 & 2 closed	pins 1 & 2 closed
COM1	COM4	pins 2 & 3 closed	pins 1 & 2 closed
COM1	Disabled	Open	pins 1 & 2 closed
COM3	COM2	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	COM2	pins 1 & 2 closed	Open
COM3	COM4	pins 2 & 3 closed	pins 2 & 3 closed
Disabled	COM4	pins 2 & 3 closed	Open
Disabled	Disabled	Open	Open

MOUSE PORT INTERRUPTS

IRQ	J11	J12	J13	J14
í IRQ9	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed