
## UNIDENTIFIED

## ELT 286B (MODEL 160B, 120B)

**Processor** 80286 **Processor Speed** 10/16MHz C & T NEAT Chip Set Max. Onboard DRAM 4MB Cache None

**BIOS** AMI/Award/Phoenix **Dimensions** 332mm x 216mm

I/O Options None **NPU Options** 80287

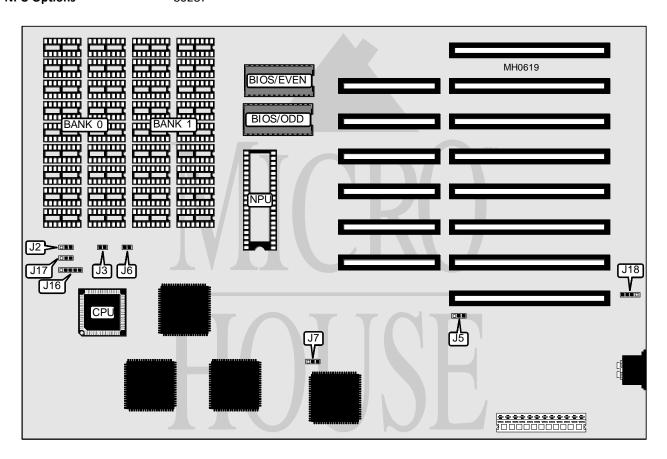

CONNECTIONS					
Purpose	Location	Purpose	Location		
Turbo LED	J3	Speaker	J17		
Reset switch	J6	External battery	J18		
Power LED & keylock	J16				

Continued on next page . . .

## UNIDENTIFIED

## ELT 286B (MODEL 160B, 120B)

 $\dots$  continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í CPU speed select switchable at keyboard	J2	pins 1 & 2 closed		
CPU speed select forced high	J2	pins 2 & 3 closed		
í Monitor type select color	J5	pins 1 & 2 closed		
Monitor type select monochrome	J5	pins 2 & 3 closed		
í Reset select normal	J7	pins 1 & 2 closed		
Reset select for chip register setup	J7	pins 2 & 3 closed		

DRAM CONFIGURATION					
Size	EMS range	Bank 0	Bank 1		
512KB	NONE	(18) 41256	NONE		
640KB	NONE	(18) 41256	(18) 4164		
1MB	1MBto 1.384MB	(18) 41256	(18) 41256		
2MB	1MBto 2MB	(18) 411000	NONE		
4MB	1MBto 4MB	(18) 411000	(18) 411000		