


UNIDENTIFIED

386SX-20/25

Processor 80386SX
Processor Speed 20/25MHz
Chip Set Headland
Max. onboard DRAM 8MB
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80387SX

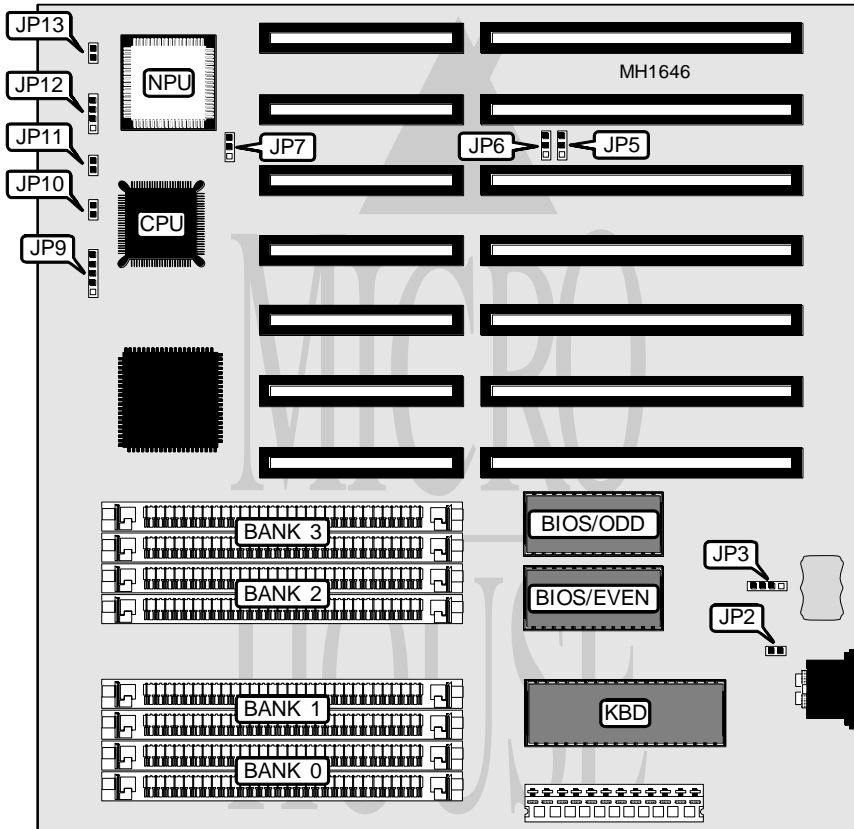

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP3	Turbo Switch	JP11
Power LED & keylock	JP9	Speaker	JP12
Turbo LED	JP10	Reset	JP13

Continued on next page . . .

UNIDENTIFIED

386SX-20/25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

PIPELINE MODE CONFIGURATION				
Mode	CPU Speed	JP5	JP6	JP7
Enabled	20 or 25MHz	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	20mhz only	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed