


# MITAC INTERNATIONAL CORPORATION

## IB-3033

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	TI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	32/64/128KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387/3167

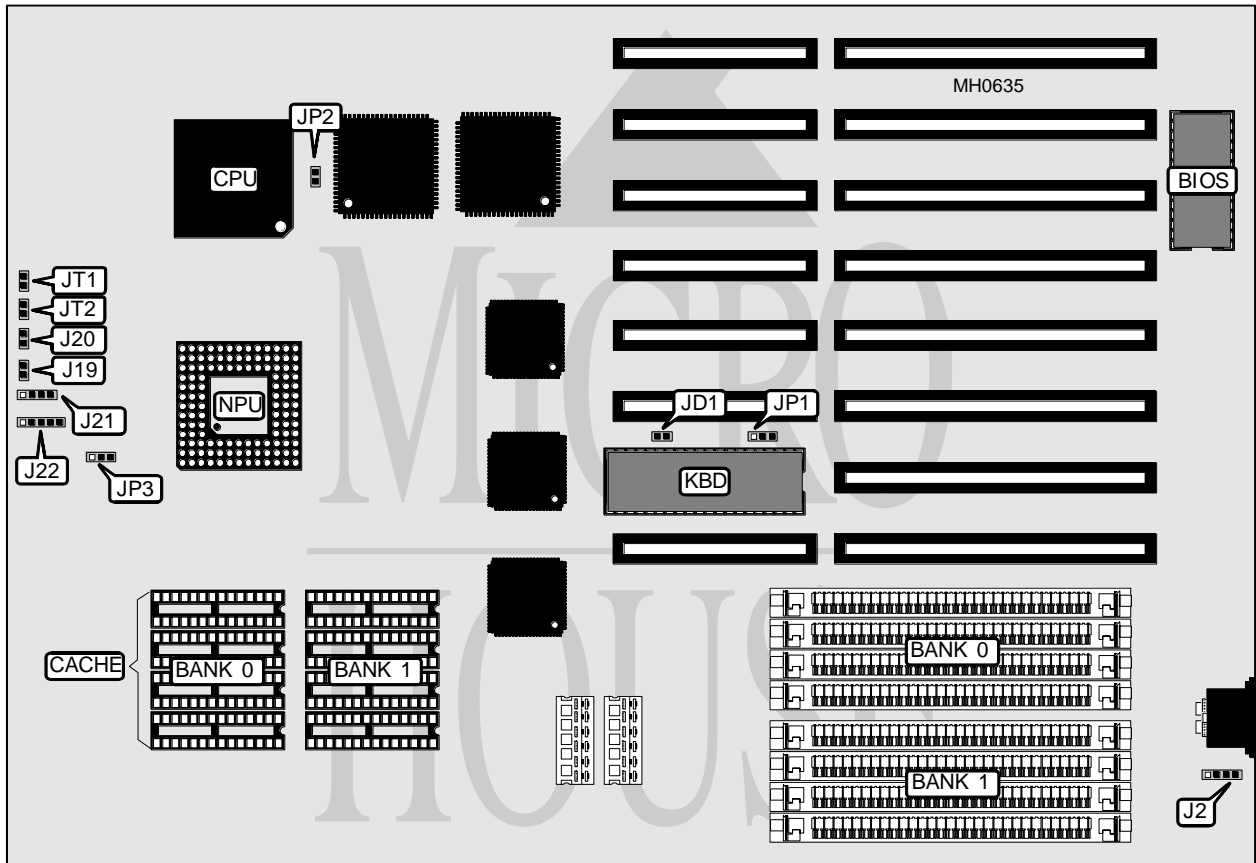

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Power LED & keylock	J22
Reset switch	J19	Turbo switch	JT1
Power LED	J20	Turbo LED	JT2
Speaker	J21		

Continued on next page . . .

## MITAC INTERNATIONAL CORPORATION

## IB-3033

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Factory configured - do not alter	JD1	Open
í Monitor type select monochrome	JP1	pins 2 & 3 closed
Monitor type select color	JP1	pins 1 & 2 closed
í Pipeline mode enabled	JP2	Closed
Pipeline mode disabled	JP2	Open

## DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

## CACHE CONFIGURATION

Size	Bank 0	Bank 1
32KB	(4) 8K x 8	NONE
64KB	(4) 8K x 8	(4) 8K x 8
128KB	(4) 32K x 8	NONE

## CACHE JUMPER CONFIGURATION

Size	JP3
32KB	pins 1 & 2 closed
64KB	pins 1 & 2 closed
128KB	pins 2 & 3 closed