


BIOSTAR MICROTECH INTERNATIONAL CORPORATION

MB-1325P(D), MB-1325P(M)

| | |
|--------------------------|----------------------------------|
| Processor | 80386DX |
| Processor Speed | 25MHz |
| Chip Set | OPTI |
| Max. Onboard DRAM | 8MB |
| Cache | None |
| BIOS | AMI |
| Dimensions | 330mm x 218mm |
| I/O Options | 32-bit external memory card slot |
| NPU Options | 80387/3167 |

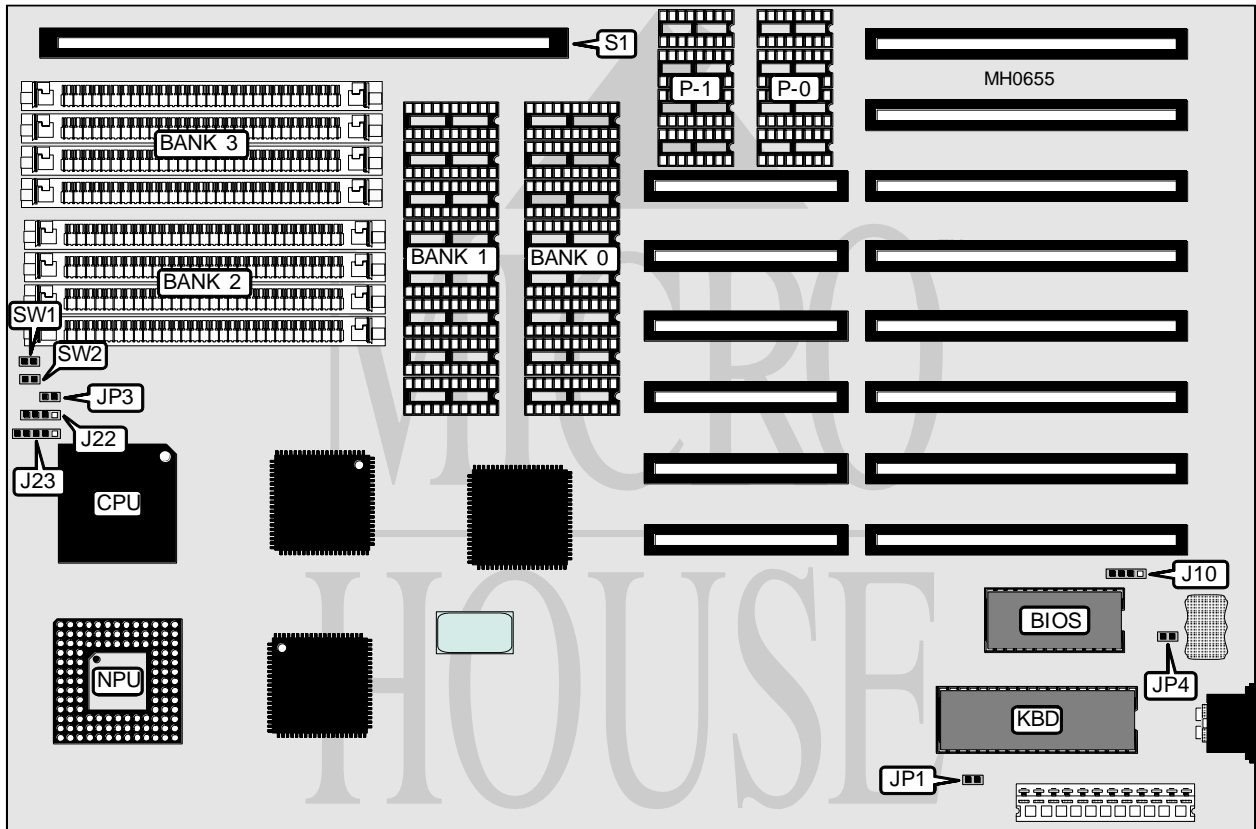

| CONNECTIONS | | | |
|---------------------|----------|-----------------------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | J10 | 32-bit external memory card | S1 |
| Speaker | J22 | Reset switch | SW1 |
| Power LED & keylock | J23 | Turbo switch | SW2 |
| Turbo LED | JP3 | | |

Continued on next page . . .

BIOSTAR MICROTECH INTERNATIONAL CORPORATION

MB-1325P(D), MB-1325P(M)

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--------------------------------|--------|----------|
| Function | Jumper | Position |
| í Monitor type select color | JP1 | Closed |
| Monitor type select monochrome | JP1 | Open |
| í Battery select internal | JP4 | Closed |
| Battery select external | JP4 | Open |

| DRAM CONFIGURATION | | | | | | |
|--------------------|-----------|-----------|-----------|-----------|--------------|--------------|
| Size | Bank 0 | P-0 | Bank 1 | P-1 | Bank 2 | Bank 3 |
| 1MB | (8) 44256 | (4) 41256 | NONE | NONE | NONE | NONE |
| 1MB | NONE | NONE | NONE | NONE | (4) 256K x 9 | NONE |
| 2MB | (8) 44256 | (4) 41256 | (8) 44256 | (4) 41256 | NONE | NONE |
| 2MB | NONE | NONE | NONE | NONE | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | NONE | NONE | NONE | NONE | (4) 1M x 9 | NONE |
| 8MB | NONE | NONE | NONE | NONE | (4) 1M x 9 | (4) 1M x 9 |