


UNIDENTIFIED

386 CACHE 25/33

| | |
|--------------------------|----------------------------------|
| Processor | 80386DX |
| Processor Speed | 25/33MHz |
| Chip Set | UMC |
| Max. Onboard DRAM | 8MB |
| Cache | 64KB |
| BIOS | AMI |
| Dimensions | 355mm x 304mm |
| I/O Options | 32-bit external memory card slot |
| NPU Options | 80387 |

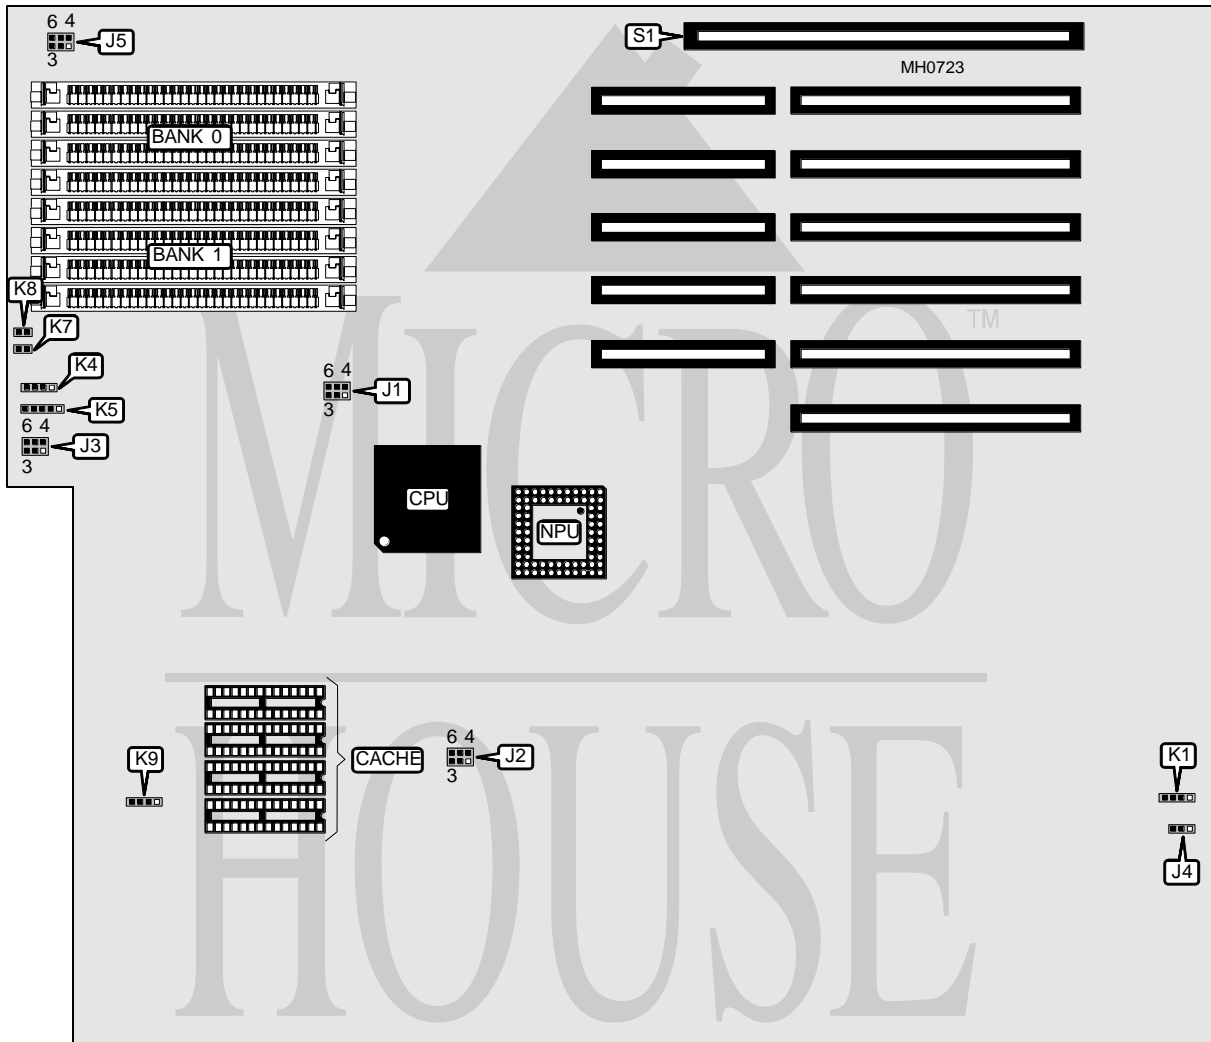

| CONNECTIONS | | | |
|---------------------|----------|-----------------------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | K1 | Turbo LED | K8 |
| Speaker | K4 | Turbo switch | K9 |
| Power LED & keylock | K5 | 32-bit external memory card | S1 |
| Reset switch | K7 | | |

Continued on next page . . .

UNIDENTIFIED

386 CACHE 25/33

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|----------------------------------------|---------------|--------------------------|
| Function | Jumper | Position |
| í NPU disabled | J2 | pins 2 & 3, 5 & 6 closed |
| NPU enabled | J2 | pins 1 & 2, 4 & 5 closed |
| í Upper memory enabled (384KB) | J3 pins 3 & 6 | Open |
| Upper memory disabled (384KB) | J3 pins 3 & 6 | Closed |
| í Monitor type select color | J4 | pins 2 & 3 closed |
| Monitor type select monochrome | J4 | pins 1 & 2 closed |
| í Memory expansion board not installed | J5 | pins 1 & 2, 4 & 5 closed |
| Memory expansion board installed | J5 | pins 2 & 3, 5 & 6 closed |

| DRAM CONFIGURATION | | |
|--------------------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (4) 256K x 9 | NONE |
| 2MB | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | (4) 1M x 9 | NONE |
| 8MB | (4) 1M x 9 | (4) 1M x 9 |

| DRAM JUMPER CONFIGURATION | |
|---------------------------|--------------------------|
| Size | J3 |
| 1MB | pins 1 & 4, 2 & 5 closed |
| 2MB | pins 2 & 5 closed |
| 4MB | pins 1 & 4 closed |
| 8MB | Open |

| BIOS CONFIGURATION | |
|--------------------|--------------------------|
| Size | J1 |
| 27256 | pins 1 & 2, 5 & 6 closed |
| 27512 | pins 1 & 2, 4 & 5 closed |
| 27128 | pins 2 & 3, 5 & 6 closed |