


REPLY CORPORATION

PS/2 MODEL 60/80

Processor	80486SX/80487SX/80486DX/80486DX2
Processor Speed	33/66(internal)MHz
Chip Set	Galaxy
Max. Onboard DRAM	128MB
Cache	128KB (external)
BIOS	Reply
Dimensions	356mm x 304mm
I/O Options	32-bit MCA with extended video slot, Floppy drive interface IDE interface, parallel port, PS/2 mouse port, serial port, VGA port
NPU Options	None

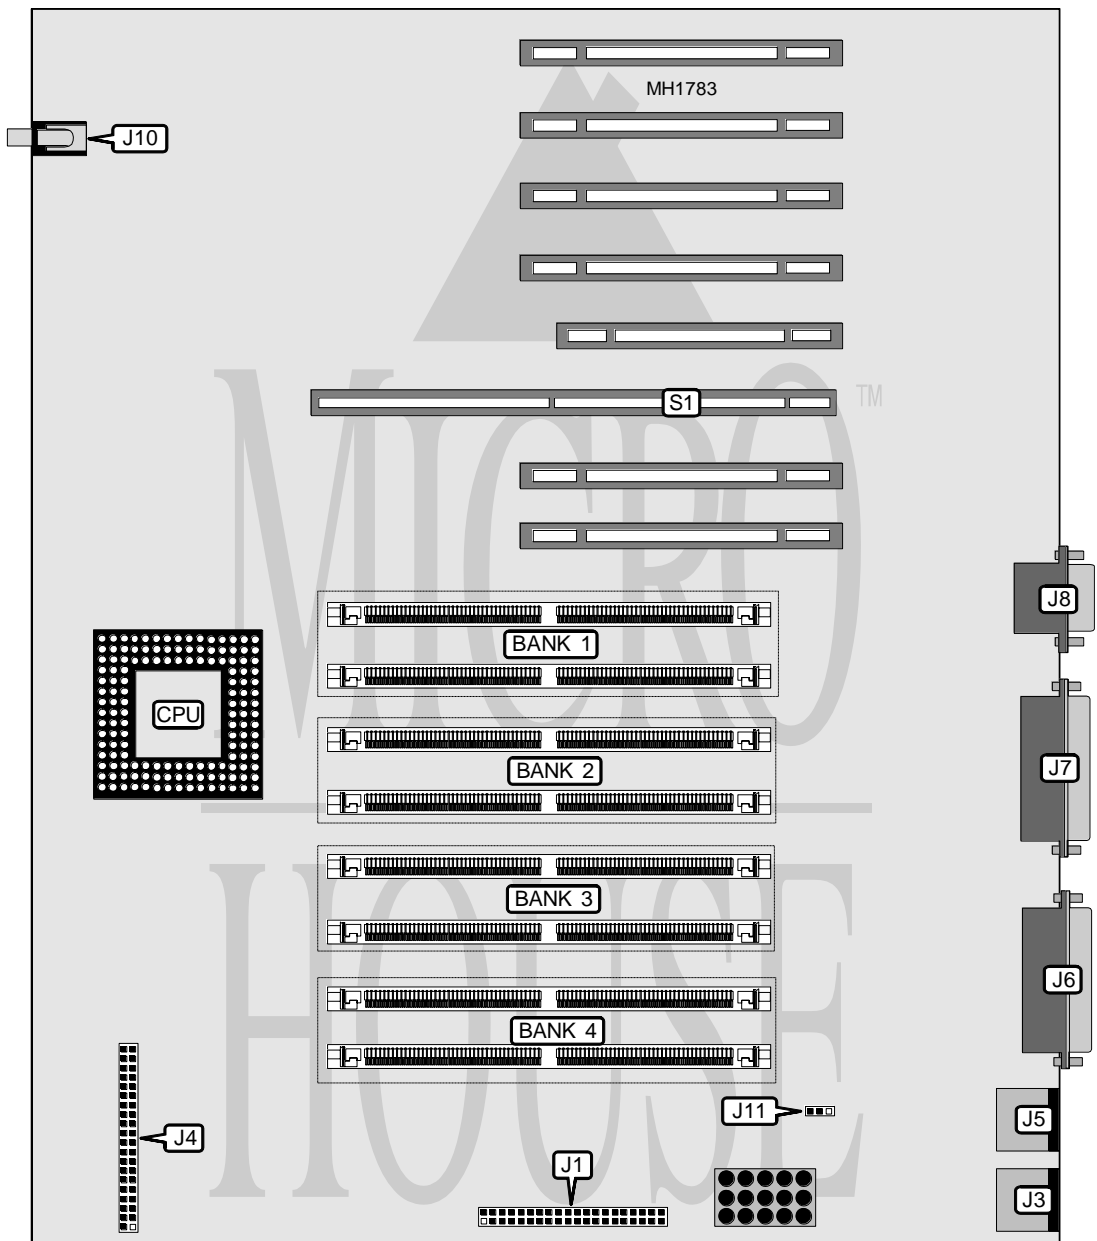

Continued next page...

REPLY CORPORATION

PS/2 MODEL 60/80

... continued from previous page.

CONNECTIONS			
Purpose	Location	Purpose	Location
ATA hard disk connector	J1	Parallel port	J7
PS/2 mouse port	J3	Serial port	J8
Floppy drive interface	J4	Speaker	J10
PS/2 mouse port	J5	32-bit MCA w/ extended video slot	S1
VGA port	J6		

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J11	pins 2 & 3 closed
CMOS memory clear	J11	pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 1	Bank 2	Bank 3	Bank 4
2MB	(2) 1M x 36	(2) 1M x 36	NONE	NONE
4MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
4MB	(2) 2M x 36	(2) 2M x 36	NONE	NONE
6MB	(2) 1M x 36	(2) 1M x 36	(2) 2M x 36	(2) 2M x 36
6MB	(2) 2M x 36	(2) 2M x 36	(2) 1M x 36	(2) 1M x 36
8MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
8MB	(2) 4M x 36	(2) 4M x 36	NONE	NONE
10MB	(2) 1M x 36	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
10MB	(2) 4M x 36	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
12MB	(2) 2M x 36	(2) 2M x 36	(2) 4M x 36	(2) 4M x 36
12MB	(2) 4M x 36	(2) 4M x 36	(2) 2M x 36	(2) 2M x 36
16MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
16MB	(2) 8M x 36	(2) 8M x 36	NONE	NONE
18MB	(2) 1M x 36	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36
18MB	(2) 8M x 36	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
20MB	(2) 2M x 36	(2) 2M x 36	(2) 8M x 36	(2) 8M x 36
20MB	(2) 8M x 36	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
24MB	(2) 4M x 36	(2) 4M x 36	(2) 8M x 36	(2) 8M x 36
24MB	(2) 8M x 36	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
32MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
32MB	(2) 16M x 36	(2) 16M x 36	NONE	NONE
34MB	(2) 1M x 36	(2) 1M x 36	(2) 16M x 36	(2) 16M x 36
34MB	(2) 16M x 36	(2) 16M x 36	(2) 1M x 36	(2) 1M x 36
36MB	(2) 2M x 9	(2) 2M x 36	(2) 16M x 36	(2) 16M x 36
36MB	(2) 16M x 36	(2) 16M x 36	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 4M x 36	(2) 16M x 36	(2) 16M x 36
40MB	(2) 16M x 36	(2) 16M x 36	(2) 4M x 36	(2) 4M x 36
48MB	(2) 8M x 36	(2) 8M x 36	(2) 16M x 36	(2) 16M x 36
48MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36	(2) 8M x 36

Continued next page...

REPLY CORPORATION

PS/2 MODEL 60/80

... continued from previous page.

DRAM CONFIGURATION (CONT.)				
Size	Bank 1	Bank 2	Bank 3	Bank 4
64MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36
64MB	(2) 32M x 36	(2) 32M x 36	NONE	NONE
66MB	(2) 1M x 36	(2) 1M x 36	(2) 32M x 36	(2) 32M x 36
66MB	(2) 32M x 36	(2) 32M x 36	(2) 1M x 36	(2) 1M x 36

DRAM CONFIGURATION (CONT.)				
Size	Bank 1	Bank 2	Bank 3	Bank 4
68MB	(2) 2M x 36	(2) 2M x 36	(2) 32M x 36	(2) 32M x 36
68MB	(2) 32M x 36	(2) 32M x 36	(2) 2M x 36	(2) 2M x 36
72MB	(2) 4M x 36	(2) 4M x 36	(2) 32M x 36	(2) 32M x 36
72MB	(2) 32M x 36	(2) 32M x 36	(2) 4M x 36	(2) 4M x 36
80MB	(2) 32M x 36	(2) 32M x 36	(2) 8M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 8M x 36	(2) 32M x 36	(2) 32M x 36
96MB	(2) 16M x 36	(2) 16M x 36	(2) 32M x 36	(2) 32M x 36
96MB	(2) 32M x 36	(2) 32M x 36	(2) 16M x 36	(2) 16M x 36
128MB	(2) 32M x 36	(2) 32M x 36	(2) 32M x 36	(2) 32M x 36