


EVEREX SYSTEMS, INC.

TEMPO 386SX (EV-1863(B))

Processor	80386SX
Processor Speed	25MHz
Chip Set	Everex
Max. Onboard DRAM	8MB
Cache	None
BIOS	Everex
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

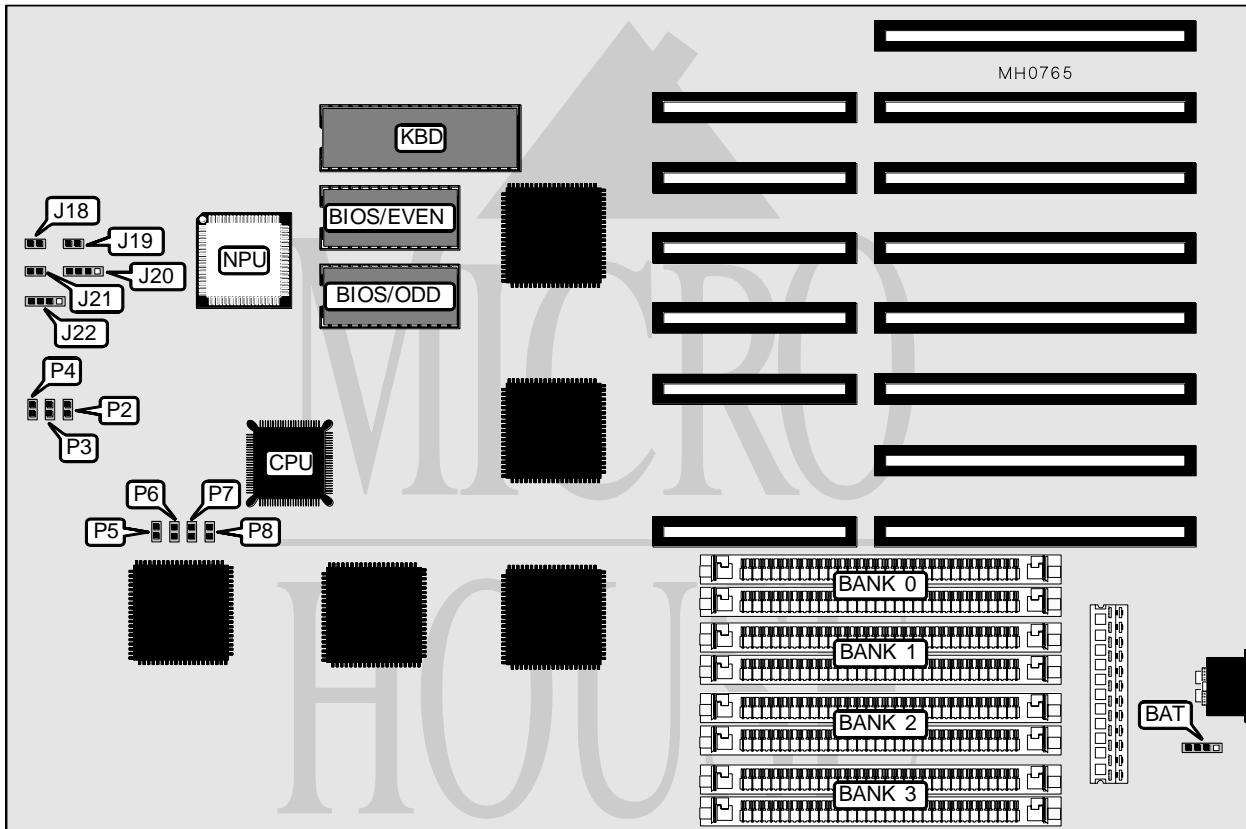

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BAT	Speaker	J20
Turbo switch	J18	Reset switch	J21
Turbo LED	J19	Power LED & keylock	J22

Continued on next page . . .

EVEREX SYSTEMS, INC.
 TEMPO 386SX (EV-1863(B))

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í ROM wait states select 2	P5	Open
ROM wait states select 3	P5	Closed
í DRAM read wait states select 0	P6	Closed
DRAM read wait state select 1	P6	Open
í DRAM write wait states select 0	P7	Closed
DRAM write wait state select 1	P7	Open
í Shadow RAM disabled	P8	Closed
Shadow RAM enabled	P8	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION			
Size	P2	P3	P4
512KB	Open	Closed	Closed
1MB	Closed	Open	Closed
2MB	Open	Open	Closed
2MB	Open	Closed	Open
4MB	Closed	Open	Open
8MB	Open	Open	Open