


REPLY CORPORATION

PS/2 MODEL 30 UPGRADE

Processor	80486SX
Processor Speed	25MHz
Chip Set	Galaxy
Max. Onboard DRAM	32MB
Cache	None
BIOS	Reply
Dimensions	254mm x 218mm
I/O Options	Floppy drive interface, IDE interface, ST506 interface, parallel port, PS/2 mouse port, serial port, VGA feature connector
NPU Options	None

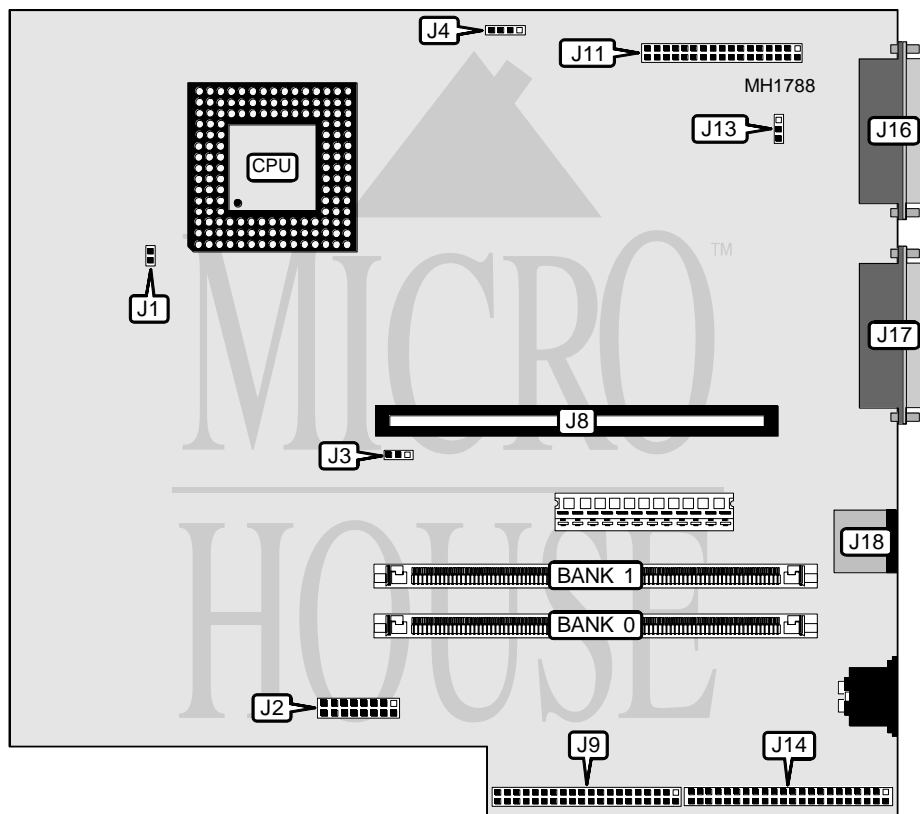

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA feature connector	J2	ST 506/412 interface	J14
Disk drive power supply	J3	Parallel port	J16
Riser card adapter	J8	Serial port	J17
IDE interface (AT)	J9	PS/2 mouse port	J18
Floppy drive interface	J11		

Continued next page...

REPLY CORPORATION

PS/2 MODEL 30 UPGRADE

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J1	N/A
í Factory configured - do not alter	J4	N/A
í CMOS memory normal operation	J13	pins 1 & 2 closed
CMOS memory clear	J13	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(1) 1M x 36	NONE
8MB	(1) 1M x 36	(1) 1M x 36
8MB	(1) 2M x 36	NONE
12MB	(1) 2M x 36	(1) 1M x 36
16MB	(1) 2M x 36	(1) 2M x 36
16MB	(1) 4M x 36	NONE
20MB	(1) 4M x 36	(1) 1M x 36
24MB	(1) 4M x 36	(1) 2M x 36
32MB	(1) 4M x 36	(1) 4M x 36