
## GIGA-BYTE TECHNOLOGY CO., LTD. G A - 3 8 6 L

Processor
Processor Speed
Chip Set
Max. Onboard DRAM
Cache
BIOS
Dimensions
I/O Options
NPU Options

80386DX 16/20MHz C & T 8MB None AMI 355mm x 304mm 32-bit external memory card 80287/80387DX

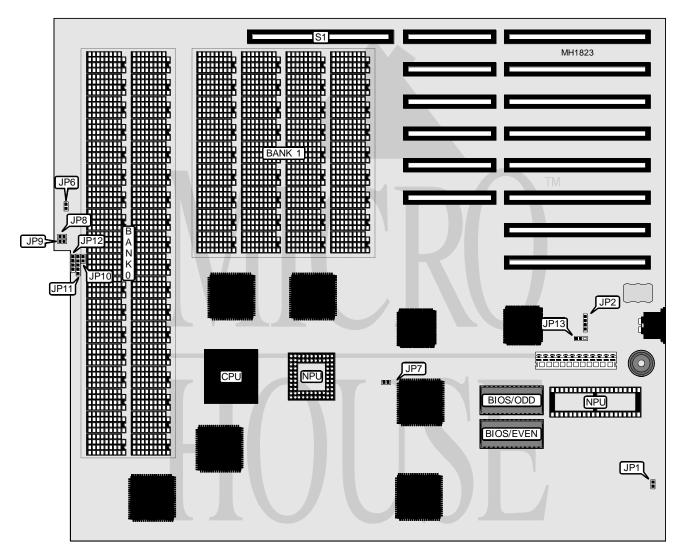

Continued next page...

## GIGA-BYTE TECHNOLOGY CO., LTD. G A - 3 8 6 L

... continued from previous page.

CONNECTIONS					
Purpose	Location	Purpose	Location		
External battery	JP2	Power LED & keylock	JP11		
Reset switch	JP6	Speaker	JP12		
Turbo LED	JP8	32-bit external memory card	S1		
Turbo switch	JP10				

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select color	JP1	Closed		
Monitor type select monochrome	JP1	Open		
í CMOS memory normal operation	JP13	pins 1 & 2 closed		
CMOS memory clear	JP13	pins 2 & 3 closed		

NPU CONFIGURATION					
NPU	JP7	JP9			
NONE	Open	Open			
80287	Open	Closed			
80387DX	Closed	Closed			

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
2MB	(36) 41256	(36) 41256		
8MB	(36) 411000	(36) 411000		