


# PIONEER COMPUTER, INC.

## VANTAGE 486NC DX-33/DX2-50/DX2-66

<b>Processor</b>	80486DX/80486DX2
<b>Processor Speed</b>	25/33/50(internal)/66(internal)MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	240mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

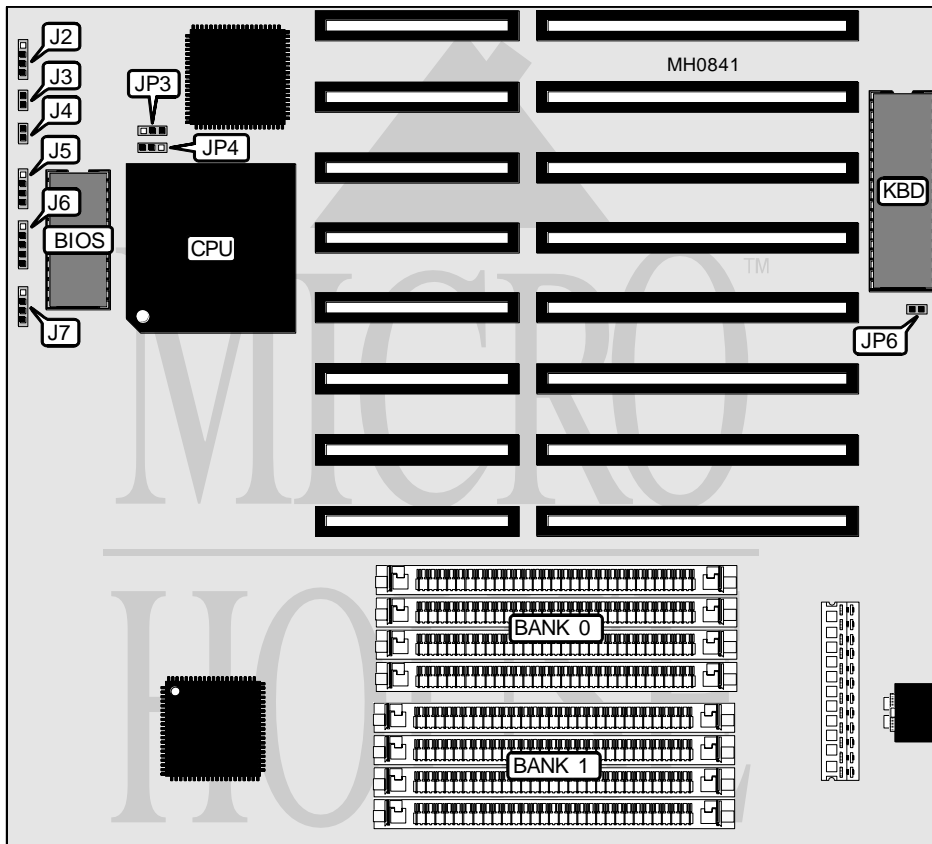

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	J2	Speaker	J5
Turbo switch	J3	Power LED & keylock	J6
Reset switch	J4	External battery	J7

Continued on next page . . .

## PIONEER COMPUTER, INC.

## VANTAGE 486NC DX-33/DX2-50/DX2-66

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP3	pins 1 & 2 closed
CMOS memory clear	JP3	pins 2 & 3 closed
í Factory configured - do not alter	JP4	pins 1 & 2 closed
í Factory configured - do not alter	JP6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9