


# ASUS COMPUTER INTERNATIONAL EISA-486A

**Processor** 80486DX  
**Processor Speed** 50MHz  
**Chip Set** Intel  
**Max. Onboard DRAM** 64MB  
**Cache** 64/128/256KB  
**BIOS** Award  
**Dimensions** 330mm x 218mm  
**I/O Options** None  
**NPU Options** 4167

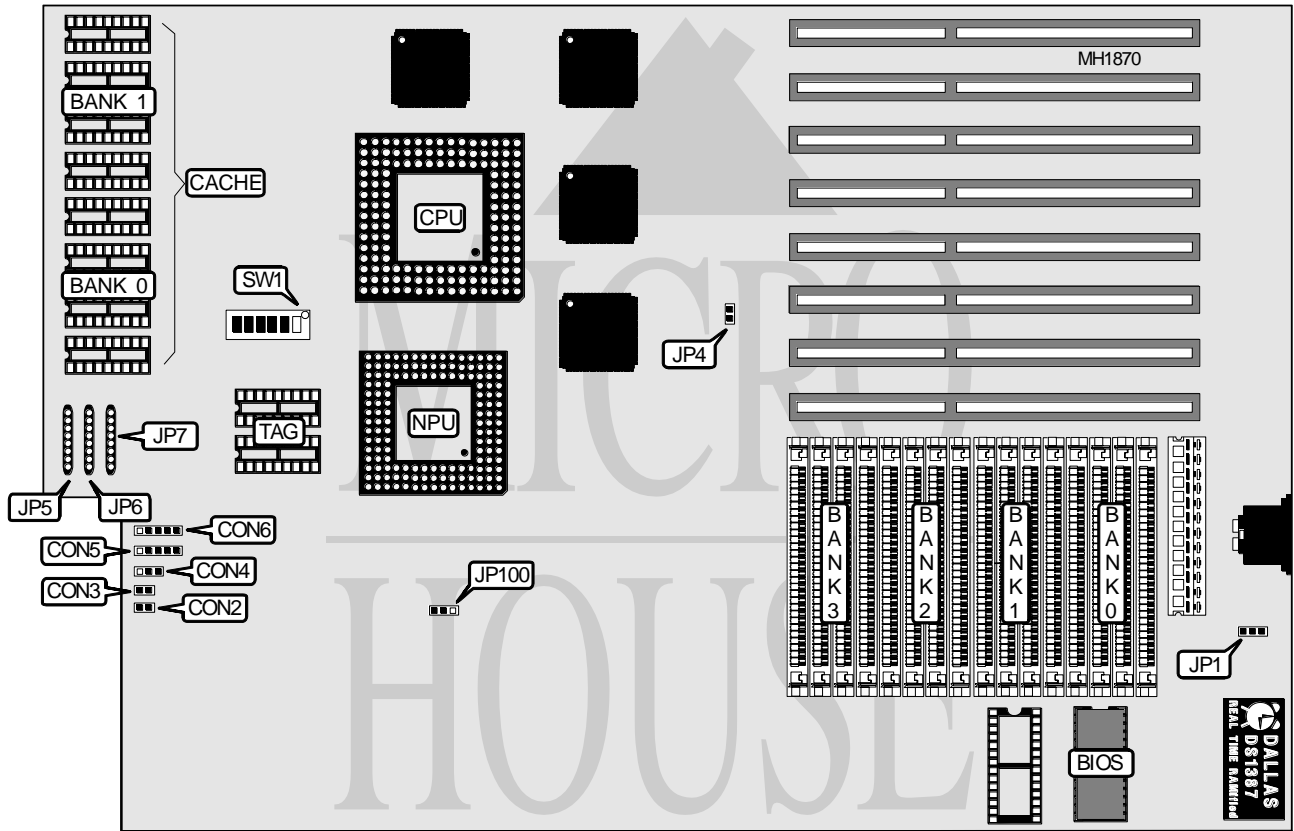

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	CON2	Speaker	CON5
Turbo switch	CON3	Keylock & LED	CON6
Turbo LED	CON4		

Continued on next page. . .

# ASUS COMPUTER INTERNATIONAL

## EISA - 486 A

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
i Monitor type select monochrome	JP1	pins 1 & 2 closed
Monitor type select color	JP1	pins 2 & 3 closed
i CPU speed select 50MHz	JP4	Open
i NPU asynchronous	JP100	pins 2 & 3 closed
NPU synchronous with CPU	JP100	pins 1 & 2 closed

CPU TYPE						
Type	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
i 80486DX	On	On	On	Off	Off	Off

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(2) 16K x 4
128KB	(4) 32K x 8	NONE	(2) 64K x 4
256KB	(4) 32K x 8	(4) 32K x 8	(2) 64K x 4

CACHE SIZE			
Size	JP5	JP6	JP7
64KB	Not installed	Not installed	Installed
128KB	Not installed	Installed	Not installed
256KB	Installed	Not installed	Not installed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	NONE
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9