MICRO EXPRESS, INC. FOREX 386 CACHE

80386DX **Processor Processor Speed** 33/40MHz **FOREX Chip Set** Max. Onboard DRAM 32MB


Cache 64/128/256KB

BIOS AMI

Dimensions 330mm x 218mm

I/O Options None

NPU Options 80387DX/3167

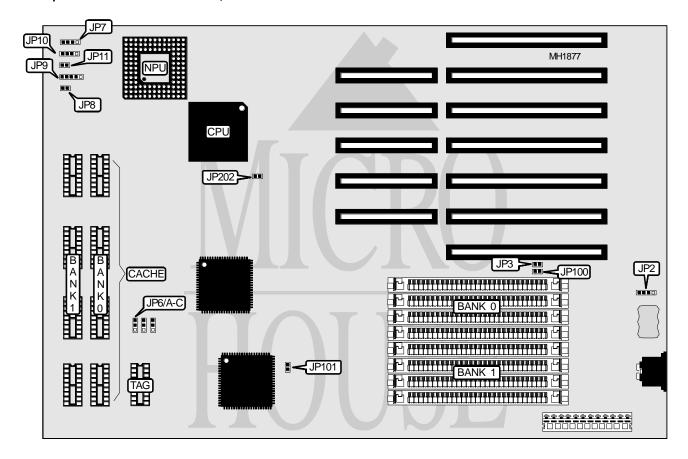

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Keylock & power LED	JP9
Turbo LED	JP7	Speaker	JP10
Reset switch	JP8	Turbo switch	JP11

Continued on next page. . .

MICRO EXPRESS, INC. FOREX 386 CACHE

 $\dots continued\ from\ previous\ page$

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Factory configured - do not alter	JP3	N/A		
í Factory configured - do not alter	JP100	N/A		
í DRAM parity check enabled	JP101	Closed		
DRAM parity check disabled	JP101	Open		
í CMOS normal operation	JP202	Open		
CMOS memory clear	JP202	Closed		

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	NONE	(4) 32K x 8	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	JP6/A	JP6/B	JP6/C
64KB	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
128KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
256KB	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	
1MB	(4) 256K x 9	NONE	
2MB	(4) 256K x 9	(4) 256K x 9	
4MB	(4) 1M x 9	NONE	
5MB	(4) 256K x 9	(4) 1M x 9	
8MB	(4) 1M x 9	(4) 1M x 9	
16MB	(4) 4M x 9	NONE	
20MB	(4) 1M x 9	(4) 4M x 9	
32MB	(4) 4M x 9	(4) 4M x 9	