


ADVANCED LOGIC RESEARCH, INC. EVOLUTION V

Processor	Pentium
Processor Speed	60MHz
Chip Set	ALR
Max. Onboard DRAM	128MB
Cache	256KB
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	32-bit VESA local bus slots (3), BNC, floppy drive interface, IDE interface (2), parallel port, PS/2 mouse port, serial ports (2), RJ11
NPU Options	None

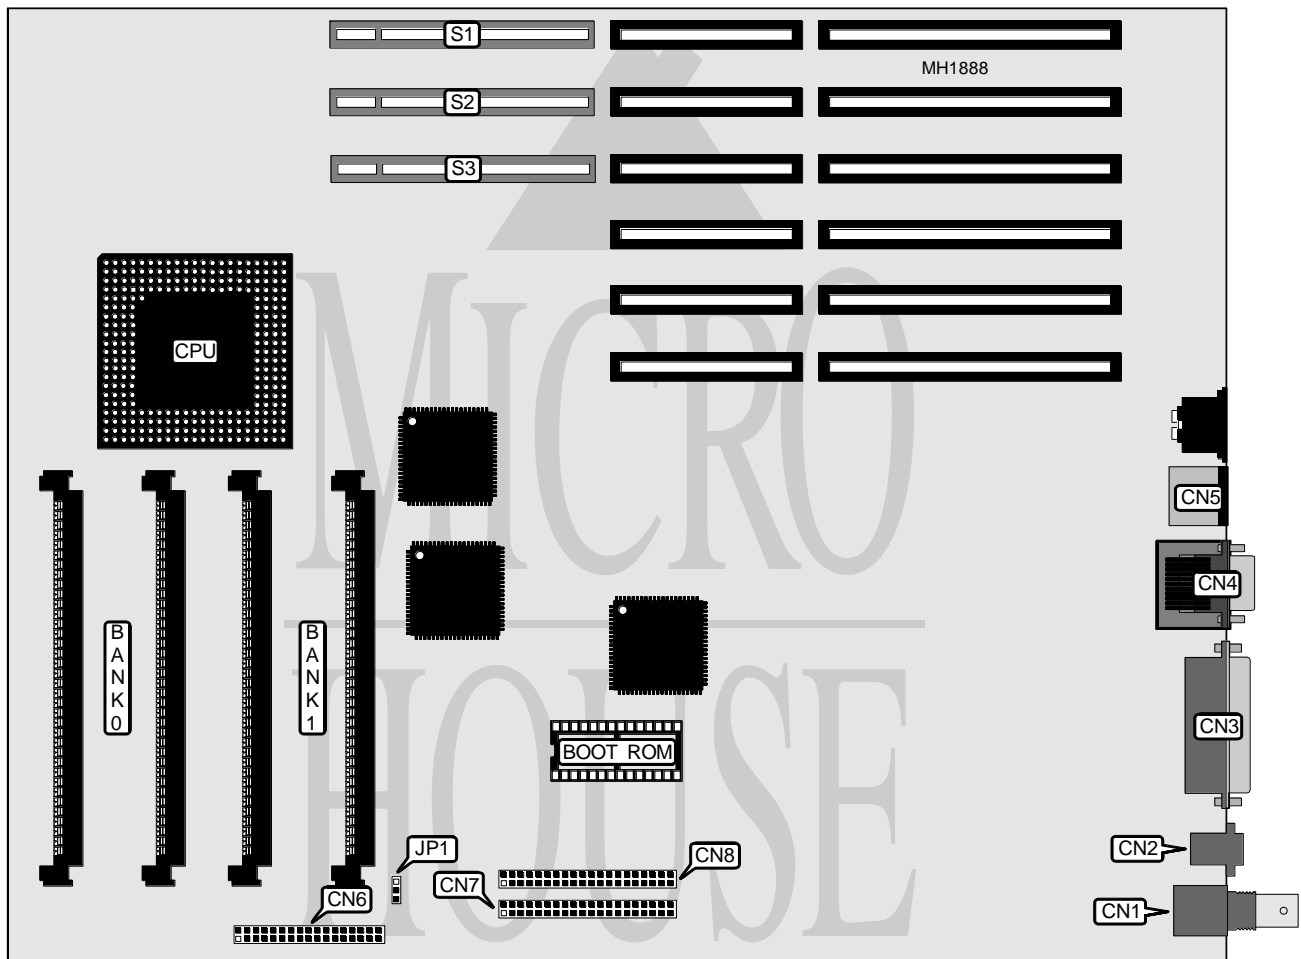

CONNECTIONS			
Purpose	Location	Purpose	Location
BNC	CN1	IDE interface	CN7
RJ11	CN2	IDE interface	CN8
Parallel port	CN3	32-bit VESA Local bus slot	S1
Serial ports 1 & 2	CN4	32-bit VESA Local bus slot	S2
PS/2 mouse port	CN5	32-bit VESA Local bus slot	S3
Floppy drive interface	CN6		

Continued next page...

ADVANCED LOGIC RESEARCH, INC. EVOLUTION V

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	pins 1 & 2 closed
CMOS memory clear	JP1	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 1M x 36	NONE
4MB	(2) 2M x 36	NONE
4MB	(2) 1M x 36	(2) 1M x 36
6MB	(2) 1M x 36	(2) 2M x 36
8MB	(2) 2M x 36	(2) 2M x 36
8MB	(2) 4M x 36	NONE
10MB	(2) 1M x 36	(2) 4M x 36
12MB	(2) 2M x 36	(2) 4M x 36
16MB	(2) 4M x 36	(2) 4M x 36
16MB	(2) 8M X 36	NONE
18MB	(2) 1M x 36	(2) 8M X 36
20MB	(2) 2M x 36	(2) 8M X 36
24MB	(2) 4M x 36	(2) 8M X 36
32MB	(2) 8M X 36	(2) 8M X 36
32MB	(2) 16M X 36	NONE
34MB	(2) 1M x 36	(2) 16M X 36
36MB	(2) 2M x 36	(2) 16M X 36
40MB	(2) 4M x 36	(2) 16M X 36
48MB	(2) 8M X 36	(2) 16M X 36
64MB	(2) 16M X 36	(2) 16M X 36
64MB	(2) 32M X 36	NONE
66MB	(2) 1M x 36	(2) 32M X 36
68MB	(2) 2M x 36	(2) 32M X 36
72MB	(2) 4M x 36	(2) 32M X 36
80MB	(2) 8M X 36	(2) 32M X 36
96MB	(2) 16M X 36	(2) 32M X 36
128MB	(2) 32M X 36	(2) 32M X 36