


## TULIP COMPUTERS DC COMPACT (TC38)

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	17MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, riser card, serial ports (2), VGA feature connector, VGA port
<b>NPU Options</b>	80387SX

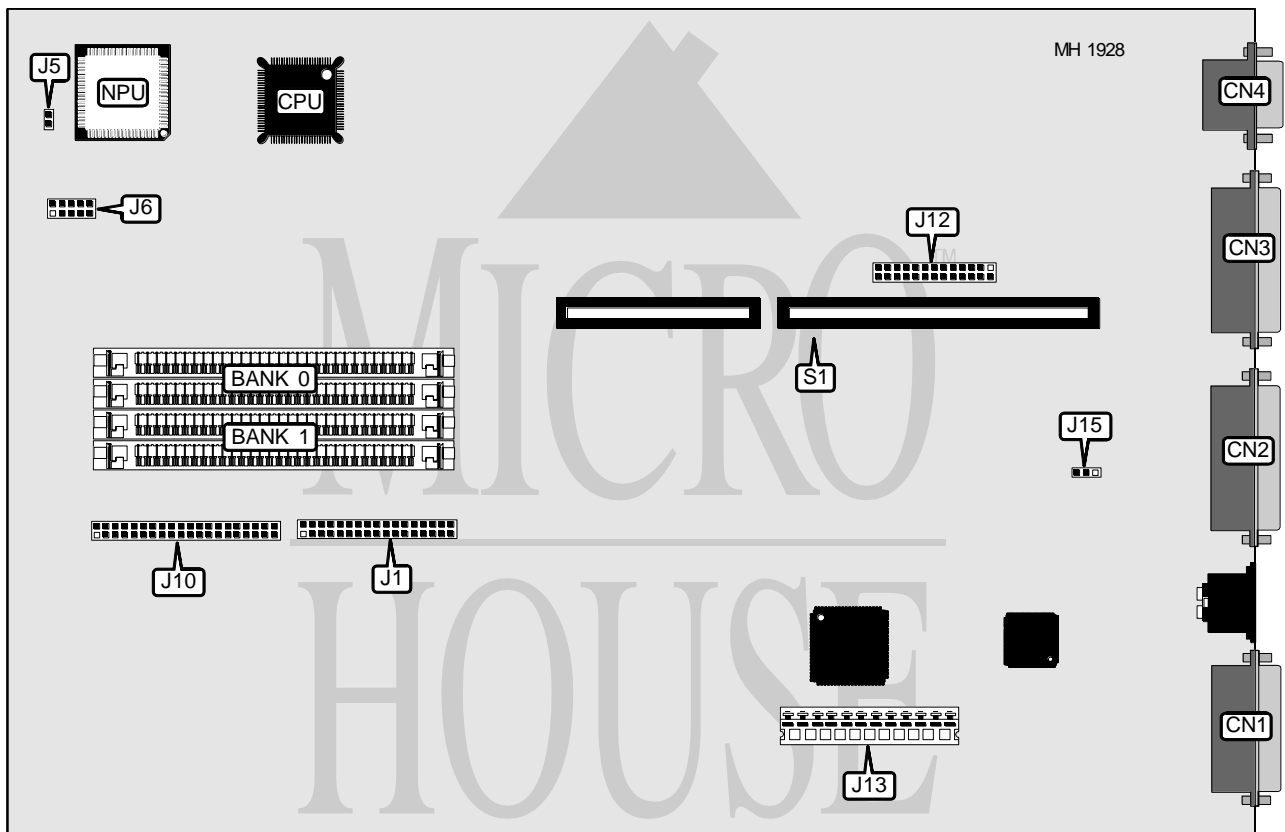

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Flat cable LED Speaker & batteries	J6
Parallel port	CN2	IDE interface	J10
Serial port (COM1)	CN3	VGA feature connector	J12
Serial port (COM2)	CN4	Riser Card Slot	S1
Floppy drive interface	J1		

*Continued next page...*

## TULIP COMPUTERS

### DC COMPACT (TC38)

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Normal batteries installed	J5	Open
Rechargeable batteries installed	J5	Closed
í Parallel port unidirectional (printer)	J15	pins 2 & 3 closed
Parallel port bidirectional	J15	pins 1 & 2 closed

DRAM CONFIGURATION			
Expansion from:	Expansion to:	Bank 0	Bank 1
1MB	1MB	NONE	NONE
1MB	3MB	(2) 1M x 9	NONE
1MB	5MB	(2) 1M x 9	(2) 1M x 9
1MB	9MB	(2) 4M x 9	NONE
1MB	17MB	(2) 4M x 9	(2) 4M x 9

Note: 1MB is factory installed and is not configurable.