


SINGA

P - 9

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	C & T NEAT
Max. Onboard DRAM	8MB
Cache	None
BIOS	CEI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

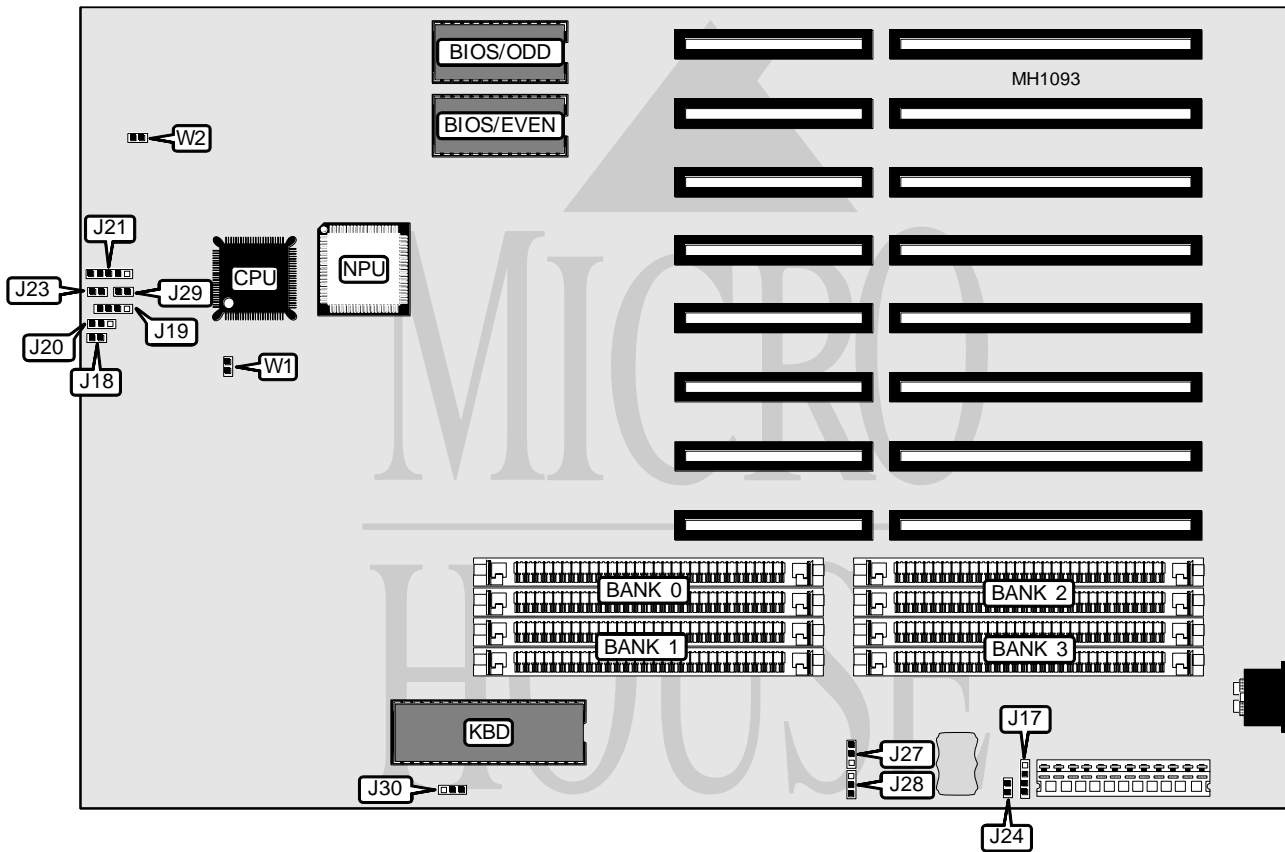

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J17	Power LED & keylock	J21
Reset switch	J18	Turbo LED	J23
Speaker	J19	Turbo switch	J29

Continued on next page . . .

SINGA

P - 9

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU Speed select switchable at turbo switch	J20	pins 1 & 2 closed
CPU Speed select switchable at keyboard	J20	pins 2 & 3 closed
í Monitor type select color	J24	Closed
Monitor type select monochrome	J24	Open
í Battery type select internal	J27	pins 1 & 2 closed
Battery type select external	J27	Open
í Battery charging mode select normal	J28	pins 1 & 2 closed
í Battery charging mode select fast	J28	pins 2 & 3 closed
í Factory configured - do not alter	J30	Open
í Pipeline mode enabled	W1	Closed
Pipeline mode disabled	W1	Open
í NPU absent	W2	Open
NPU present	W2	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9