TULIP COMPUTERS DT 386SX (TC36)

80386SX **Processor Processor Speed** 25MHz

Texas Instruments Chip Set


Max. Onboard DRAM 20MB Cache None **BIOS** Phoenix

Dimensions 330mm x 218mm

Floppy drive interface, IDE interface, parallel port, serial ports(2), VGA feature connector, I/O Options

VGA port

80387SX **NPU Options**

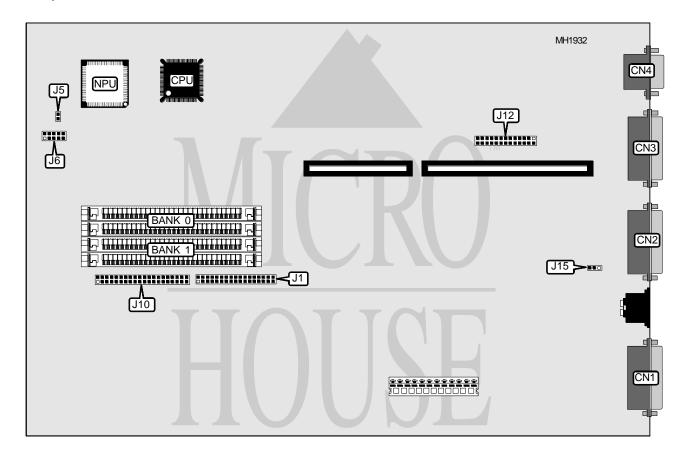

| CONNECTIONS | | | | |
|---------------|----------|-------------------------|----------|--|
| Purpose | Location | Purpose | Location | |
| VGA port | CN1 | Floppy drive interface | J1 | |
| Parallel port | CN2 | LED, Speaker, Batteries | J6 | |
| Serial port 1 | CN3 | IDE interface | J10 | |
| Serial port 2 | CN4 | | | |

Continued next page...

TULIP COMPUTERS DT 386SX (TC36)

. . . continued from previous page.

| USER CONFIGURABLE SETTINGS | | | | |
|--|--------|-------------------|--|--|
| Function | Jumper | Position | | |
| í Battery - Non-rechargeable | J5 | Closed | | |
| Battery - Rechargeable | J5 | Open | | |
| í Parallel port unidirectional (printer) | J15 | pins 1 & 2 closed | | |
| Parallel port bidirectional | J15 | pins 2 & 3 closed | | |

| DRAM CONFIGURATION | | | | | |
|---|--------------|------------|------------|--|--|
| Expansion from: | Expansion to | Bank 0 | Bank 1 | | |
| 4MB | 6MB | (2) 1M x 9 | NONE | | |
| 6MB | 8MB | NONE | (2) 1M x 9 | | |
| 4MB | 12MB | (2) 4M x 9 | NONE | | |
| 4MB | 20MB | NONE | (2) 4M x 9 | | |
| Note: 4MB is internal memory and is not configurable. | | | | | |