


DESTINY COMPUTERS, INC. 386 ACE ADVANTAGE

Processor 80386DX
Processor Speed 25/33/40MHz
Chip Set ETEQ
Max. Onboard DRAM 32MB
Cache 32/64/128/256KB
BIOS AMI
Dimensions 330mm x 218mm
I/O Options 32-bit external memory card slot
NPU Options 80387DX/3167

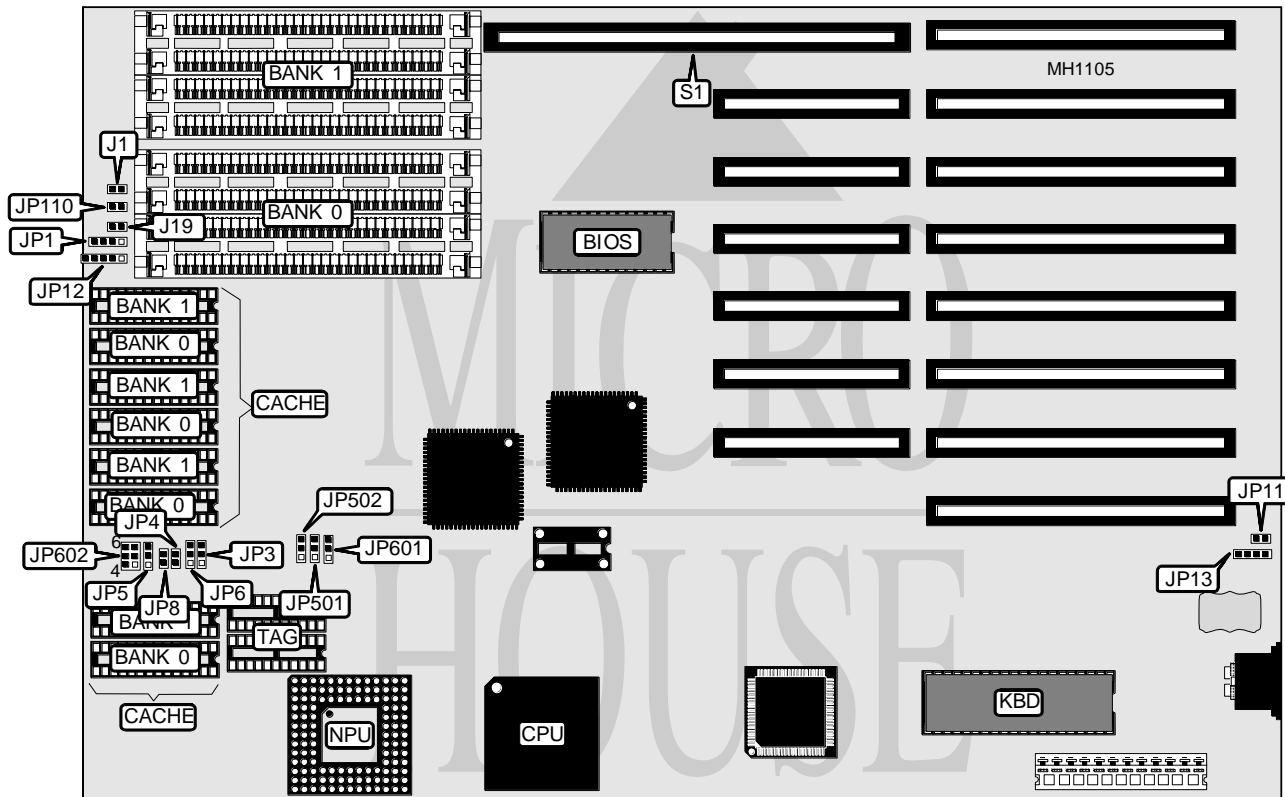

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J1	External battery	JP13
Reset switch	J19	Turbo LED	JP110
Speaker	JP1	32-bit external memory card	S1
Power LED & keylock	JP12		

Continued on next page . . .

DESTINY COMPUTERS, INC.

386 ACE ADVANTAGE

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	JP11	Closed
Battery type select external	JP11	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
32KB	(4) 8K x 8	Bank 0	(2) 16K x 4
64KB	(8) 8K x 8	Banks 0 & 1	(2) 16K x 4
128KB	(4) 32K x 8	Bank 0	(2) 16K x 4
256KB	(8) 32K x 8	Banks 0 & 1	(2) 16K x 4

CACHE JUMPER CONFIGURATION									
Size	JP3	JP4	JP5	JP6	JP8	JP501	JP502	JP601	JP602
32KB	1 & 2	Open	1 & 2	1 & 2	Open	1 & 2	1 & 2	1 & 2	2 & 3
64KB	1 & 2	Closed	1 & 2	2 & 3	Open	1 & 2	1 & 2	1 & 2	1 & 2
128KB	2 & 3	Closed	1 & 2	2 & 3	Closed	2 & 3	1 & 2	1 & 2	4 & 5
256KB	2 & 3	Closed	2 & 3	2 & 3	Closed	2 & 3	2 & 3	2 & 3	5 & 6

Note: Pins designated should be in the closed position.