


ASLAN COMPUTER CORPORATION

C - 6 3 3 3

Processor 80386SX
Processor Speed 16/20/25/33MHz
Chip Set SAIC or ALI
Max. Onboard DRAM 16MB
Cache None
BIOS AMI
Dimensions 220mm x 170mm
I/O Options None
NPU Options None

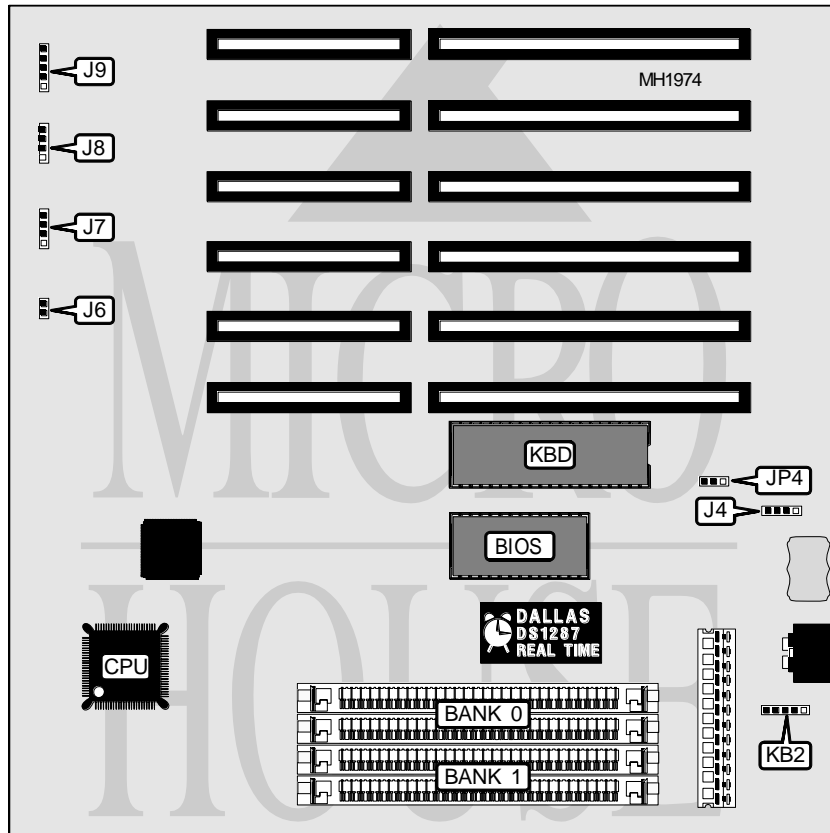

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo switch/LED	J8
Reset switch	J6	Power LED & keylock	J9
Speaker	J7		

Continued next page...

ASLAN COMPUTER CORPORATION

C - 6 3 3 3

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í ADS Delay disable	J5	pins 2 & 3 closed
ADS Delay enable	J5	pins 1 & 2 closed
í Real time clock disabled	JP3	Open
Real time clock enabled	JP3	pins 1 & 2 closed
í Monitor type select monochrome	JP4	pins 1 & 2 closed
Monitor type select color	JP4	pins 2 & 3 closed

Note: The exact location of JP3 is unidentified by the manufacturer.

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512K	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9

Note: The exact location of Bank 0 and Bank 1 is unidentified by the manufacturer.

AT CLOCK SELECTION		
Speed	JP1	JP5
16MHz	pins 1 & 2 closed	pins 1 & 2 closed
20MHz	pins 2 & 3 closed	pins 1 & 2 closed
25MHz	pins 1 & 2 closed	pins 2 & 3 closed
33MHz	pins 2 & 3 closed	pins 2 & 3 closed