


COMPUTREND SYSTEMS, INC.

MX-386/486 (MS-3132 VER. 1.0)

Processor	80386DX/CX486DLC
Processor Speed	33/40MHz
Chip Set	MXIC
Max. Onboard DRAM	32MB
SRAM Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	Auxillary keyboard connector
NPU Options	80387/CX387DLC

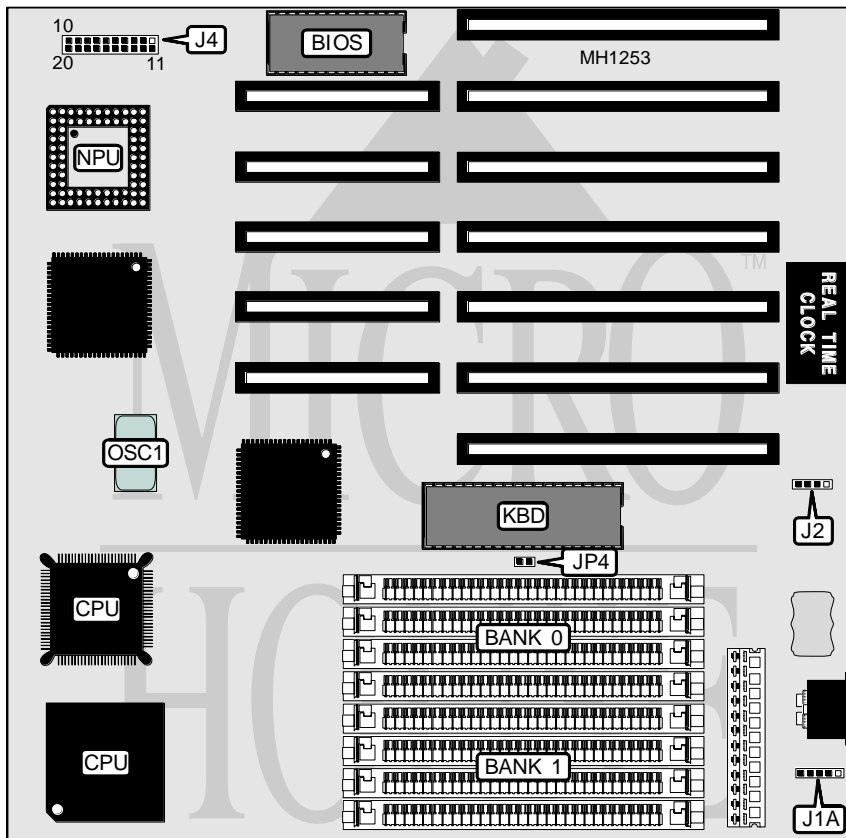

CONNECTIONS

Purpose	Location	Purpose	Location
Auxillary keyboard	J1A	Turbo LED	J4/12 & 13
External battery	J2	Turbo switch	J4/15 - 17
Power LED & keylock	J4/1 - 5	Reset switch	J4/19 & 20
Speaker	J4/7 - 10		

Continued on next page . . .

COMPUTREND SYSTEMS, INC.

MX-386/486 (MS-3132 VER. 1.0)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery select internal	J2	pins 2 & 3 closed
Battery select external	J2	Closed
í Monitor type select monochrome	JP4	Open
Monitor type select color	JP4	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9