


ACER, INC.

ISA486GLI MODEL I333A

Processor 80386DX/CX486DLC
Processor Speed 33/40MHz
Chip Set ALI
Max. Onboard DRAM 32MB
Cache 64/256KB
BIOS Acer
Dimensions 220mm x 240mm
I/O Options None
NPU Options 80387/CX387DLC

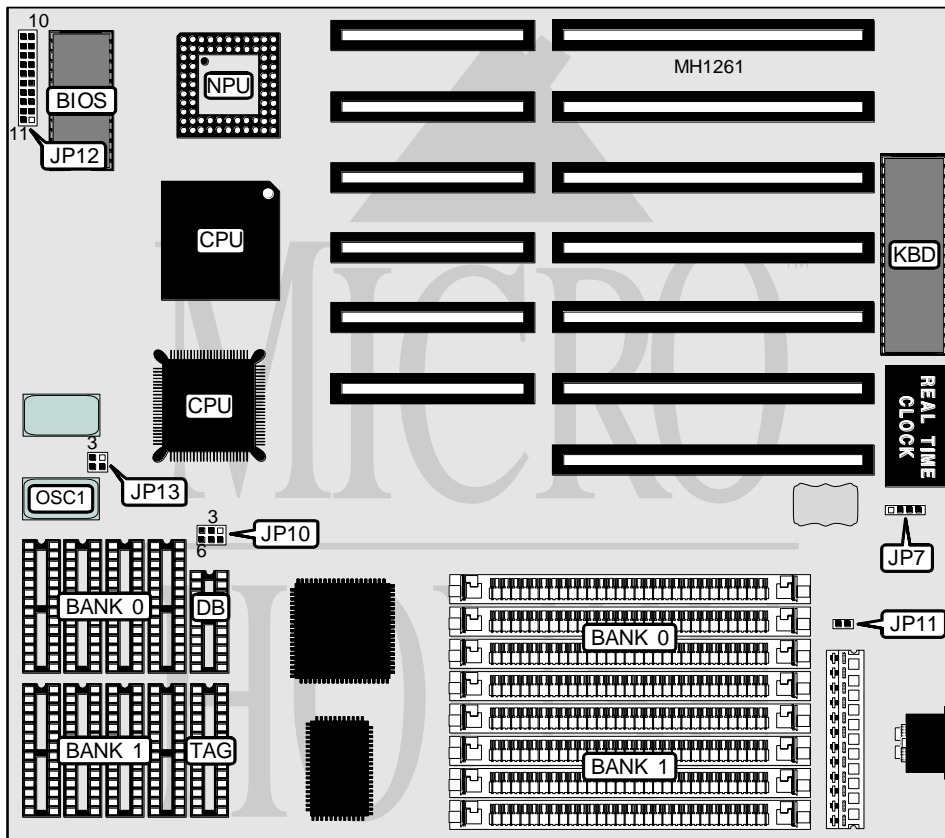

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP7	Turbo LED	JP12/12 & 13
Power LED & keylock	JP12/1 - 5	Turbo switch	JP12/15 - 17
Speaker	JP12/7 - 10	Reset switch	JP12/19 & 20

Continued on next page . . .

ACER, INC.

ISA486GLI MODEL I333A

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP11	open
CMOS memory clear	JP11	closed
CPU speed select 33MHz	JP13	pins 1 & 2 closed
CPU speed select 40MHz	JP13	pins 1 & 2 and 3 & 4 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

SRAM CONFIGURATION					
Size	Cache SRAM	Location	TAG	Dirty Bit (DB)	JP10
64KB	(8) 8K x 8	Banks 0 & 1	(1) 8K x 8	(1) 16K x 4	open
256KB	(8) 32K x 8	Banks 0 & 1	(1) 32K x 8	(1) 16K x 4	closed

Note: JP10 is closed by shorting pins 1 & 2, 3 & 4, and 5 & 6.