


# NIC TECHNOLOGY, INC.

## HLH386SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/25/33MHz
<b>Chip Set</b>	Headland
<b>Max. Onboard DRAM</b>	16MB
<b>SRAM Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

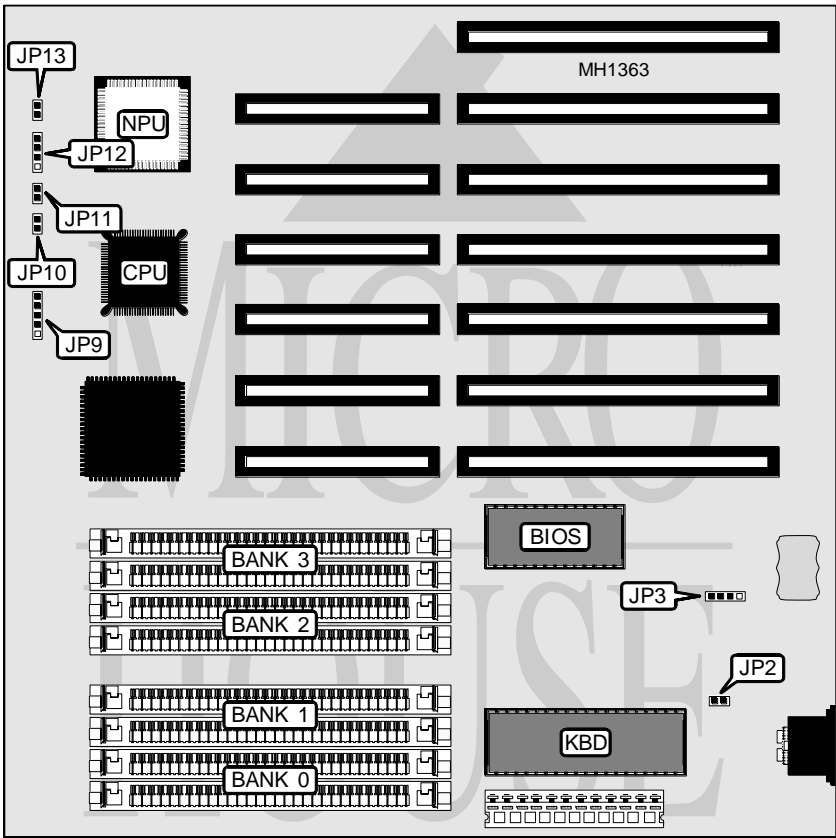

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP3	Turbo switch	JP11
Power LED & keylock	JP9	Speaker	JP12
Turbo LED	JP10	Reset switch	JP13

Continued on next page . . .

## NIC TECHNOLOGY, INC.

## HLH386SX

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	JP2	closed
Monitor type select monochrome	JP2	open

## DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE	NONE	NONE
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 4M x 9	(2) 1M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE