


# FORCOM TECHNOLOGY CORPORATION

## 80386SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20/25/33MHz
<b>Chip Set</b>	VLSI
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AWARD
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port
<b>NPU Options</b>	80387SX

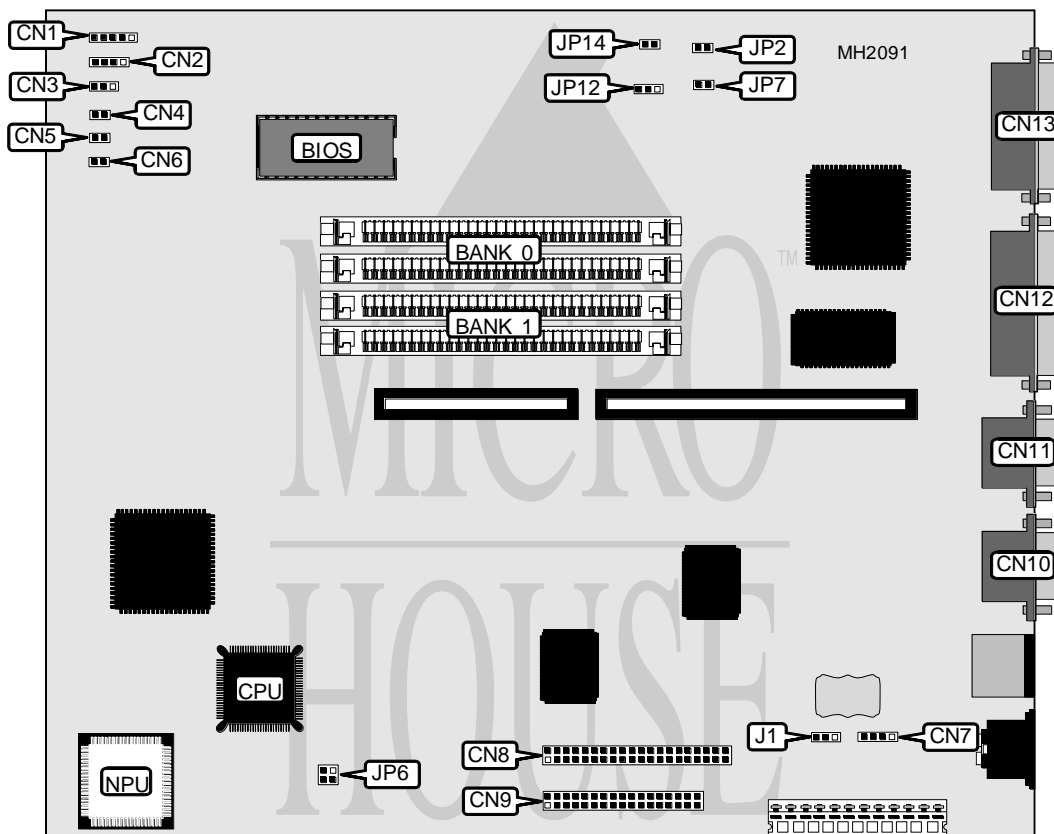

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	CN1	IDE interface	CN8
Speaker	CN2	Floppy drive interface	CN9
IDE interface LED	CN3	Serial port 2	CN10
Reset switch	CN4	Serial port 1	CN11
Turbo switch	CN5	Parallel port	CN12
Turbo LED	CN6	VGA port	CN13
External battery	CN7		

Continued on next page...

# FORCOM TECHNOLOGY CORPORATION

## 80386SX

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í On-board battery select	J1	pins 1 & 2 closed
External battery enabled	J1	pins 2 & 3 closed
í Monitor type select monochrome	JP2	Closed
Monitor type select color	JP2	Open
í CMOS normal operation	JP6	pins 1 & 2 closed
CMOS memory clear	JP6	pins 3 & 4 closed
Monitor in interlace mode	JP7	Closed
Monitor in non-interlace mode	JP7	Open
VGA display enabled	JP12	pins 2 & 3 closed
VGA display disabled	JP12	pins 1 & 2 closed
VESA monitor enabled	JP14	pins 1 & 2 closed
VGA monitor enabled	JP14	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9