


# JETPRO INFOTECH COMPANY, LTD.

## M B - 4 F 2

<b>Processor</b>	80386DX/CX486DLC/80486SX/80487SX/80486DX/80486DX2
<b>Processor Speed</b>	20/25/33/40/50(internal)/50/66(internal)MHz
<b>Chip Set</b>	FOREX
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/128/256KB
<b>BIOS</b>	AMI/AWARD
<b>Dimensions</b>	220.2mm x 250.2mm
<b>I/O Options</b>	32-bit local bus card slot
<b>NPU Options</b>	80387

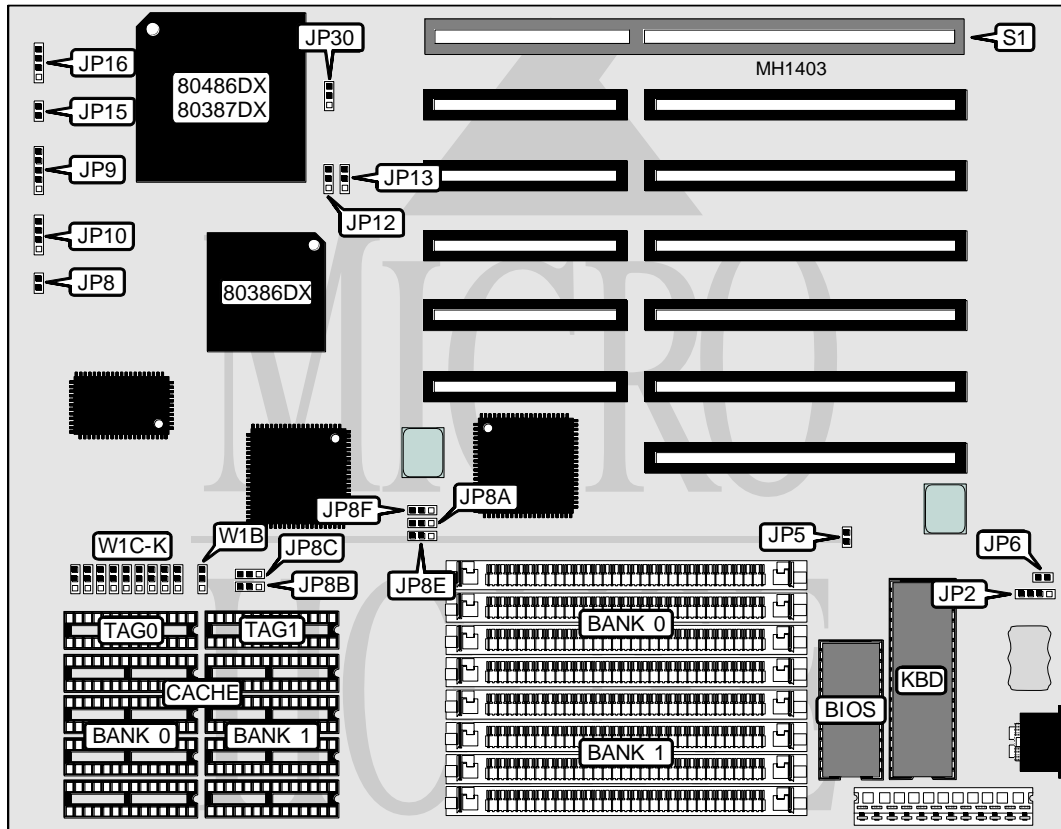

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Turbo switch	JP15
Reset switch	JP8	Turbo LED	JP16
Power LED & keylock	JP9	32-bit local bus card	S1
Speaker	JP10		

Continued on next page . . .

**JETPRO INFOTECH COMPANY, LTD.**  
**MB - 4 F 2**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal (internal battery)	JP2	pins 1 and 2 closed
CMOS memory normal (external battery)	JP2	connected
CMOS memory clear	JP2	open
í Factory configured - do not alter	JP5	closed
í Factory configured - do not alter	JP6	open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE CONFIGURATION					
CPU	JP12	JP13	JP30	W1B	W1C-K
80486DX2	pins 1 & 2	pins 1 & 2	pins 1 & 2	pins 1 & 2	pins 1 & 2
80486DX	pins 1 & 2	pins 1 & 2	pins 1 & 2	pins 1 & 2	pins 1 & 2
80487SX	pins 1 & 2	pins 1 & 2	pins 2 & 3	pins 1 & 2	pins 1 & 2
80486SX	pins 2 & 3	pins 2 & 3	pins 2 & 3	pins 1 & 2	pins 1 & 2
CX486DLC	N/A	N/A	N/A	pins 1 & 2	pins 2 & 3
80386DX	N/A	N/A	N/A	pins 2 & 3	pins 2 & 3

Note: Pins designated should be in the closed position.

CACHE CONFIGURATION				
Size	Cache CACHE	Location	TAG(0)	TAG(1)
64KB	(8) 8K x 8	Banks 0 & 1	(1) 8K x 8	NONE
128KB	(4) 32K x 8	Bank 0	(1) 8K x 8	NONE
256KB	(8) 32K x 8	Banks 0 & 1	(1) 8K x 8	(1) 8K x 8

CACHE JUMPER CONFIGURATION					
Size	JP8A	JP8B	JP8C	JP8E	JP8F
64KB	pins 2 & 3	pins 1 & 2	pins 1 & 2	pins 2 & 3	pins 1 & 2
128KB	pins 1 & 2	pins 2 & 3	pins 2 & 3	pins 1 & 2	pins 1 & 2
256KB	pins 2 & 3	pins 1 & 2	pins 1 & 2	pins 1 & 2	pins 2 & 3

Note: Pins designated should be in the closed position.