## **DELL COMPUTER CORPORATION** 4XX/M, 4XXS/M

80486SX/80486DX/80486DX2 **Processor Processor Speed** 25/33/50(internal)/66(internal)MHz

**Chip Set** LSI Max. Onboard DRAM 64MB

Cache 128KB (on external cache card)


**BIOS** Phoenix

**Dimensions** 330mm x 218mm

I/O Options Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA

feature connector, VGA port

**NPU Options** None

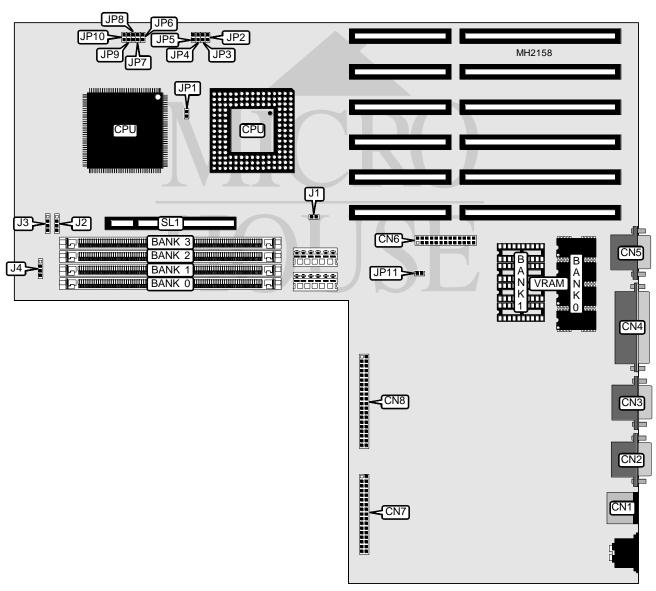

Continued on next page. . .

## **DELL COMPUTER CORPORATION** 4XX/M, 4XXS/M

. . . continued from previous page

CONNECTIONS				
Purpose	Location	Purpose	Location	
PS/2 mouse port	CN1	IDE interface	CN8	
Serial port 1	CN2	IDE interface LED	J1	
Serial port 2	CN3	Chassis fan power	J2	
Parallel port	CN4	External battery	J3	
VGA port	CN5	Front panel connector	J4	
VGA feature connector	CN6	External cache card slot	SL1	
Floppy drive interface	CN7			

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í External cache card not installed	JP1	Closed		
External cache card installed	JP1	Open		
í Password enabled	JP2	Closed		
Password disabled	JP2	Open		
í Factory configured - do not alter	JP3	Open		
í Flash BIOS write protect disabled	JP4	Closed		
Flash BIOS write protect enabled	JP4	Open		
í On board VGA enbled	JP5	Closed		
On board VGA disabled	JP5	Open		
í Factory configured - do not alter	JP6	Open		
í Factory configured - do not alter	JP7	Open		
í Factory configured - do not alter	JP10	Open		
í Factory configured - do not alter	JP11	Open		

		DRAM CONFIGURATION	N	
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 1M x 36	NONE	NONE	NONE
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	NONE	NONE	NONE
20MB	(1) 4M x 36	(1) 1M x 36	NONE	NONE
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	NONE
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
36MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	NONE
40MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
52MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36

Continued on next page. . .

## **DELL COMPUTER CORPORATION** 4XX/M, 4XXS/M

. . . continued from previous page

CPU SPEED CONFIGURATION				
Speed	JP8	JP9		
25MHz	Closed	Open		
33MHz	Open	Closed		
50iMHz	Closed	Open		
66iMHz	Open	Closed		

VIDEO MEMORY CONFIGURATION			
Size	Bank 0	Bank 1	
512KB	(4) 256K x 4	NONE	
1MB	(4) 256K x 4	(4) 256K x 4	
Note: Bank 0 is factory installed and is not configurable.			