


# WELLS AMERICAN CORPORATION COMPUSTAR II

**Processor** 80286  
**Processor Speed** 20MHz  
**Chip Set** C & T  
**Max. Onboard DRAM** 8MB  
**SRAM Cache** None  
**BIOS** Award/Wells American  
**Dimensions** 330mm x 127mm  
**I/O Options** Processor Interface Slot  
**NPU Options** 80287

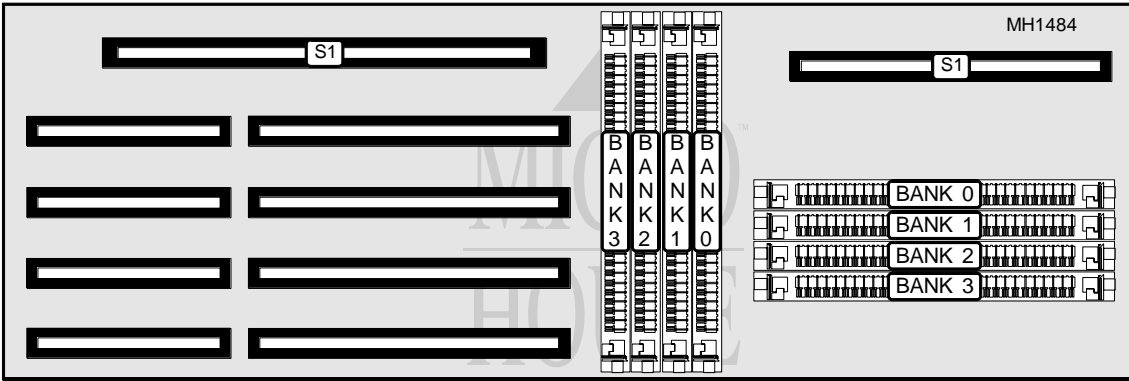

### CONNECTIONS

Purpose	Location
Processor Interface Slot	S1


### DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

Continued on next page . . .

# WELLS AMERICAN CORPORATION COMPUSTAR II

. . . continued from previous page

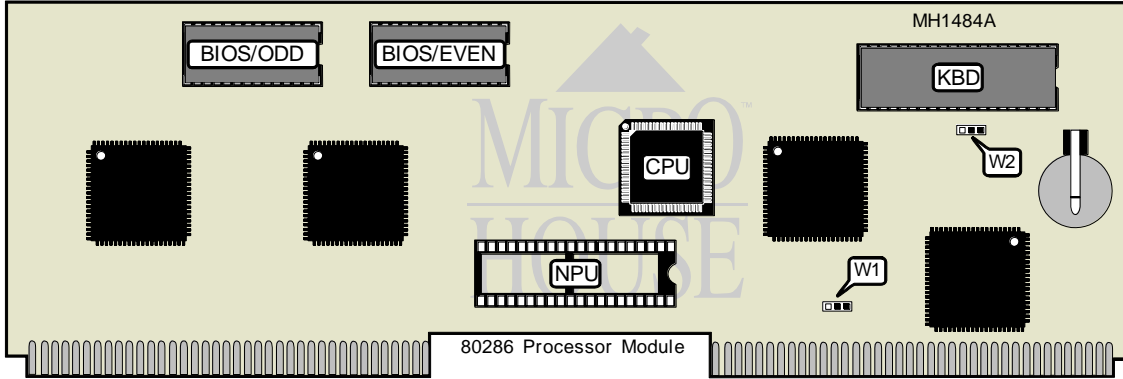

### USER CONFIGURABLE SETTINGS

Function	Jumper/Switch	Position
í IRQ12 select I/O channel	W1	pins 2 & 3 closed
IRQ12 select mouse port	W1	pins 1 & 2 closed
í Monitor type select color	W2	pins 2 & 3 closed
Monitor type select monochrome	W2	pins 1 & 2 closed