


# UNIDENTIFIED 80386 CACHE (ETE Q VERSION)

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	ETE Q
<b>Max. onboard DRAM</b>	32MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX/3167

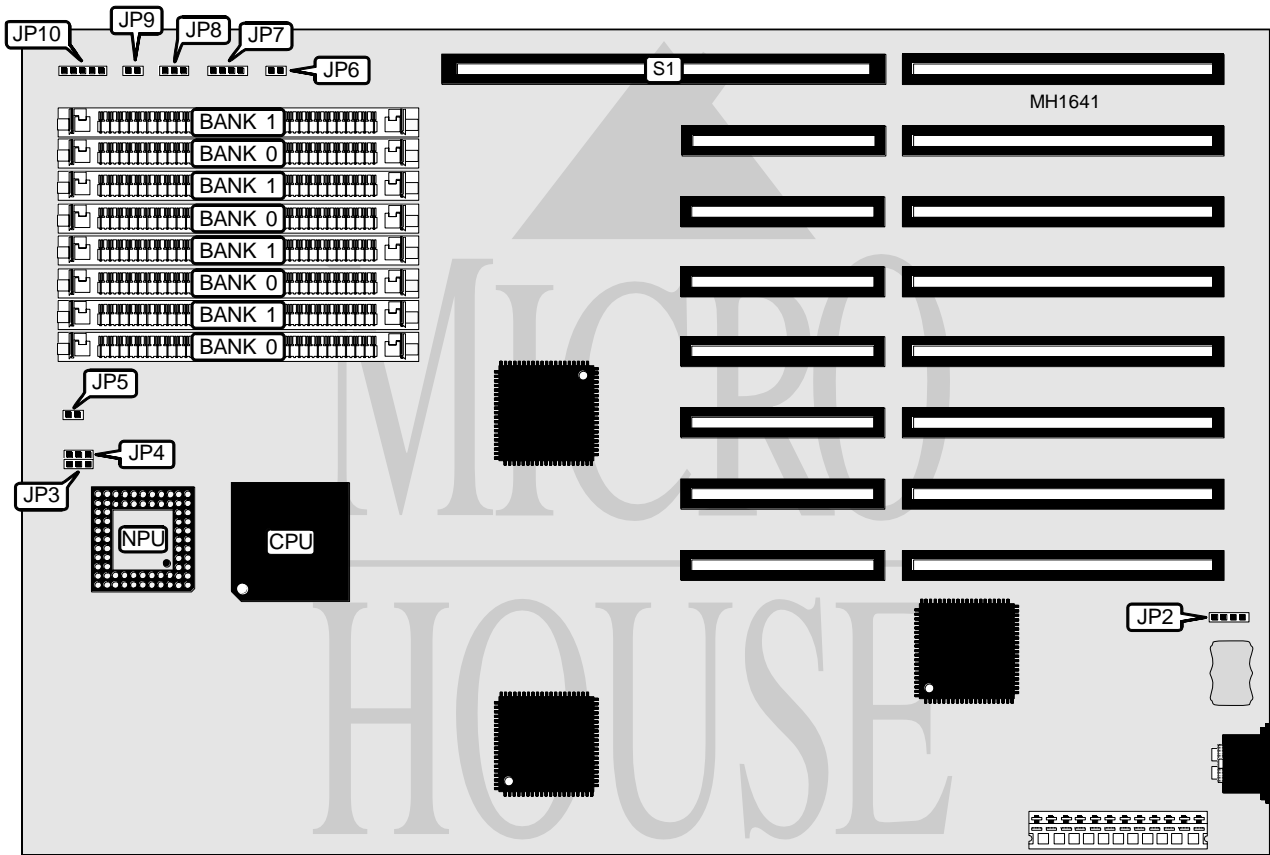

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Turbo Switch	JP8
Reset switch	JP6	Turbo LED	JP9
Speaker	JP7	Power LED & keylock	JP10

Continued on next page . . .

# UNIDENTIFIED

## 80386 CACHE (ETEQ VERSION)

... continued from previous page

### USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	JP2	pins 1 & 2 closed
Monitor type select monochrome	JP2	pins 2 & 3 closed
í NPU type select Weitek or none	JP5	Closed
NPU type select 80387DX	JP5	Open

### DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4MB x 9	NONE
32MB	(4) 4MB x 9	(4) 4MB x 9

### NPU CONFIGURATION

Mode	JP3	JP4
Synchronous	pins 1 & 2 closed	pins 1 & 2 closed
Asynchronous	pins 2 & 3 closed	pins 2 & 3 closed