


J-MARK COMPUTER CORPORATION 386DX 25/40 NON CACHE

Processor 80386DX
Processor Speed 25/40MHz
Chip Set CGS
Max. Onboard DRAM 32MB
Cache None
BIOS AMI
Dimensions 220mm x 220mm
I/O Options None
NPU Options 80387DX/3167

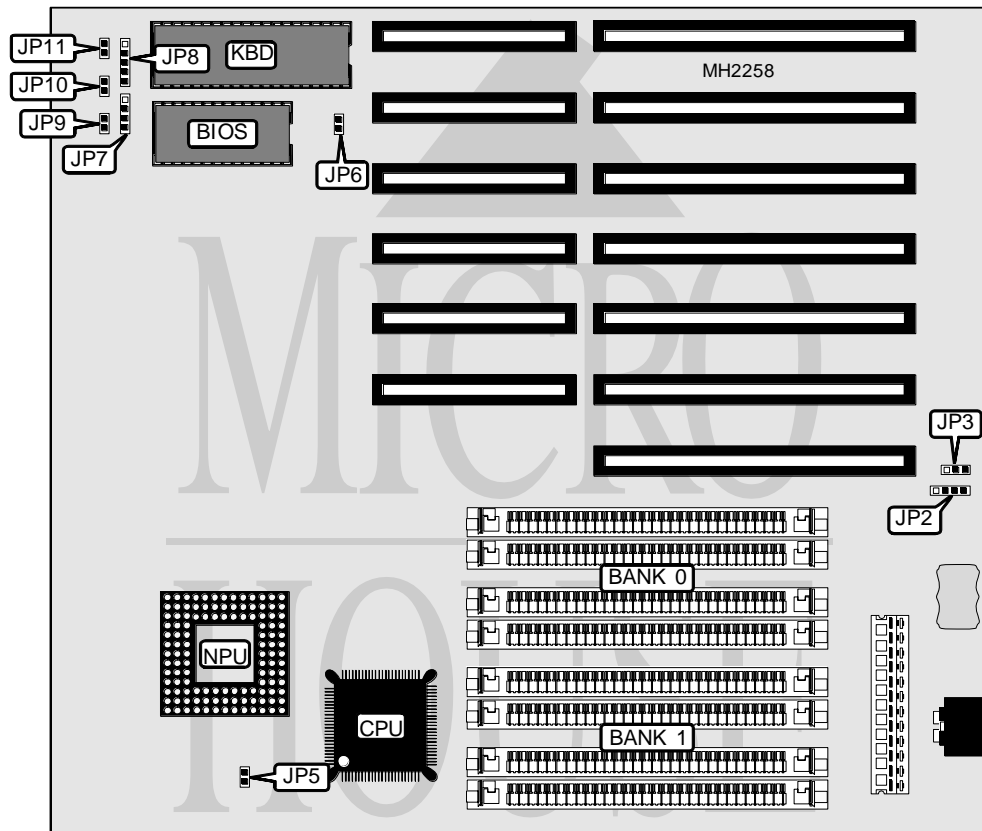

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Reset switch	JP9
Speaker	JP7	Turbo switch	JP10
Power LED & keylock	JP8	Turbo LED	JP11

Continued next page. . .

J-MARK COMPUTER CORPORATION

386DX 25/40 NON CACHE

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP3	pins 1 & 2 closed
CMOS memory clear	JP3	pins 2 & 3 closed
í NPU synchronous with CPU	JP5	Open
NPU asynchronous with CPU	JP5	Closed
í Monitor type select color	JP6	Closed
Monitor type select monochrome	JP6	Open
í Turbo switch enabled	JP10	Closed
Turbo switch disabled	JP10	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9