


# MICROMEDIA TECHNOLOGIES, INC.

## 386 - A S

<b>Processor</b>	80386SX/CX486XLC
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	ALI
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	290mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

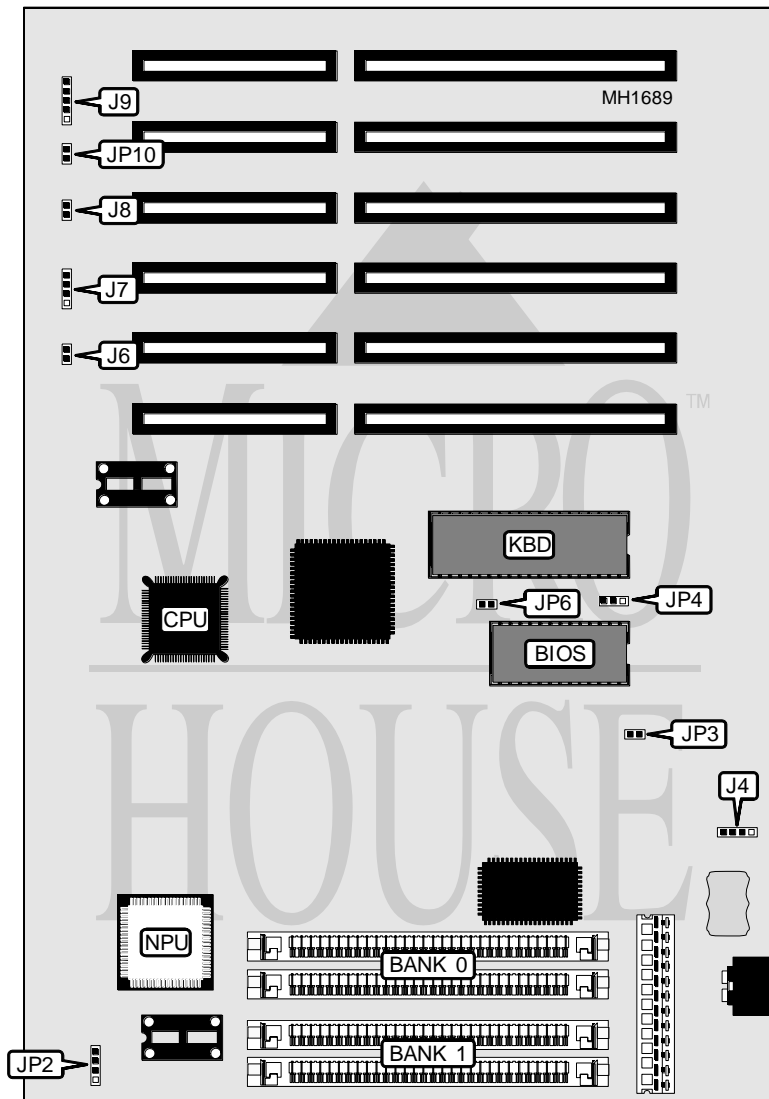

Continued on next page . . .

MICROMEDIA TECHNOLOGIES, INC.  
386 - A S

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo LED	J8
Reset switch	J6	Power LED & keylock	J9
Speaker	J7	Turbo switch	JP10

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í NPU synchronous with CPU	JP2	pins 1 & 2 closed
NPU asynchronous	JP2	pins 2 & 3 closed
í CMOS memory normal operation	JP3	Open
CMOS memory clear	JP3	Closed
í Monitor type select color	JP4	pins 2 & 3 closed
Monitor type select monochrome	JP4	pins 1 & 2 closed
í Hardware parity check enabled	JP6	Closed
Hardware parity check disabled	JP6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9