


# LEADING EDGE PRODUCTS, INC. MODEL D (REVISION CC1/CC2)

<b>Processor</b>	8088 (exact location unknown)
<b>Processor Speed</b>	4.77/7.16MHz
<b>Chip Set</b>	Unknown
<b>Max. Onboard DRAM</b>	640KB
<b>Cache</b>	None
<b>BIOS</b>	Unknown
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	Floppy drive interface, parallel port, serial port, VGA port
<b>NPU Options</b>	8087

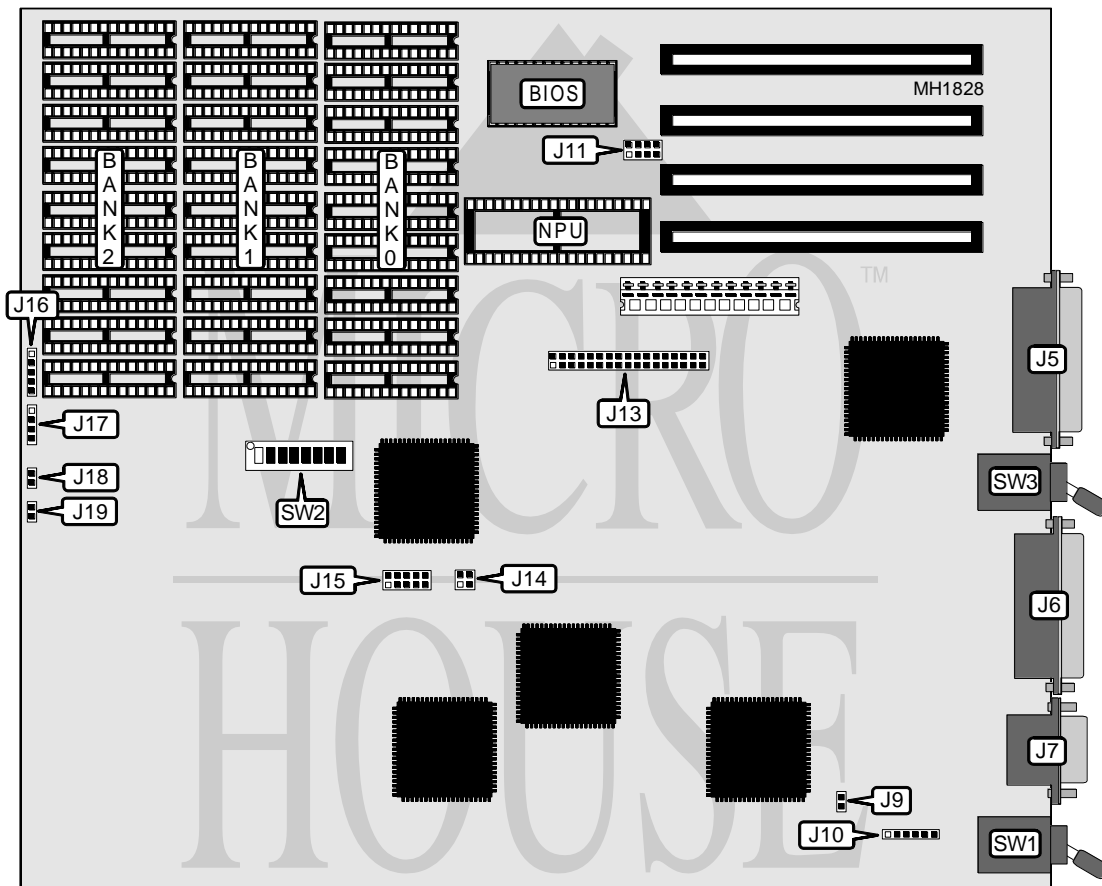

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	J5	Keyboard	J16
Serial port	J6	Speaker	J17
VGA port	J7	Reset switch	J18
Light pen port	J10	Power-on LED indicator	J19
Floppy drive interface	J13		

Continued next page...

# LEADING EDGE PRODUCTS, INC. MODEL D (REVISION CC1/CC2)

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	J8	N/A
í Monitor enabled	J9	Closed
Monitor disabled	J9	Open
í Factory configured - do not alter	J15	open
í Real time clock enabled	J15	pins 1 & 6 closed
Real time clock disabled	J15	pins 2 & 7 closed
í Parallel port enabled	J15	pins 2 & 7 open
Parallel port disabled	J15	pins 3 & 8 closed
í Floppy drive interface enabled	J15	pins 3 & 8 open
Floppy drive interface disabled	J15	pins 4 & 9 closed
í Serial port enabled	J15	pins 4 & 9 open
Serial port disabled	J15	pins 5 & 10 closed
í Video mode TTL monochrome	SW1	pins 5 & 10 open
Video mode CGA	SW1	Down
í Factory configured - do not alter	SW2/switch 1	Off
í NPU disabled	SW2/switch 2	On
NPU enabled	SW2/switch 2	Off
í Factory configured - do not alter	SW2/switch 3	On
í Memory test 64KB	SW2/switch 4	On
Memory test all	SW2/switch 4	Off
í Factory configured - do not alter	SW2/switch 5	Off
í Factory configured - do not alter	SW2/switch 6	Off
Note: The exact location of J8 is unknown.		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	J14
512KB	(9) 4164	(9) 4164	NONE	pins 2 & 3 closed
640KB	(9) 41256	(9) 41256	(9) 41128	pins 1 & 2 closed

CPU SPEED CONFIGURARION	
Speed	SW3
4.77MHz	Down
7.16MHz	Up

FLOPPY DISK DRIVES INSTALLED		
Number of Drives	SW2/switch 7	SW2/switch 8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

Continued next page...

---

LEADING EDGE PRODUCTS, INC.  
MODEL D (REVISION CC1/CC2)

... continued from previous page.

REAL TIME CLOCK INTERRUPT SELECT	
IRQ	J11
2	pins 1 & 5 closed
4	pins 2 & 6 closed
5	pins 3 & 7 closed
7	pins 4 & 8 closed