


IBM CORPORATION PS/VALUEPOINT 6384 425SX

Processor	80486SX
Processor Speed	25MHz
Chip Set	Intel
Max. Onboard DRAM	32MB
Cache	8KB
BIOS	IBM
Dimensions	330mm x 218mm
I/O Options	32-bit riser card slot, floppy drive interface, hard drive interface, parallel port, PS/2 mouse port, serial ports (2), video port
NPU Options	None

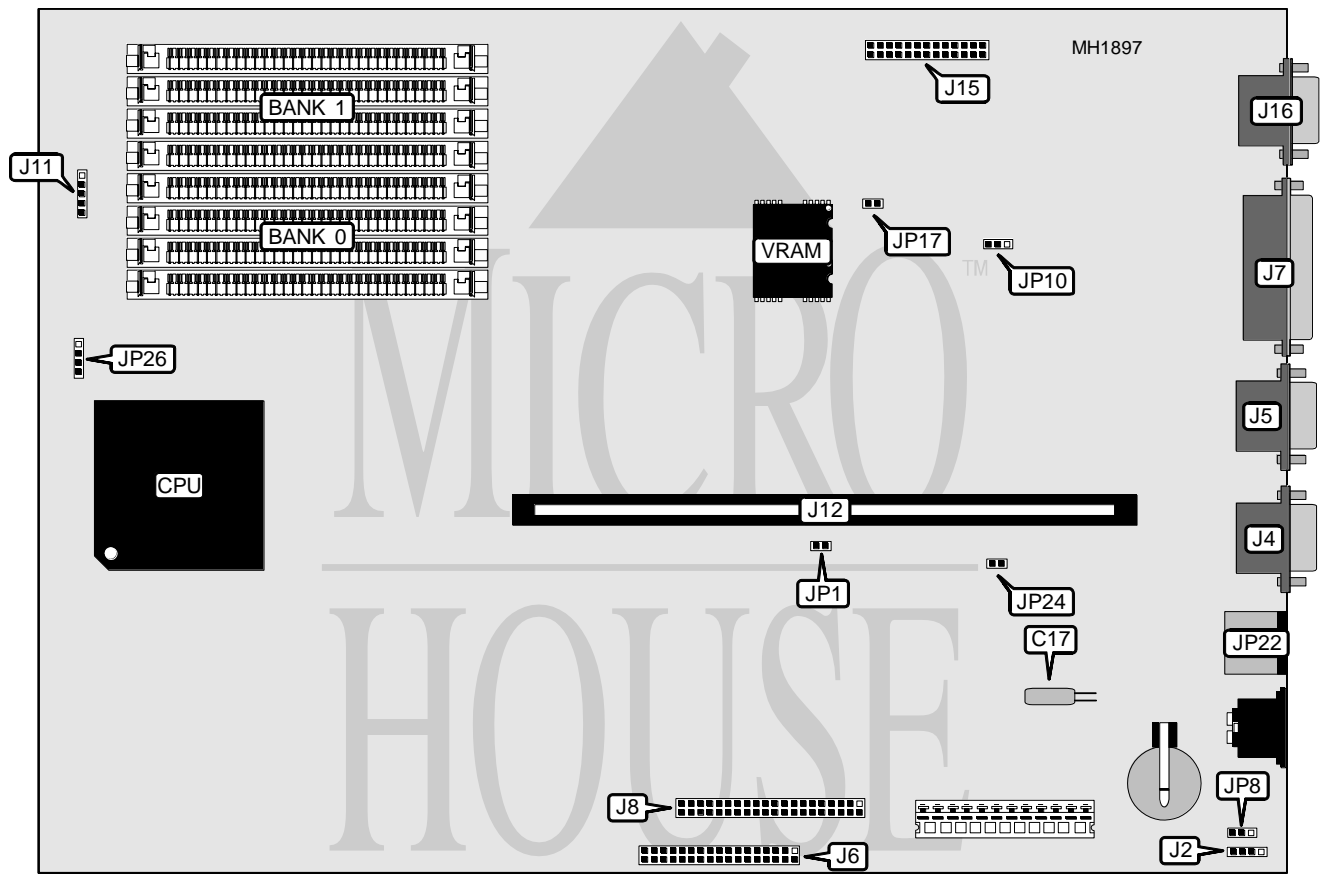

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Power on LED	J11 pins 1 & 2
Serial port 1	J4	Riser card slot	J12
Serial port 2	J5	Vesa feature connector	J15
Floppy drive interface	J6	Video port	J16
Parallel port	J7	Power LED	J23
Hard drive interface	J8	PS/2 mouse port	JP22
Hard drive LED	J11 pins 4 & 5		

Continued next page...

IBM CORPORATION

PS/VALUEPOINT 6384 425SX

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í IRQ9 enabled	JP1	Closed
IRQ9 disabled	JP1	Open
í CMOS memory normal operation	JP8	pins 1 & 2 closed
CMOS memory clear	JP8	pins 2 & 3 closed
í Mouse port enabled	JP24	Closed
Mouse port disabled	JP24	Open
í Beeper enabled	JP26	pins 1 & 2 closed
Beeper disabled	JP26	pins 3 & 4 closed

Note: The capacitor located at C17 must be use in conjunction with JP8 to erase the password.

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(4) 1M x 9	None
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(1) 4M x 9	None
32MB	(1) 4M x 9	(1) 4M x 9

VIDEO CONFIGURATION		
Port	JP10	JP17
í Enabled	pins 2 & 3 closed	Open
Disabled	pins 1 & 2 closed	Closed