


TULIP COMPUTERS

TR 586 EISA (VER. 1) (TC37)

Processor	Pentium Overdrive
Processor Speed	60/66MHz
Chip Set	Texas Instruments
Max. Onboard DRAM	128MB
Cache	256KB
BIOS	Phoenix
Dimensions	355mm x 304mm
I/O Options	Floppy drive interface, IDE interfaces (2), internal video board connector, parallel port, SCSI ports (3), serial ports (2)
NPU Options	None

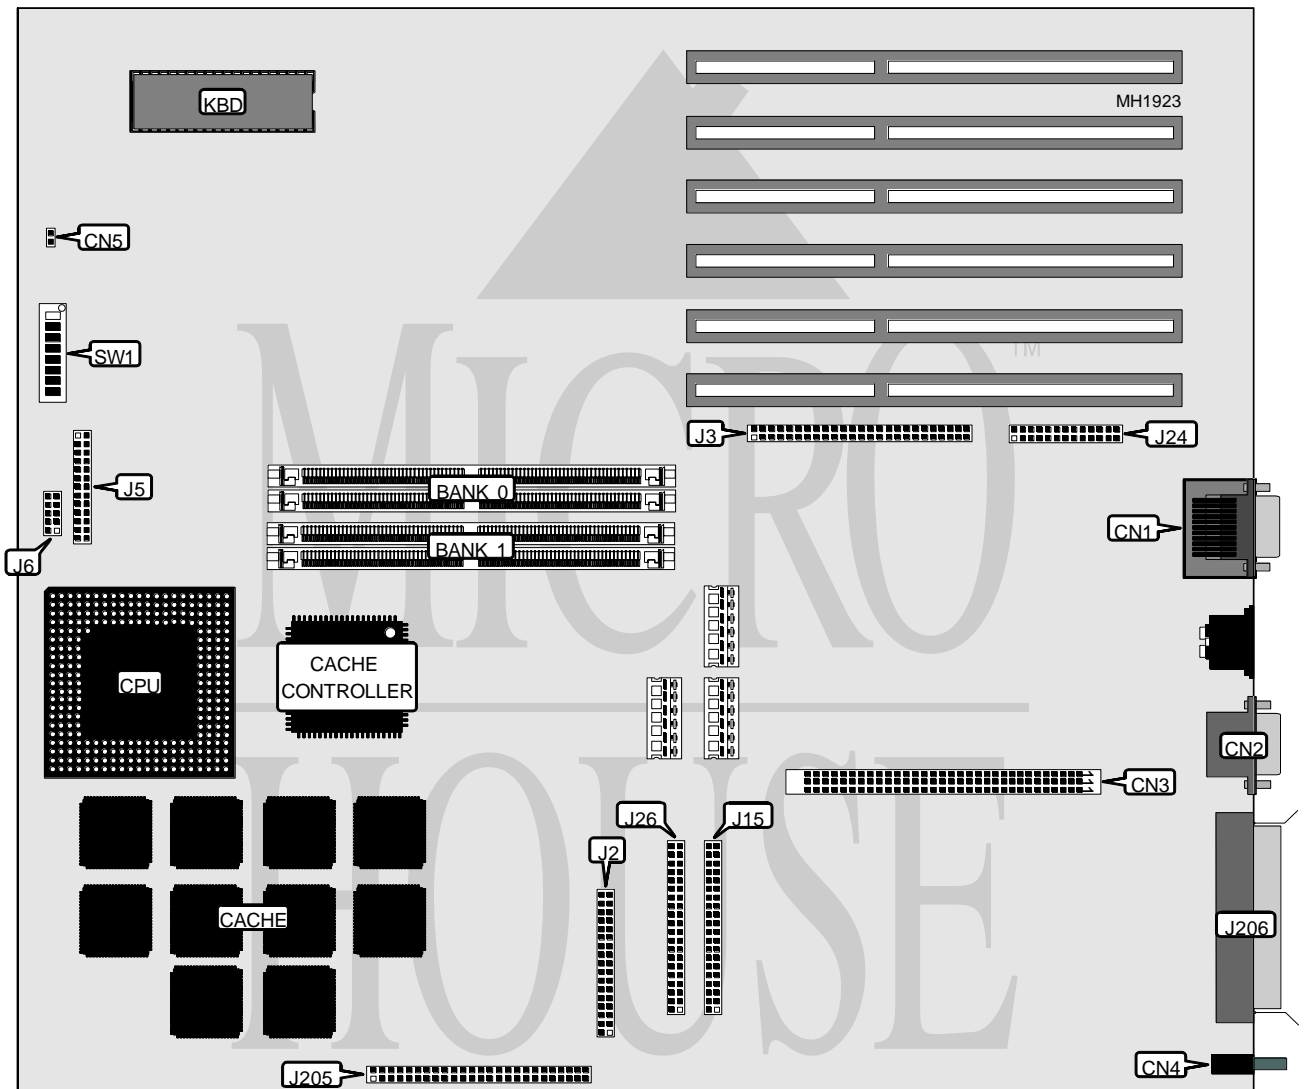

Continued on next page. . .

TULIP COMPUTERS

TR 586 EISA (VER. 1) (TC37)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial ports 1 & 2	CN1	Battery/speaker/power on LED	J6
VGA port	CN2	Primary IDE interface	J15
Internal video board connector	CN3	Parallel port	J24
UPS connector	CN4	Secondary IDE interface	J26
Chassis fan power	CN5	Internal SCSI connector	J205
Floppy drive interface	J2	External SCSI connector	J206

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/5	Off
í Factory configured - do not alter	SW1/6	On
í Factory configured - do not alter	SW1/7	On
í Factory configured - do not alter	SW1/8	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	NONE
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 1M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 1M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36

DRAM SWITCH CONFIGURATION				
Size	SW1/1	SW1/2	SW1/3	SW1/4
8MB	Off	On	On	On
16MB	On	Off	On	On
24MB	Off	Off	On	On
32MB	On	Off	Off	On
40MB	On	On	Off	On
64MB	Off	Off	Off	On
72MB	Off	On	Off	On
96MB	On	On	On	Off
128MB	Off	On	On	Off