


ROBOTECH, INC. G M B - 4 8 6 U N P

Processor	CX486S/SL80486SX/80486SX/AM486DX-PLUS/AM486DXL/CX486DX/SL80486DX/80486DX/AM486DX2-PLUS/AM486DXL2/CX486DX2/SL80486DX2/80486DX2/80486DX4/P24D/ Pentium Overdrive
Processor Speed	20/25/33/40/50(internal)/50/66(internal)/75(internal)/100(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	128MB
Cache	128/256/512KB
BIOS	Award
Dimensions	260mm x 220mm
I/O Options	32-bit VESA local bus slots (3), green PC connector
NPU Options	None

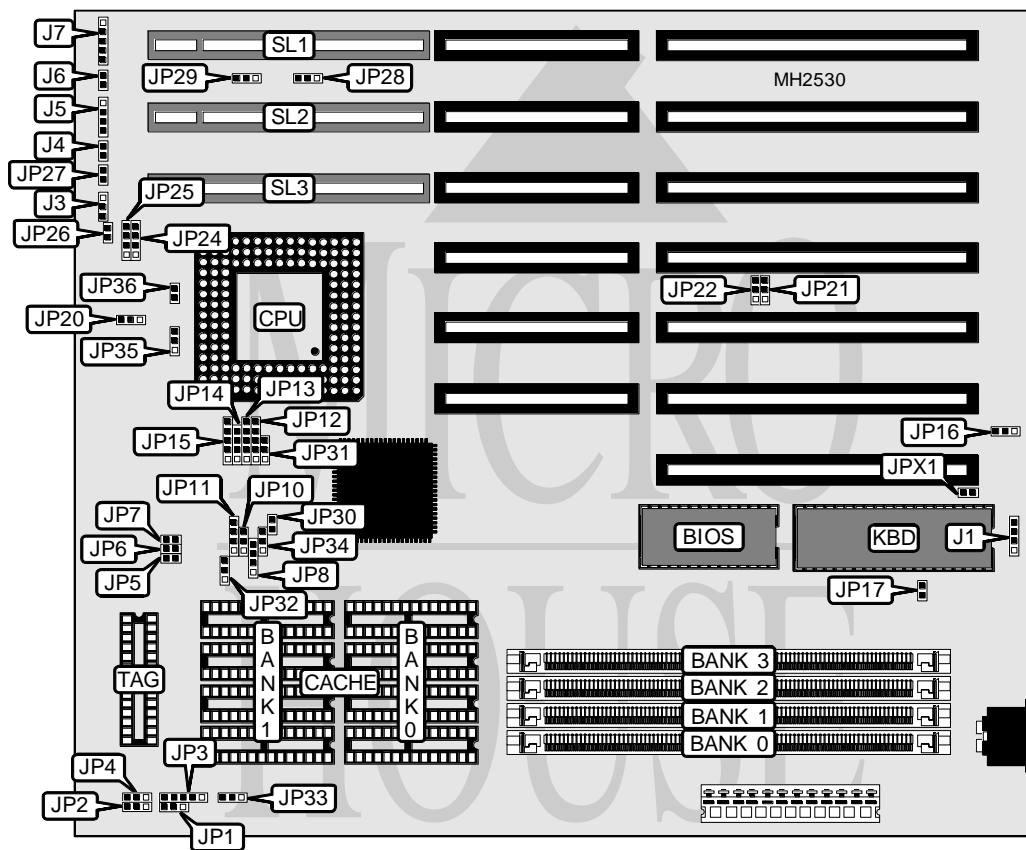

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Reset switch	J6
Turbo switch	J3	Power LED & keylock	J7
Turbo LED	J4	Green PC connector	JP27
Speaker	J5	32-bit VESA local bus slots	SL1 - SL3

Continued on next page...

ROBOTECH, INC.

GMB-486UNP

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
1 CMOS memory normal operation	JP16	pins 2 & 3 closed
CMOS memory clear	JP16	pins 1 & 2 closed
1 Monitor type select monochrome/EGA/VGA	JP17	Open
Monitor type select EGA	JP17	Closed
1 CPU clock delay select CLKIN delay for CPUCLK	JP20	pins 2 & 3 closed
CPU clock delay select CLKIN and CPUCLK same phase	JP20	pins 1 & 2 closed
1 Green PC break switch enabled	JP26	Open
Green PC break switch disabled	JP26	Closed
1 Factory configured - do not alter	JP32	pins 1 & 2 closed
1 Factory configured - do not alter	JP35	pins 2 & 3 closed
1 Keyboard controller clock select asynchronous	JPX1	Open
Keyboard controller clock select synchronous	JPX1	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	NONE	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE	NONE
2MB	(1) 512K x 36	NONE	NONE	NONE
4MB	(1) 256K x 36	(1) 256K x 36	(1) 512K x 36	NONE
4MB	(1) 512K x 36	(1) 512K x 36	NONE	NONE
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 256K x 36	(1) 1M x 36	NONE	NONE
6MB	(1) 256K x 36	(1) 256K x 36	(1) 1M x 36	NONE
6MB	(1) 512K x 36	(1) 1M x 36	NONE	NONE
8MB	(1) 256K x 36	(1) 256K x 36	(1) 512K x 36	(1) 1M x 36
8MB	(1) 512K x 36	(1) 512K x 36	(1) 1M x 36	NONE
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
8MB	(1) 2M x 36	NONE	NONE	NONE
10MB	(1) 256K x 36	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36
12MB	(1) 512K x 36	(1) 512K x 36	(1) 1M x 36	(1) 1M x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
12MB	(1) 1M x 36	(1) 2M x 36	NONE	NONE
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 2M x 36	(1) 2M x 36	NONE	NONE
16MB	(1) 4M x 36	NONE	NONE	NONE
16MB	(1) 1M x 36	(1) 1M x 36	(1) 2M x 36	NONE
17MB	(1) 256K x 36	(1) 4M x 36	NONE	NONE
18MB	(1) 256K x 36	(1) 256K x 36	(1) 4M x 36	NONE
18MB	(1) 512K x 36	(1) 4M x 36	NONE	NONE
20MB	(1) 512K x 36	(1) 512K x 36	(1) 4M x 36	NONE
20MB	(1) 1M x 36	(1) 4M x 36	NONE	NONE
20MB	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36	NONE
24MB	(1) 512K x 36	(1) 512K x 36	(1) 1M x 36	(1) 4M x 36
24MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	NONE

Continued on next page...

ROBOTECH, INC.

GMB-486UNP

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
24MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	NONE
24MB	(1) 1M x 36	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36
24MB	(1) 2M x 36	(1) 4M x 36	NONE	NONE
28MB	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
32MB	(1) 8M x 36	NONE	NONE	NONE
32MB	(1) 2M x 36	(1) 2M x 36	(1) 4M x 36	NONE
32MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
36MB	(1) 512K x 36	(1) 512K x 36	(1) 4M x 36	(1) 4M x 36
36MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	NONE
36MB	(1) 1M x 36	(1) 8M x 36	NONE	NONE
40MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36
40MB	(1) 1M x 36	(1) 1M x 36	(1) 8M x 36	NONE
40MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	(1) 4M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
48MB	(1) 4M x 36	(1) 8M x 36	NONE	NONE
48MB	(1) 2M x 36	(1) 2M x 36	(1) 4M x 36	(1) 4M x 36
48MB	(1) 2M x 36	(1) 2M x 36	(1) 8M x 36	NONE
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
64MB	(1) 16M x 36	NONE	NONE	NONE
64MB	(1) 4M x 36	(1) 4M x 36	(1) 8M x 36	NONE
64MB	(1) 8M x 36	(1) 8M x 36	NONE	NONE
65MB	(1) 256K x 36	(1) 16M x 36	NONE	NONE
68MB	(1) 1M x 36	(1) 16M x 36	NONE	NONE
68MB	(1) 1M x 36	(1) 8M x 36	(1) 8M x 36	NONE
72MB	(1) 1M x 36	(1) 1M x 36	(1) 16M x 36	NONE
72MB	(1) 1M x 36	(1) 1M x 36	(1) 8M x 36	(1) 8M x 36
80MB	(1) 4M x 36	(1) 16M x 36	NONE	NONE
80MB	(1) 4M x 36	(1) 8M x 36	(1) 8M x 36	NONE
80MB	(1) 2M x 36	(1) 2M x 36	(1) 8M x 36	(1) 8M x 36
96MB	(1) 4M x 36	(1) 4M x 36	(1) 16M x 36	NONE
96MB	(1) 4M x 36	(1) 4M x 36	(1) 8M x 36	(1) 8M x 36
96MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	NONE
128MB	(1) 16M x 36	(1) 16M x 36	NONE	NONE
128MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8
256KB	(4) 64K x 8	NONE	(1) 32K x 8
512KB	(4) 128K x 8	NONE	(1) 32K x 8

Continued on next page...

ROBOTECH, INC.

GMB-486UNP

... continued from previous page

CACHE JUMPER CONFIGURATION

Size	JP1	JP2	JP3	JP4	JP33
128KB	1 & 2	1 & 2	1 & 2, 3 & 4	1 & 2	2 & 3
256KB	2 & 3	2 & 3	2 & 3, 4 & 5	1 & 2	2 & 3
256KB	1 & 2	2 & 3	1 & 2, 3 & 4	1 & 2	1 & 2
512KB	1 & 2	2 & 3	1 & 2, 3 & 4	2 & 3	2 & 3

Note: Pins designated should be in the closed position.

CPU TYPE CONFIGURATION

Type	JP8	JP10	JP11	JP12	JP13
CX486S	2 & 3	2 & 3	Open	2 & 3, 4 & 5	Open
SL80486SX	2 & 3	2 & 3	Open	3 & 4	1 & 2
80486SX	2 & 3	2 & 3	Open	Open	Open
AM486DX-PLUS	1 & 2, 3 & 4	2 & 3	3 & 4	3 & 4	4 & 5
AM486DXL	1 & 2, 3 & 4	2 & 3	1 & 2, 3 & 4	Open	Open
CX486DX	1 & 2, 3 & 4	2 & 3	3 & 4	2 & 3	Open
SL80486DX	1 & 2, 3 & 4	2 & 3	3 & 4	3 & 4	1 & 2
80486DX	1 & 2, 3 & 4	2 & 3	3 & 4	Open	Open
AM486DX2-PLUS	1 & 2, 3 & 4	2 & 3	3 & 4	3 & 4	4 & 5
AM486DXL2	1 & 2, 3 & 4	2 & 3	1 & 2, 3 & 4	Open	Open
CX486DX2	1 & 2, 3 & 4	2 & 3	3 & 4	2 & 3	Open
SL80486DX2	1 & 2, 3 & 4	2 & 3	3 & 4	3 & 4	1 & 2
80486DX2	1 & 2, 3 & 4	2 & 3	3 & 4	Open	Open
80486DX4	1 & 2, 3 & 4	2 & 3	3 & 4	3 & 4	1 & 2
P24D	1 & 2, 3 & 4	1 & 2	3 & 4	1 & 2, 3 & 4	2 & 3
Pentium Overdrive	1 & 2, 3 & 4	1 & 2	2 & 3	3 & 4	Open

Note: Pins designated should be in the closed position.

CPU TYPE CONFIGURATION (CON'T)

Type	JP14	JP15	JP21	JP22	JP24
CX486S	1 & 2, 3 & 4	2 & 3	1 & 2	2 & 3	2 & 3
SL80486SX	2 & 3	4 & 5	2 & 3	1 & 2	Open
80486SX	Open	Open	2 & 3	1 & 2	Open
AM486DX-PLUS	2 & 3	4 & 5	1 & 2	1 & 2	Open
AM486DXL	Open	Open	1 & 2	2 & 3	3 & 4
CX486DX	1 & 2	2 & 3	1 & 2	2 & 3	2 & 3
SL80486DX	2 & 3	4 & 5	2 & 3	1 & 2	Open
80486DX	Open	Open	2 & 3	1 & 2	Open
AM486DX2-PLUS	2 & 3	4 & 5	1 & 2	1 & 2	Open
AM486DXL2	Open	Open	1 & 2	2 & 3	3 & 4
CX486DX2	1 & 2	2 & 3	1 & 2	2 & 3	2 & 3
SL80486DX2	2 & 3	4 & 5	2 & 3	1 & 2	Open
80486DX2	Open	Open	2 & 3	1 & 2	Open
80486DX4	2 & 3	4 & 5	2 & 3	1 & 2	Open
P24D	2 & 3	4 & 5	1 & 2	1 & 2	Open
Pentium Overdrive	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page. . .

ROBOTECH, INC.

GMB-486UNP

... continued from previous page

CPU TYPE CONFIGURATION (CON'T)					
Type	JP25	JP30	JP31	JP34	JP36
CX486S	2 & 3	Open	Open	1 & 2	Closed
SL80486SX	Open	Open	Open	1 & 2	Closed
80486SX	Open	Open	Open	Open	Closed
AM486DX-PLUS	1 & 2	Open	2 & 3	1 & 2	Closed
AM486DXL	Open	Open	Open	2 & 3	Closed
CX486DX	2 & 3	Open	Open	1 & 2	Closed
SL80486DX	Open	Open	Open	1 & 2	Closed
80486DX	Open	Open	Open	Open	Closed
AM486DX2-PLUS	1 & 2	Open	2 & 3	1 & 2	Closed
AM486DXL2	Open	Open	Open	2 & 3	Closed
CX486DX2	2 & 3	Open	Open	1 & 2	Closed
SL80486DX2	Open	Open	Open	1 & 2	Closed
80486DX2	Open	Open	Open	Open	Closed
80486DX4	3 & 4	Open	Open	1 & 2	Open
P24D	1 & 2	Closed	1 & 2	1 & 2	Closed
Pentium Overdrive	1 & 2	Open	Open	1 & 2	Closed

Note: Pins designated should be in the closed position.

CPU SPEED CONFIGURATION (AV9107)			
Speed	JP5	JP6	JP7
20MHz	Closed	Open	Closed
25MHz	Closed	Closed	Open
33MHz	Open	Closed	Closed
40MHz	Closed	Open	Open
50iMHz	Closed	Closed	Open
50MHz	Open	Open	Closed
66iMHz	Open	Closed	Closed
75iMHz	Closed	Closed	Open
100iMHz	Open	Closed	Closed

CPU SPEED CONFIGURATION (MX-8315)			
Speed	JP5	JP6	JP7
20MHz	Open	Open	Open
25MHz	Open	Closed	Open
33MHz	Closed	Closed	Closed
40MHz	Open	Closed	Closed
50iMHz	Open	Closed	Open
50MHz	Closed	Open	Open
66iMHz	Closed	Closed	Closed
75iMHz	Open	Closed	Open
100iMHz	Closed	Closed	Closed

Continued on next page. . .

ROBOTECH, INC.
G M B - 4 8 6 U N P*... continued from previous page*

VESA WAIT STATE CONFIGURATION	
Wait states	JP28
0 wait states	pins 1 & 2 closed
1 wait state	pins 2 & 3 closed

BUS SPEED CONFIGURATION	
CPU speed	JP29
<= 33MHz	pins 1 & 2 closed
> 33MHz	pins 2 & 3 closed