


DELL COMPUTER CORPORATION

SYSTEM V486/XX MDT

| | |
|--------------------------|---|
| Processor | 80486SX/80487SX/80486DX/80486DX2 |
| Processor Speed | 25/33/50(internal)/66(internal)MHz |
| Chip Set | Headland |
| Max. Onboard DRAM | 64MB |
| Cache | None |
| BIOS | Unidentified |
| Dimensions | 330mm x 218mm |
| I/O Options | Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port |
| NPU Options | None |

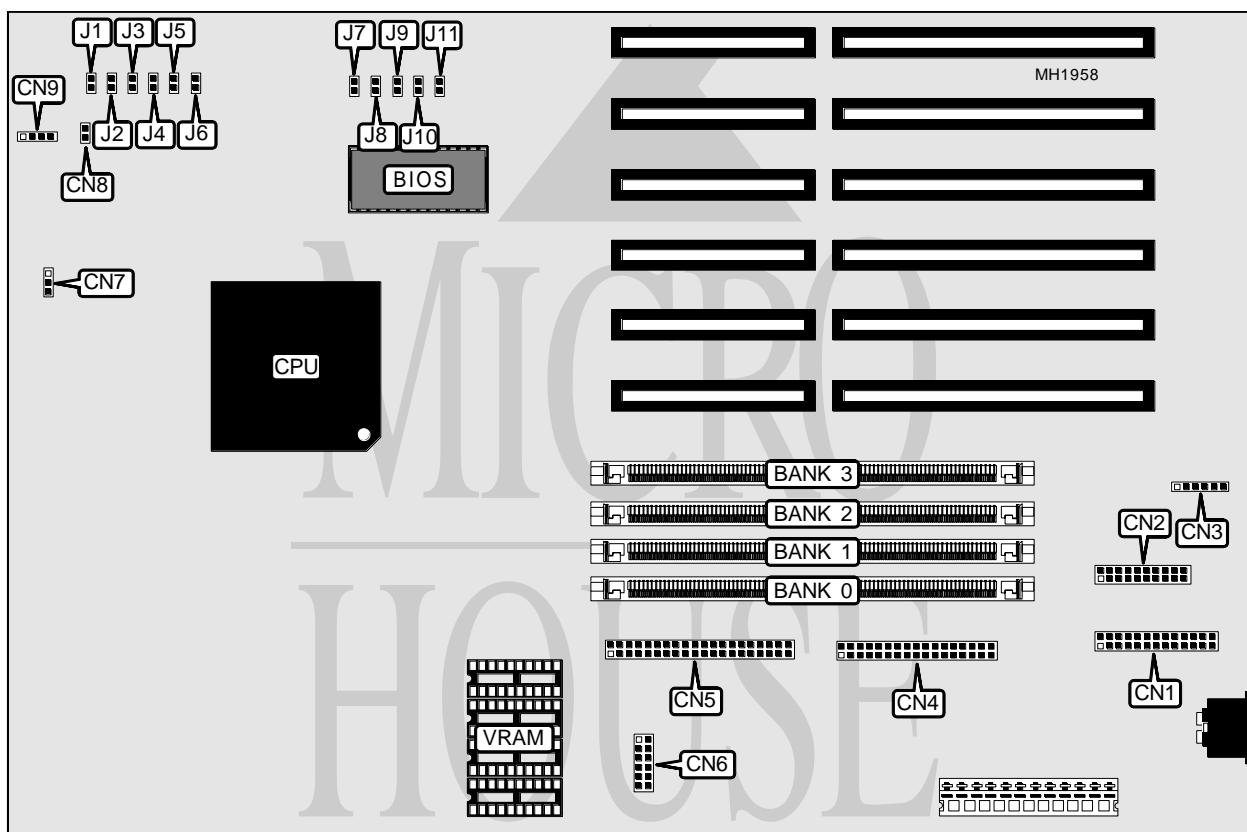

| CONNECTIONS | | | |
|-------------------------|----------|----------------------------|----------|
| Purpose | Location | Purpose | Location |
| Parallel port connector | CN1 | IDE interface | CN5 |
| Serial port 1 | CN2 | VGA connector | CN6 |
| Serial port 2 | CN2 | Fan connector | CN7 |
| PS/2 mouse port | CN3 | IDE interface LED | CN8 |
| Floppy drive interface | CN4 | External battery connector | CN9 |

Continued next page...

DELL COMPUTER CORPORATION

SYSTEM 486/XX MDT

... continued from previous page.

| USER CONFIGURABLE SETTINGS | | |
|------------------------------------|--------|----------|
| Function | Jumper | Position |
| í Mouse connector enabled at IRQ12 | J1 | Closed |
| Mouse connector disabled | J1 | Open |
| í Factory configured do not alter | J2 | Closed |
| í Factory configured do not alter | J3 | Open |
| í Factory configured do not alter | J4 | Closed |
| í Enables password feature | J5 | Closed |
| Disables password feature | J5 | Closed |
| í Enables on-board VGA controller | J6 | Closed |
| Disables on-board VGA controller | J6 | Open |
| í Factory configured do not alter | J7 | Open |
| í Factory configured do not alter | J10 | Open |
| í Factory configured do not alter | J11 | Open |

| CPU SPEED CONFIGURATION | | |
|-------------------------|--------|--------|
| Speed | J8 | J9 |
| 25MHz | Open | Closed |
| 33MHz | Closed | Open |

| DRAM CONFIGURATION | | | | |
|--------------------|-------------|-------------|-------------|-------------|
| Size | Bank 0 | Bank 1 | Bank 2 | Bank 3 |
| 4MB | (1) 1M x 36 | NONE | NONE | NONE |
| 8MB | (1) 1M x 36 | (1) 1M x 36 | NONE | NONE |
| 12MB | (1) 1M x 36 | (1) 1M x 36 | (1) 1M x 36 | NONE |
| 16MB | (1) 1M x 36 |
| 16MB | (1) 4M x 36 | NONE | NONE | NONE |
| 20MB | (1) 4M x 36 | (1) 1M x 36 | NONE | NONE |
| 24MB | (1) 4M x 36 | (1) 1M x 36 | (1) 1M x 36 | NONE |
| 28MB | (1) 4M x 36 | (1) 1M x 36 | (1) 1M x 36 | (1) 1M x 36 |
| 32MB | (1) 4M x 36 | (1) 4M x 36 | NONE | NONE |
| 36MB | (1) 4M x 36 | (1) 4M x 36 | (1) 1M x 36 | NONE |
| 40MB | (1) 4M x 36 | (1) 4M x 36 | (1) 1M x 36 | (1) 1M x 36 |
| 48MB | (1) 4M x 36 | (1) 4M x 36 | (1) 4M x 36 | NONE |
| 52MB | (1) 4M x 36 | (1) 4M x 36 | (1) 4M x 36 | (1) 1M x 36 |
| 64MB | (1) 4M x 36 |

| VRAM CONFIGURATION | | |
|--------------------|-------------|-------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (4) 256 x 4 | NONE |
| 2MB | (4) 256 x 4 | (4) 256 x 4 |

Note: Bank 0 is factory installed and not configurable.